

BM0010720

ca. 500

WAD ca. 28

Leitung H05VV-F 3G1,5mm²
cord H05VV-F 3G1,5mm²

Aderfarben: br, bl, gn/ge
wire colors: br, bl, gn/ge

WID: ca. 12mm
internal diameter: approx. 12mm

WAD: ca. 28mm
outer diameter: approx. 28mm

Wendellänge: 0,5m
spiral length: 0,5m


Arbeitslänge: 2,0m
work length: 2,0m

Dorn: 8 mm
arbor: 8 mm


Durchmesser ca. 8,4mm
diameter approx. 8,4mm

Schnittlänge SL: 3,7 m
cutting length: 3,7 m

ca. 130

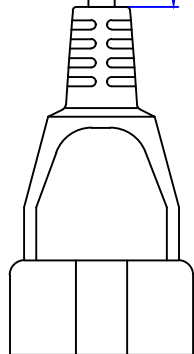

**CEE7/3 Kupplung
Typ 34**



**CEE7/7 Winkelstecker
Typ 30D**

Werkstoff / Material: AlMgSi 0,5 F22 DIN 17615 Werkstückkanten nach DIN ISO 13715		Gewicht / Weight: Bezeichnung / Title: Spiralleitung PVC H05VV-F 3G1,5mm ² , ws, Wendellänge: 0,5m Arbeitslänge: 2,0m S1: Stecker CEE7/7 TYP30 S2: Kupplung CEE7/3 TYP34		Oberfläche / Surface: El oxiert nach DIN 17611-E6 EV1 mind. 15µm		Winkel +/- 0,5° Angle +/- 0,5°	
Gezeichnet / Drawn: 17.11.2023 Baciu		Datum / Date: 17.11.2023 Rusu		Zeichn.Nr / Draw.-No.:		Freimaßtoleranz / General Tolerance:	
0-1 +/- 0,05		1-17 +/- 0,10		17-15 +/- 0,15		15-30 +/- 0,20	
30 +/- 0,25		Art.Nr.: BM0010720		Maßstab / Scale: 1:1		Format / Draw.-Size: A2	
Blatt / Sheet: 1		Datum: ACAD Über / Kabel und Leitungen/Wendeleitungen		BACH MAN		The reproduction, distribution and utilization of this document as well as the communication of its contents to others without express authorization is prohibited. Offenders will be held liable for the payment of damages. All rights reserved in the event of the grant of a patent, utility model or design.	