

INSTRUCTION

maran-DV WW / NW / CW
5013



Ta -20°- +35°C = IK 08





Diese Leuchte enthält ein Leuchtmittel der Energieeffizienzklasse **D**

This luminaire contains a light source of energy efficiency class **D**

REGIOLUX

Regiolux GmbH
Hellinger Str. 3
D-97486 Königsberg/Bay.
T 09525 89-0
<http://www.regiolux.de>
info@regiolux.de

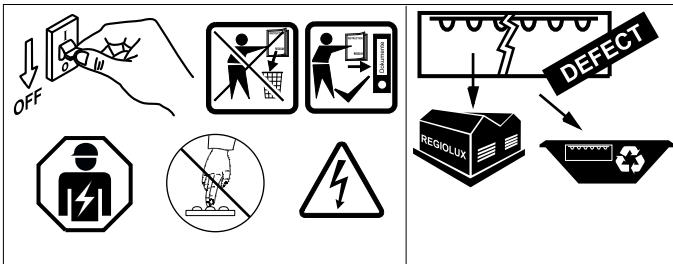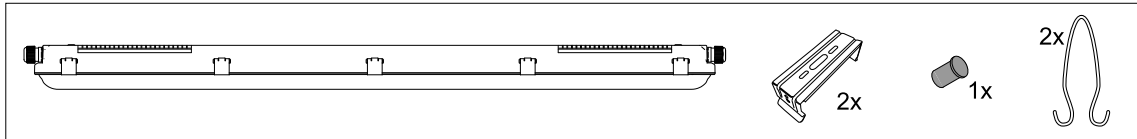

230V		* Werkseinstellung - Factory setting ¹) NW = CRI 80/4500K, SDCM/Mac Adam 6	
/1200-ETM		/1500-ETM	
WW / NW¹) / CW		WW / NW¹) / CW	
500 mA ~ 3300/3500/3400 lm	26 W	500 mA ~ 3600/3700/3600 lm	27 W
600 mA ~ 3900/4200/4000 lm	31 W*	600 mA ~ 4200/4400/4300 lm	32 W
700 mA ~ 4500/4800/4600 lm	36 W	700 mA ~ 4900/5100/4900 lm	37 W
800 mA ~ nicht freigegeben not approved		800 mA ~ 5500/5800/5600 lm	42 W*
700 mA ~ 4500/4800/4600 lm		800 mA ~ 5500/5800/5600 lm	
/1200-DALI		/1500-DALI	

