
PINOS / AGGY / OREN / TIMOR / CEBU LED driver 300 mA -1,050 mA, DALI-2 dimmable, for through-wiring Article no. 17841010





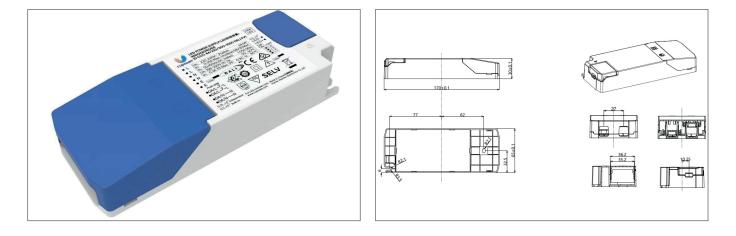

Tender

LED driver 300 mA - 1,050 mA, DALI-2 dimmable, for through-wiring, white, Rectangular. Material: Plastic, Protection class: (EN 61140) II, Voltage: 230V AC 50Hz, Power: 44 W, Dimmable: Yes, Control: DALI-2 .

Article data	
Article no.	17841010
GTIN	4255752515401
Series name	PINOS / AGGY / OREN / TIMOR / CEBU
Short description	LED driver 300 mA - 1,050 mA, DALI-2 dimmable, for through-wiring
Material	Plastic
Colour	white
Shape	Rectangular
Length	170 mm
Width	65 mm
Hight	30 mm
Weight	0.188 kg
stamp	ENEC, EL
Conformance	CE, UKCA

All technical data as well as, weight and measurements are based on rated values and had been carefully prepared. We reserve the right to make technical changes which are are important in progressing. Product pictures are examples and can vary from the original. Subject to errors. Date 07.07.2025 Orders are placed under our general terms and conditions under https://www.brumberg.com/en/terms-and-conditions/general-terms-and-conditions-of-sale/

PINOS / AGGY / OREN / TIMOR / CEBU LED driver 300 mA -1,050 mA, DALI-2 dimmable, for through-wiring Article no. 17841010



Operating technology of driver	
AC nominal voltage min	198 V
AC nominal voltage max	264 V
Frequency min	50 Hz
Frequency max	60 Hz
DC nominal voltage min	176 V
DC nominal voltage max	276 V
Protection class	П
Power	44 W
Output_ripple_current	4
Starting current	5,6 A, 50 µs
Suitable for emergency lighting	Yes
Ambient temperature	-20°C bis +45°C
measure point (tc)	70 °C
Version	ohne Konfektionierung
Power factor	0.9
max. no. lights on B10 A	37
max. no. lights on B16 A	59
max. no. lights on C16 A	59
max. no. lights on C10 A	37
Output voltage max	52.00 V
Output voltage min.	6.00 V
Flicker value Pst LM	1.00
Stroboscopic effect value SVM	.40
Control	DALI-2, PUSH-Dimm
Adjusting the current	Dip
Connection type-primary	Connection box
Connection type-secondary	Plug clamp
Number of poles	5
Flicker-free	Yes
Average nominal lifespan	100000 h
Output current	300 mA - 1.050 mA

Packing data	
Gross weight	0.248 kg
Length of packaging	140 mm
Packaging width	110 mm
Packaging hight	120 mm
	This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.
Disposal at end of life	By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.

Optional accessories

Article no.: 17846010 Spike-Protektor

Dimensions: 38 mm x 21.9 mm x 19 mm https://www.brumberg.com/fileadmin/products/Datenblatt 17846010 2021_DE.pdf

All technical data as well as, weight and measurements are based on rated values and had been carefully prepared. We reserve the right to make technical changes which are are important in progressing. Product pictures are examples and can vary from the original. Subject to errors. Date 07.07.2025 Orders are placed under our general terms and conditions under https://www.brumberg.com/en/terms-and-conditions/general-terms-and-conditions-of-sale/