





**LOOP®DL MAXI LED-Einbaudownlight, DALI dimmbar, mit Anschlussbox, Reflektor silber, hochglänzend, UGR<19**  
Article no. 12732173DA

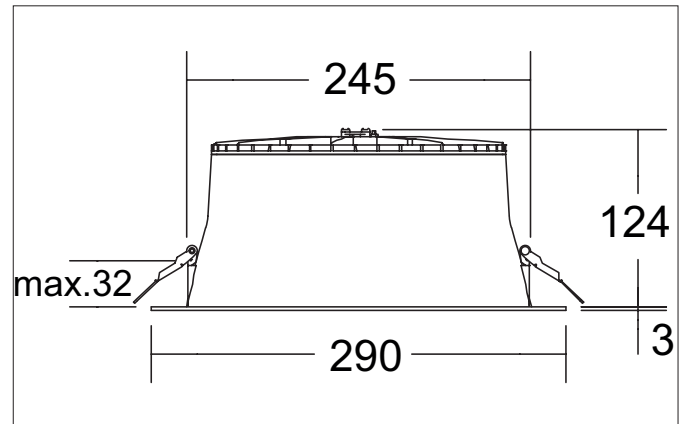

#### Tender

LED-Einbaudownlight, DALI dimmbar, mit Anschlussbox, Reflektor silber, hochglänzend, UGR<19, Round. Toolless ceiling installation by installation springs. Ceiling cut-out Ø 245 mm, Installation depth 124 mm, Outer diameter 290 mm, Weight 1,232 kg, Reflector silver with rotationssymmetrical, deep, wide distributed light intensity. Cover polycarbonat opal. Luminous flux 3.340 lm, UGR < 19, Power 1 x 26 W, Light colour warm white to neutral white, Correlated color temprature (CCT) 3.000 - 4.000 K, Colour rendering index CRI 82, Rated life time L70/B50 at 25 °C: 50.000 h, Housing material: Recycled Polycarbonate, Colour: White structure, Permissible ambient temperature (ta): -20 °C - +25 °C, Protection class (EN 61140): II, Degree of protection (DIN EN 60529): IP20. With electronic driver, DALI-2 dimmable with integrated strain relief.


**LOOP®DL MAXI LED-Einbaudownlight, DALI dimmbar, mit Anschlussbox, Reflektor silber, hochglänzend, UGR<19**

Article no. 12732173DA

**Product Benefits**

- Rundes Einbaudownlight aus Kunststoff ABS XL700 aus 93 % Post-Consumer-Recycle-Material inklusive 10 % Ocean Bound-Material mit Abdeckung Kunststoff strukturiert.
- Reflektor hochglanz silber (Auslieferung mit nachhaltiger Schutzfolie zur Vermeidung von Fingerprints).
- Einfache und werkzeuglose Montage.
- 3 CCT: 3.000 K / 3.500 K / 4.000 K umschaltbar über Dip-Schalter auf der Leuchte.
- CRI > 82, UGR < 19.
- Geringe Einbautiefe von 124 mm, Durchmesser von 290 mm, Deckenausschnitt 245 mm.
- Deckenstärke maximal 32 mm.
- Lieferung inklusive dimmbarem Betriebsgerät und 5-poliger Anschlussbox mit Zugentlastung.
- DALI dimmbar (DALI-2). Als Variante auch in schaltbar erhältlich.

| Article data       |                                                                                             |
|--------------------|---------------------------------------------------------------------------------------------|
| Article no.        | 12732173DA                                                                                  |
| GTIN               | 4255752510802                                                                               |
| Series name        | LOOP®DL MAXI                                                                                |
| Short description  | LED-Einbaudownlight, DALI dimmbar, mit Anschlussbox, Reflektor silber, hochglänzend, UGR<19 |
| Material           | Recycled Polycarbonate                                                                      |
| Colour             | White                                                                                       |
| Type of surface    | Structure                                                                                   |
| Shape              | Round                                                                                       |
| Outer diameter     | 290 mm                                                                                      |
| Built-in diameter  | 245 mm                                                                                      |
| Installation depth | 124 mm                                                                                      |
| Hight              | 3 mm                                                                                        |
| Scope of delivery  | inkl. Konverter zum Anschluss an 230 V-Netzspannung, schaltbar und Anschlussbox             |
| Weight             | 1.232 kg                                                                                    |
| Conformance        | CE, UKCA                                                                                    |

| Lighting technology          |                             |
|------------------------------|-----------------------------|
| Colour temperature           | 3.000 K / 3.500 K / 4.000 K |
| Light colour                 | White                       |
| Color Temperature 1          | 3,000 K                     |
| Color Temperature 2          | 3,500 K                     |
| Color Temperature 3          | 4,000 K                     |
| Light output                 | Direct                      |
| Luminous flux                | 3,340 lm                    |
| System efficiency            | 128 lm/W                    |
| Colour rendering             | CRI 82                      |
| Reflector                    | High-gloss                  |
| Reflector colour             | silver                      |
| Beam angle                   | 66°                         |
| Glare evaluation             | UGR < 19                    |
| Light sharing                | Symmetric                   |
| Adjustable color temperature | Stages                      |


**LOOP®DL MAXI LED-Einbaudownlight, DALI dimmbar, mit Anschlussbox, Reflektor silber, hochglänzend, UGR<19**

Article no. 12732173DA

| Operating technology of the luminaire |                                                                                                                                                          |
|---------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
| System output                         | 26 W                                                                                                                                                     |
| Voltage type                          | AC                                                                                                                                                       |
| AC nominal voltage max                | 230 V                                                                                                                                                    |
| Frequency max                         | 50 Hz                                                                                                                                                    |
| Lamp                                  | LED not changeable                                                                                                                                       |
| Lamp holder                           | Without fitting                                                                                                                                          |
| Protection class                      | II                                                                                                                                                       |
| Degree of protection                  | IP20                                                                                                                                                     |
| Dimmable                              | Yes                                                                                                                                                      |
| Control                               | DALI-2                                                                                                                                                   |
| Bulb change possible                  | The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person. |
| Rated life time L70/B50 at 25 °C      | 50,000 h                                                                                                                                                 |
| Energy efficiency class               | nicht erforderlich                                                                                                                                       |

| Mounting technology         |                                           |
|-----------------------------|-------------------------------------------|
| Mounting method             | Recessed mounting                         |
| Place of installation       | Ceiling-mounted                           |
| Adjustability               | Not adjustable                            |
| Max. ceiling thickness      | 32 mm                                     |
| Further references          | No cover with thermal insulation material |
| Material cover              | Polycarbonat opal                         |
| Suitable for through-wiring | Yes                                       |

| Packing data            |                                                                                                                                                                                                                                                                                                                                                                                |
|-------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Gross weight            | 1.423 kg                                                                                                                                                                                                                                                                                                                                                                       |
| Length of packaging     | 295 mm                                                                                                                                                                                                                                                                                                                                                                         |
| Packaging width         | 295 mm                                                                                                                                                                                                                                                                                                                                                                         |
| Packaging height        | 135 mm                                                                                                                                                                                                                                                                                                                                                                         |
| Disposal at end of life | <p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p> |