


LED converter 700 mA, DALI dimmable, (digital)
Article no. 17782010

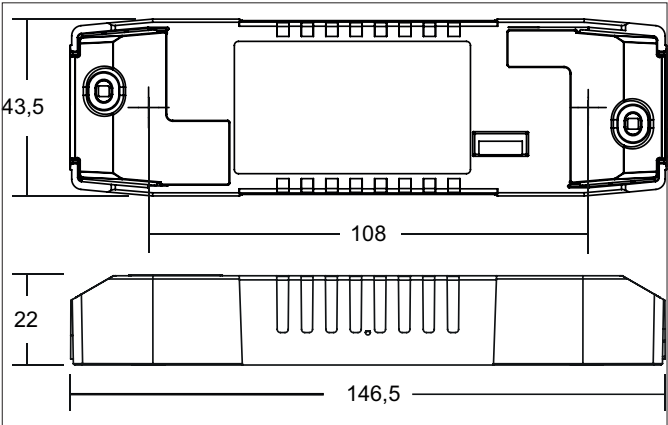

Tender

LED converter 700 mA, DALI dimmable, (digital), white, rectangular. This control gear meets the requirements for safety lighting systems in accordance with DIN EN 50172 VDE 0108-100:2005-01. This converter is protected against overvoltage and short circuit as well as thermal and electrical overload by fuses. The input and output terminals are suitable for cables with a cross-section of 0.75-1.5 mm². Material: Plastic, Protection class on room side: according to DIN EN 60529: IP20, Protection class: (EN 61140) II, Voltage: 230V AC 50Hz, Power: 38 W, Dimmable: Yes, Type of dimming: DALI-2.

| Article data | |
|-------------------|--|
| Article no. | 17782010 |
| GTIN | 4255752502975 |
| Short description | LED converter 700 mA, DALI dimmable, (digital) |
| Material | Plastic |
| Colour | White |
| Shape | Rectangular |
| Length | 146.5 mm |
| Width | 43.5 mm |
| Hight | 22 mm |
| Weight | 0.113 kg |
| stamp | ENEC 05, EL |
| Conformance | CE, UKCA |

LED converter 700 mA, DALI dimmable, (digital)

Article no. 17782010

| Operating technology of driver | |
|------------------------------------|-------------------|
| AC nominal voltage min | 198 V |
| AC nominal voltage max | 264 V |
| Frequency min | 50 Hz |
| Frequency max | 60 Hz |
| DC nominal voltage min | 176 V |
| DC nominal voltage max | 275 V |
| Protection class | II |
| Degree of protection | IP20 |
| Power min | 3.5 W |
| Power | 38 W |
| Output_ripple_current | 3 |
| Starting current | 5 A, 50 µs |
| Suitable for emergency lighting | No |
| measure point (tc) | 80 °C |
| Version | without |
| Power factor | 0.95 |
| max. no. lights on B16 A | 50 |
| Output voltage max | 54.00 V |
| Output voltage min. | 10.00 V |
| Flicker value Pst LM | 1.00 |
| Stroboscopic effect value SVM | .40 |
| Control | DALI-2 |
| Number of poles | 4 |
| Environment temperature (ta) | -25 °C bis +40 °C |
| Measure point (tc) | max. +80 °C |
| Output current | 700 mA |
| Safety devices against overvoltage | yes |

| Packing data | |
|-------------------------|--|
| Gross weight | 0.131 kg |
| Length of packaging | 60 mm |
| Packaging width | 27 mm |
| Packaging height | 150 mm |
| Disposal at end of life | <p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p> |