




PEPA LED-Konverter zu 48 V-Schienensystem, DALI-Signal wird durchgeschliffen und muss sep. zugeführt werden
Article no. 17480200

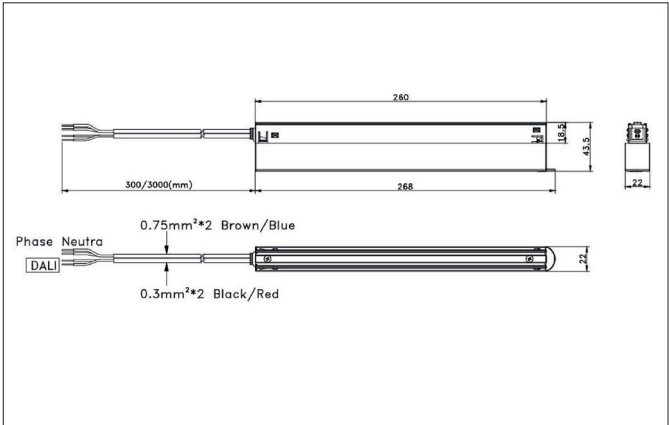

Tender	
LED-Konverter zu 48 V-Schienensystem, DALI-Signal wird durchgeschliffen und muss sep. zugeführt werden, black. Power: 250 W.	

Article data	
Article no.	17480200
GTIN	4255752520146
Series name	PEPA
Short description	LED-Konverter zu 48 V-Schienensystem, DALI-Signal wird durchgeschliffen und muss sep. zugeführt werden
Material	Plastic
Colour	Black
Shape	Rectangular
Length	268 mm
Width	22 mm
Hight	43.5 mm
Weight	0.380 kg
Length of the connection line	3,000 mm
Conformance	CE



PEPA LED-Konverter zu 48 V-Schienensystem, DALI-Signal wird durchgeschliffen und muss sep. zugeführt werden

Article no. 17480200

Operating technology of driver	
AC nominal voltage min	176 V
AC nominal voltage max	264 V
Frequency min	50 Hz
Frequency max	60 Hz
Protection class	II
Degree of protection	IP20
Power min	1 W
Power max.	250 W
Output_ripple_current	1
Starting current	80 A, 200 us
Suitable for emergency lighting	No
Ambient temperature	-25°C bis +45°C
measure point (tc)	85 °C
Version	inkl. 3.000 mm Anschlussleitung, 4-polig
Power factor	0.95
max. no. lights on B16 A	12
max. no. lights on C16 A	19
Output voltage max	48.00 V
Output voltage min.	48.00 V
Control	on/off
Connection type-primary	Cable
Connection type-secondary	Plug clamp
Average nominal lifespan	50000 h
Output current	5.210 mA
Length of the connection line	3,000 mm

Packing data	
Gross weight	0.435 kg
Length of packaging	315 mm
Packaging width	200 mm
Packaging height	325 mm
Disposal at end of life	<p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p>