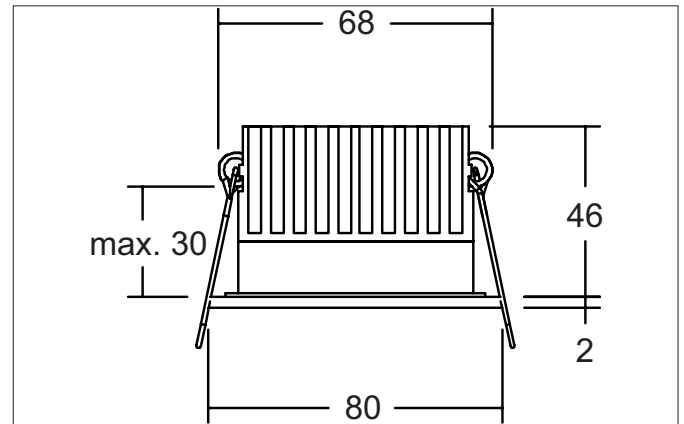


ODEMAR LED recessed downlight, integrated converter (DOB), trailing edge dimmable, dim2warm, with connection box

Article no. 12650183DW

**Tender**

LED recessed downlight, integrated converter (DOB), trailing edge dimmable, dim2warm, with connection box, Round. Toolless ceiling installation by installation springs. Ceiling cut-out Ø 68 mm, Installation depth 46 mm, Outer diameter 80 mm, Weight 0,156 kg, Reflector silver with rotationssymmetrical, deep, wide distributed light intensity. Cover polycarbonat clear. Luminous flux 370 lm, Power 1 x 6 W, Light colour warm white, Correlated color temprature (CCT) 3.000 K, Colour rendering index CRI > 90, Rated life time L70/B50 at 25 °C: 50.000 h, Housing material: Aluminium / Polycarbonate, Colour: Black structure, Permissible ambient temperature (ta): -20 °C - +25 °C, Protection class (EN 61140): II, Degree of protection (DIN EN 60529): IP20. With electronic driver, Trailing-edge phase dimmable.

Product Benefits

- Runder Einbaustrahler vertieft aus massivem Aluminium mit Polycarbonatabdeckung.
- Einfache und werkzeuglose Montage.
- CRI > 90.
- Geringe Einbautiefe 46 mm, Durchmesser 80 mm, Deckenausschnitt 68 mm.
- Deckenstärke maximal 30 mm.
- Zwei Oberflächenausführungen lieferbar.
- Mit integriertem Konverter (DOB) zum Anschluss an 230 V-Netzspannung.
- Auslieferung mit Anschlussbox zur schnellen Verbindung.
- Ausführung dim2warm (3.000 K - 1.800 K): wird die Leuchte gedimmt, verringert sich die Farbtemperatur.
- Phasenabschnitt dimmbar.
- Auch in Ausführung statisch 3.000 K lieferbar.

ODEMAR LED recessed downlight, integrated converter (DOB), trailing edge dimmable, dim2warm, with connection box

Article no. 12650183DW

Article data	
Article no.	12650183DW
GTIN	4255752519713
Series name	ODEMAR
Short description	LED recessed downlight, integrated converter (DOB), trailing edge dimmable, dim2warm, with connection box
Material	Aluminium / Polycarbonate
Colour	Black
Type of surface	Structure
Shape	Round
Outer diameter	80 mm
Built-in diameter	68 mm
Installation depth	46 mm
Hight	2 mm
Scope of delivery	inkl. Anschlussbox zur Durchgangsverdrahtung, 3-polig
Weight	0.156 kg
Conformance	CE, UKCA

Packing data	
Gross weight	0.206 kg
Length of packaging	95 mm
Packaging width	90 mm
Packaging hight	75 mm
Disposal at end of life	<p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p>