





GRAHAM LED-Pendelleuchte, Phasenabschnitt dimmbar
Article no. 57440183

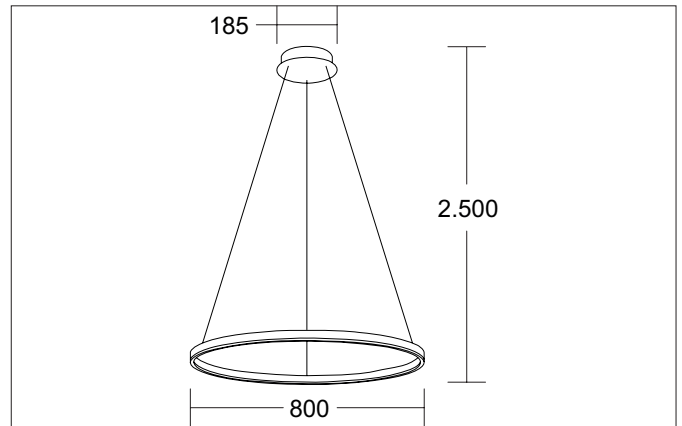

Tender

Round LED pendant luminaire, dimmable trailing edge, luminaire diameter 800 mm, height 35 mm, for pendant mounting. Pendant length max. 2,500 mm, weight 2.800 kg, with rotationally symmetrical narrow-wide beam light distribution. Opal plastic cover, rated luminous flux 2,300 lm, rated wattage 1 x 50 W, warm white light color, most similar color temperature (CCT) 3,000 K, general color rendering index CRI > 80, service life L70/B50 at 25 °C: 50,000 h, service life L80/B50 at 25 °C: 50,000 h, housing material: aluminum / acrylic, color: textured black, permissible ambient temperature (ta): -20 °C - +25 °C, protection class (EN 61140): I, degree of protection (DIN EN 60529): IP20. With electronic control gear, trailing edge dimmable.

Product Benefits

- Dekorative Pendelleuchte mit phasendimmbarem Konverter.
- Bauseitig kürzbare Pendellänge von 2.500 mm.
- Dazu passend 3-Ring-Pendelleuchte (57441183) erhältlich – beispielsweise für die Betonung von speziellen Bereichen.


GRAHAM LED-Pendelleuchte, Phasenabschnitt dimmbar

Article no. 57440183

Article data	
Article no.	57440183
GTIN	4255752522836
Series name	GRAHAM
Short description	LED-Pendelleuchte, Phasenabschnitt dimmbar
Material	Aluminium / Acrylic
Colour	Black
Type of surface	Structure
Shape	Round
Outer diameter	800 mm
Height	35 mm
Scope of delivery	inkl. Konverter zum Anschluss an 230 V-Netzspannung, Phasenabschnitt dimmbar
Weight	2.800 kg
Conformance	CE, UKCA

Lighting technology	
Colour temperature	3.000 K
Light colour	White
Light output	Direct
Luminous flux	2,300 lm
System efficiency	46 lm/W
McAdam-Step	McAdam-Step 3
Colour rendering	CRI > 80
Reflector	Without
Beam angle	110°
Light sharing	Symmetric
Adjustable color temperature	No

Operating technology of the luminaire	
System output	50 W
Voltage type	AC
AC nominal voltage max	230 V
Frequency max	50 Hz
Lamp	LED
Protection class	I
Degree of protection	IP20
Dimmable	Yes
Control	Trailing-edge phase
Bulb change possible	The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person.
Rated life time L70/B50 at 25 °C	50,000 h
Rated life time L80/B50 at 25 °C	50.000 h

Mounting technology	
Mounting method	Surface mounting
Place of installation	Ceiling-mounted
Adjustability	Not adjustable
Pendulum length max.	2,500 mm
Material cover	Plastic, opal



GRAHAM LED-Pendelleuchte, Phasenabschnitt dimmbar
Article no. 57440183

Packing data	
Gross weight	5.4 kg
Length of packaging	840 mm
Packaging width	840 mm
Packaging hight	100 mm
Disposal at end of life	<p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p>