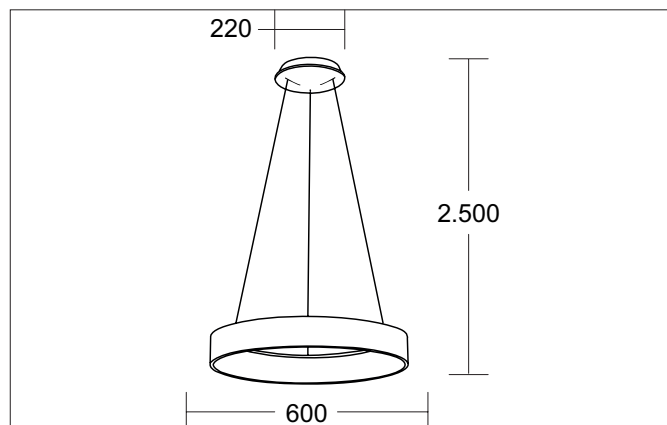



GEORGA LED-Pendelleuchte, 2CCT, Phasenabschnitt dimmbar

Article no. 57429183


Tender

Round LED pendant luminaire, 2CCT, trailing edge dimmable, luminaire diameter 600 mm, height 85 mm, for pendant mounting. Pendant length max. 2,500 mm, weight 3.600 kg, with rotationally symmetrical narrow-wide beam light distribution. Opal plastic cover, rated luminous flux 1,950 lm, rated wattage 1 x 42 W, warm white light color, most similar color temperature (CCT) 3,000 K, general color rendering index CRI > 80, service life L70/B50 at 25 °C: 50,000 h, service life L80/B50 at 25 °C: 50,000 h, housing material: steel / plastic, color: textured black, permissible ambient temperature (ta): -20 °C - +25 °C, protection class (EN 61140): I, degree of protection (DIN EN 60529): IP20. With electronic control gear, trailing edge dimmable.

Product Benefits

- Dekorative Pendelleuchte mit phasendimmbarem Konverter.
- Bauseitig kürzbare Pendellänge von 2.500 mm.
- Dazu passend ist eine Anbauleuchte (57428183) erhältlich - beispielsweise für die Beleuchtung von Bereichen, in denen eine Pendelabhängung nicht möglich oder nicht gewünscht ist.


GEORGA LED-Pendelleuchte, 2CCT, Phasenabschnitt dimmbar

Article no. 57429183

Article data	
Article no.	57429183
GTIN	4255752522829
Series name	GEORGA
Short description	LED-Pendelleuchte, 2CCT, Phasenabschnitt dimmbar
Material	Steel / Plastic
Colour	Black
Type of surface	Structure
Shape	Round
Outer diameter	600 mm
Hight	85 mm
Scope of delivery	inkl. Konverter zum Anschluss an 230 V-Netzspannung, Phasenabschnitt dimmbar
Weight	3.600 kg
Conformance	CE, UKCA

Lighting technology	
Colour temperature	3.000 K / 4.000 K
Light colour	White
Light output	Direct
Luminous flux	1,950 lm
System efficiency	46 lm/W
McAdam-Step	McAdam-Step 3
Colour rendering	CRI > 80
Reflector	Without
Beam angle	110°
Light sharing	Symmetric
Adjustable color temperature	Stages

Operating technology of the luminaire	
System output	42 W
Voltage type	AC
AC nominal voltage max	230 V
Frequency max	50 Hz
Lamp	LED
Protection class	I
Degree of protection	IP20
Dimmable	Yes
Control	Trailing-edge phase
Bulb change possible	The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person.
Rated life time L70/B50 at 25 °C	50,000 h
Rated life time L80/B50 at 25 °C	50.000 h

Mounting technology	
Mounting method	Surface mounting
Place of installation	Ceiling-mounted
Adjustability	Not adjustable
Pendulum length max.	2,500 mm
Material cover	Plastic, opal



GEORGA LED-Pendelleuchte, 2CCT, Phasenabschnitt dimmbar
Article no. 57429183

Packing data	
Gross weight	4.8 kg
Length of packaging	640 mm
Packaging width	640 mm
Packaging hight	130 mm
Disposal at end of life	<p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p>