


GEORGA LED pendant light, 2CCT, switchable
Article no. 57429183

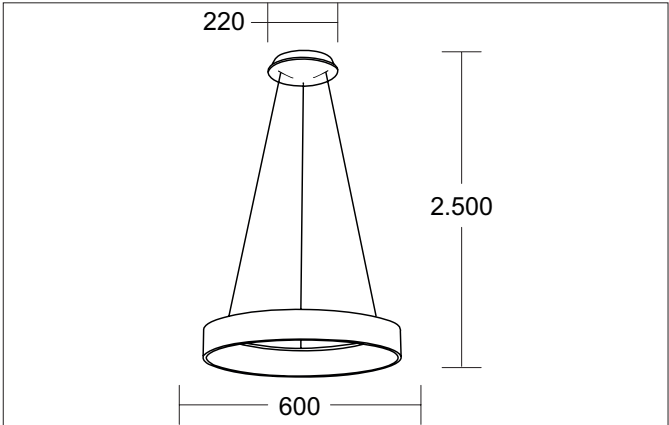

Tender	
LED pendant light, 2CCT, switchable, Round.Luminaire diameter 600.0 mm, Hight 85.0 mm, for pendulum mounting. Pendulum length max. 2500.0 mm Weight 3.73 kg, with rotationssymmetrical, deep, wide distributed light intensity. Cover plastic, opal. Luminous flux 1.950 lm, Power 1 x 38 W, Light colour warm white, Correlated color temprature (CCT) 3.000 K, Colour rendering index CRI > 80, Rated life time L70/B50 at 25 °C: 50.000 h, Rated life time L80/B50 at 25 °C: 50.000 h, Housing material: Aluminium / Plastic, Colour: White structure, Permissible ambient temperature (ta): -20 °C - +25 °C, Protection class (EN 61140): III, Degree of protection (DIN EN 60529): IP20. With electronic driver, on/off switchable.	

Article data	
Article no.	57429183
GTIN	4255752522829
Series name	GEORGA
Short description	LED pendant light, 2CCT, switchable
Material	Aluminium / Plastic
Colour	White
Type of surface	Structure
Shape	Round
Outer diameter	600 mm
Hight	85 mm
Scope of delivery	incl. converter for connection to 230 V mains voltage
Weight	3.600 kg
Conformance	CE, UKCA

GEORGA LED pendant light, 2CCT, switchable

Article no. 57429183

Lighting technology	
Colour temperature	3.000 K / 4.000 K
Light colour	White
Light output	Direct
Luminous flux	1,950 lm
System efficiency	51 lm/W
McAdam-Step	McAdam-Step 3
Colour rendering	CRI > 80
Reflector	Without
Beam angle	110°
Light sharing	Symmetric
Adjustable color temperature	Stages

Operating technology of the luminaire	
System output	38 W
Voltage type	AC
AC nominal voltage max	230 V
Frequency max	50 Hz
Lamp	LED
Protection class	III
Degree of protection	IP20
Control	on/off
Bulb change possible	The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person.
Rated life time L70/B50 at 25 °C	50,000 h
Rated life time L80/B50 at 25 °C	50.000 h

Mounting technology	
Mounting method	Surface mounting
Place of installation	Ceiling-mounted
Adjustability	Not adjustable
Pendulum length max.	2,500 mm
Material cover	Plastic, opal

Packing data	
Gross weight	4.8 kg
Length of packaging	640 mm
Packaging width	640 mm
Packaging height	130 mm
Disposal at end of life	<p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p>