




## GRAHAM LED-Pendelleuchte, Phasenabschnitt dimmbar

Article no. 57441183

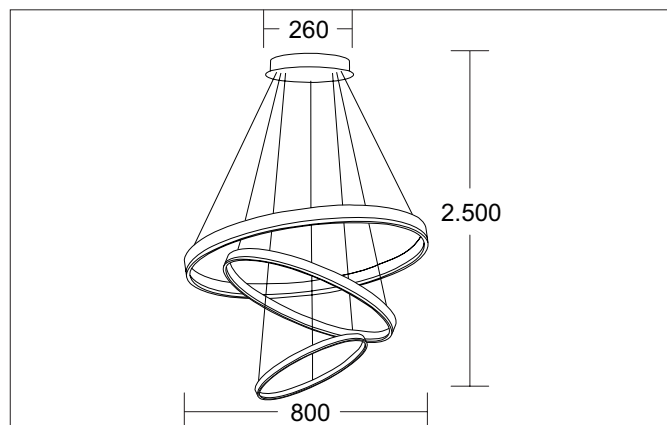

### Tender

Round LED pendant luminaire, dimmable trailing edge, luminaire diameter 800 mm, height 35 mm, for pendant mounting. Pendant length max. 2,500 mm, weight 4.6 kg, with rotationally symmetrical narrow-wide beam light distribution. Opal plastic cover, rated luminous flux 5,600 lm, rated wattage 1 x 120 W, warm white light color, most similar color temperature (CCT) 3,000 K, general color rendering index CRI > 80, service life L70/B50 at 25 °C: 50,000 h, service life L80/B50 at 25 °C: 50,000 h, housing material: aluminum / acrylic, color: textured black, permissible ambient temperature (ta): -20 °C - +25 °C, protection class (EN 61140): I, degree of protection (DIN EN 60529): IP20. With electronic control gear, trailing edge dimmable.

### Product Benefits

- Dekorative 3-Ring-Pendelleuchte mit phasendimmbarem Konverter.
- Ringdurchmesser 800 mm, 600 mm und 400 mm.
- Bauseitig kürzbare Pendellänge von 2.500 mm.
- Dazu passend 1-Ring-Pendelleuchte (57440183) erhältlich - beispielsweise für Standardbereiche.


**GRAHAM LED-Pendelleuchte, Phasenabschnitt dimmbar**

Article no. 57441183

Article data	
Article no.	57441183
GTIN	4255752522843
Series name	GRAHAM
Short description	LED-Pendelleuchte, Phasenabschnitt dimmbar
Material	Aluminium / Acrylic
Colour	Black
Type of surface	Structure
Shape	Round
Outer diameter	800 mm
Hight	35 mm
Scope of delivery	inkl. Konverter zum Anschluss an 230 V-Netzspannung, Phasenabschnitt dimmbar
Weight	4.6 kg
Conformance	CE, UKCA

Lighting technology	
Colour temperature	3.000 K
Light colour	White
Light output	Direct
Luminous flux	5,600 lm
System efficiency	47 lm/W
McAdam-Step	McAdam-Step 3
Colour rendering	CRI > 80
Reflector	Without
Beam angle	110°
Light sharing	Symmetric
Adjustable color temperature	No

Operating technology of the luminaire	
System output	120 W
Voltage type	AC
AC nominal voltage max	230 V
Frequency max	50 Hz
Lamp	LED
Protection class	I
Degree of protection	IP20
Dimmable	Yes
Control	Trailing-edge phase
Bulb change possible	The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person.
Rated life time L70/B50 at 25 °C	50,000 h
Rated life time L80/B50 at 25 °C	50.000 h

Mounting technology	
Mounting method	Surface mounting
Place of installation	Ceiling-mounted
Adjustability	Not adjustable
Pendulum length max.	2,500 mm
Material cover	Plastic, opal



**GRAHAM LED-Pendelleuchte, Phasenabschnitt dimmbar**  
Article no. 57441183

Packing data	
Gross weight	8.05 kg
Length of packaging	840 mm
Packaging width	840 mm
Packaging hight	85 mm
Disposal at end of life	<p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p>