





**DOLOK-R LED surface-mounted ceiling downlight, trailing edge dimmable**

Article no. 12125173

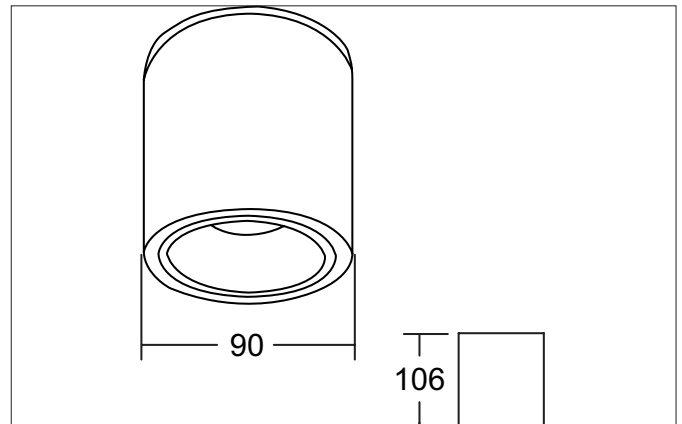

**Tender**

Surface-mounted LED ceiling downlight, trailing edge dimmable, luminaire diameter 90 mm, height 106 mm, weight 0.576 kg, silver reflector with rotationally symmetrical narrow-wide beam light distribution. Textured plastic cover, rated luminous flux 900 lm, rated wattage 1 x 14.6 W, light color warm white, most similar color temperature (CCT) 3,000 K, general color rendering index CRI 83, housing material: aluminum / PMMA, color: textured white, permissible ambient temperature (ta): -20 °C - +25 °C, protection class (EN 61140): I, degree of protection (DIN EN 60529): IP20. With electronic control gear, trailing edge dimmable.

**Product Benefits**

- Deckenanbau-Downlight mit umlaufenden Lichtfugen (decken- und randunterseitig).
- Befestigung an der Decke über Bajonett.
- Phasenabschnitt dimmbar.
- In den Ausführungen rund und quadratisch und weiß struktur und schwarz struktur lieferbar.


**DOLOK-R LED surface-mounted ceiling downlight, trailing edge dimmable**

Article no. 12125173

Article data	
Article no.	12125173
GTIN	4255752519911
Series name	DOLOK-R
Short description	LED surface-mounted ceiling downlight, trailing edge dimmable
Material	Aluminium / PMMA
Colour	white structure
Type of surface	Structure
Shape	Round
Outer diameter	90 mm
Hight	106 mm
Weight	0.576 kg
Conformance	CE, UKCA

Lighting technology	
Colour temperature	3.000 K
Light colour	white
Light output	Direct/Indirect
Luminous flux	900 lm
System efficiency	62 lm/W
Colour rendering	CRI 83
Reflector	Faceted
Reflector colour	silver
Beam angle	40°
Light sharing	Symmetric
Adjustable color temperature	No

Operating technology of the luminaire	
System output	14.6 W
Voltage type	AC
AC nominal voltage max	230 V
Frequency max	50 Hz
Lamp	LED
Lamp holder	LED
Protection class	I
Degree of protection	IP20
Dimmable	Yes
Control	Trailing-edge phase
Bulb change possible	The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person.
Energy efficiency class	nicht erforderlich

Mounting technology	
Mounting method	Surface mounting
Place of installation	Ceiling-mounted
Adjustability	Not adjustable
Material cover	Plastic, structured

Packing data	
Gross weight	0.626 kg
Length of packaging	100 mm
Packaging width	100 mm
Packaging hight	135 mm
Disposal at end of life	<p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p>

**DOLOK-R LED surface-mounted ceiling downlight, trailing edge  
dimmable**

Article no. 12125173



**BRUMBERG**

Light. Since 1873.