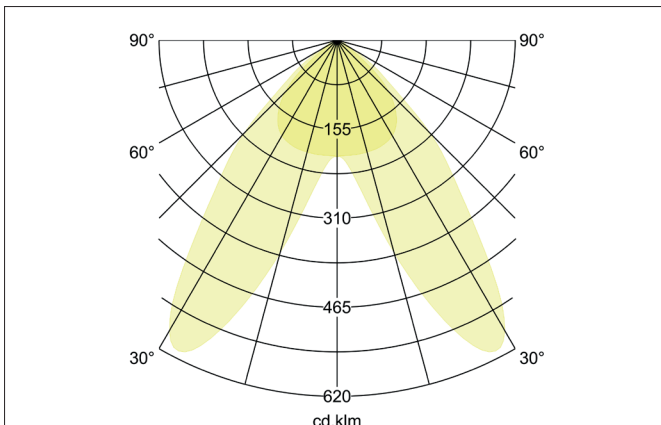


BALI MINI LED track spotlight, rotatable, DALI
 Article no. 44012163DA

Tender

LED track spotlight, rotatable, DALI, Rectangular. Luminaire length 294.0 mm, Luminaire width 64.0 mm, Hight 25.0 mm Weight 0.68 kg, double asymmetric Cover PMMA. Luminous flux 2.600 lm, Power 1 x 20 W, Light colour warm white, Correlated color temperature (CCT) 3.000 K, Colour rendering index CRI > 80, Rated life time L70/B50 at 25 °C: 60.000 h, Rated life time L80/B50 at 25 °C: 50.000 h, Housing material: Steel / Plastic, Colour: Silver structure, Permissible ambient temperature (ta): -20 °C - +25 °C, Protection class (EN 61140): II, Degree of protection (DIN EN 60529): IP20, shock resistance according to IEC62262: IK02 .With electronic driver, DALI-2 dim-

| Article data | |
|-------------------|--------------------------------------|
| Article no. | 44012163DA |
| GTIN | 4255752512448 |
| Series name | BALI MINI |
| Short description | LED track spotlight, rotatable, DALI |
| Material | Steel / Plastic |
| Colour | Silver |
| Type of surface | Structure |
| Shape | Rectangular |
| Length | 294 mm |
| Width | 64 mm |
| Hight | 25 mm |
| Weight | 0.680 kg |
| Conformance | CE, UKCA |

BALI MINI LED track spotlight, rotatable, DALI

Article no. 44012163DA

| Lighting technology | |
|------------------------------|-------------------|
| Colour temperature | 3.000 K |
| Light colour | White |
| Light output | Direct |
| Luminous flux | 2,600 lm |
| System efficiency | 130 lm/W |
| McAdam-Step | McAdam-Step 3 |
| Colour rendering | CRI > 80 |
| Beam angle longitudinal | 96° |
| Beam angle transverse | 83° |
| Light sharing | Double asymmetric |
| Adjustable color temperature | No |

| Operating technology of the luminaire | |
|---------------------------------------|--|
| System output | 20 W |
| Voltage type | AC |
| AC nominal voltage min | 220 V |
| AC nominal voltage max | 240 V |
| Frequency max | 60 Hz |
| Frequency min | 50 Hz |
| Lamp | LED |
| Lamp holder | LED |
| Protection class | II |
| Degree of protection | IP20 |
| Dimmable | Yes |
| Control | DALI-2 |
| Bulb change possible | The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person. |
| Rated life time L70/B50 at 25 °C | 60,000 h |
| Rated life time L80/B50 at 25 °C | 50.000 h |

| Mounting technology | |
|-----------------------------|-------------------------|
| Mounting method | Conductor rail mounting |
| Place of installation | Ceiling-mounted |
| Adjustability | Rotable |
| Rotation angle | 355° |
| Impact resistance | IK02 |
| Material cover | PMMA |
| Suitable for through-wiring | No |

| Packing data | |
|-------------------------|---|
| Gross weight | 0.748 kg |
| Length of packaging | 325 mm |
| Packaging width | 150 mm |
| Packaging height | 71 mm |
| Disposal at end of life | This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately. By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment. |