
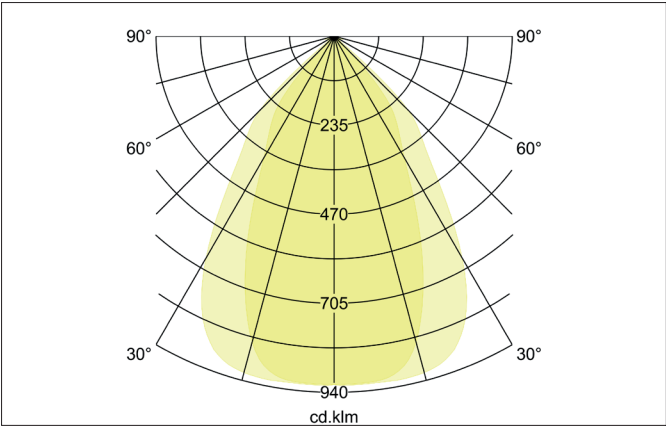


BALI MINI-S LED track spotlight, rotatable, DALI
Article no. 44013163DA

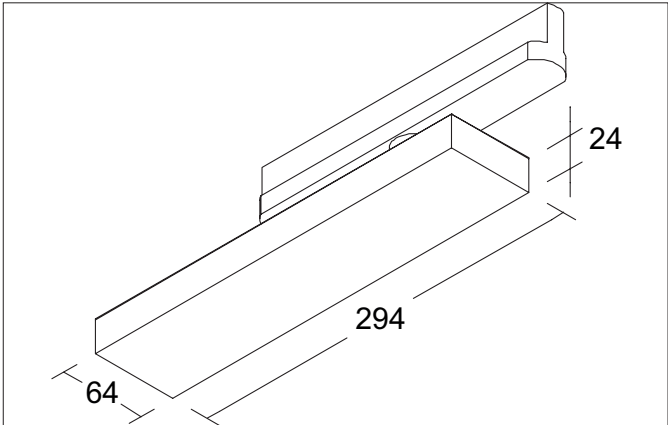

Tender
Rectangular LED track spotlight, rotatable and tiltable, DALI dimmable, luminaire length 294 mm, luminaire width 64 mm, height 25 mm, weight 0.690 kg, with rotationally symmetrical narrow-wide beam light distribution. PMMA cover, rated luminous flux 2,600 lm, rated wattage 1 x 20 W, warm white light color, most similar color temperature (CCT) 3,000 K, general color rendering index CRI > 80, service life L70/B50 at 25 °C: 60,000 h, service life L80/B50 at 25 °C: 50,000 h, housing material: steel / plastic, color: textured silver, permissible ambient temperature (ta): -20 °C - +25 °C, protection class (EN 61140): II, degree of protection (DIN EN 60529): IP20, degree of impact resistance according to IEC62262: IK02. With electronic control gear, DALI-2 dimmable.

Article data	
Article no.	44013163DA
GTIN	4255752512578
Series name	BALI MINI-S
Short description	LED track spotlight, rotatable, DALI
Material	Steel / Plastic
Colour	Silver
Type of surface	Structure
Shape	Rectangular
Length	294 mm
Width	64 mm
Height	25 mm
Weight	0.690 kg
Conformance	CE, UKCA

BALI MINI-S LED track spotlight, rotatable, DALI

Article no. 44013163DA

Lighting technology	
Colour temperature	3.000 K
Light colour	White
Light output	Direct
Luminous flux	2,600 lm
System efficiency	130 lm/W
McAdam-Step	McAdam-Step 3
Colour rendering	CRI > 80
Beam angle longitudinal	72°
Beam angle transverse	53°
Light sharing	Symmetric
Adjustable color temperature	No

Operating technology of the luminaire	
System output	20 W
Voltage type	AC
AC nominal voltage min	220 V
AC nominal voltage max	240 V
Frequency max	60 Hz
Frequency min	50 Hz
Lamp	LED
Lamp holder	LED
Protection class	II
Degree of protection	IP20
Dimmable	Yes
Control	DALI-2
Bulb change possible	The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person.
Rated life time L70/B50 at 25 °C	60,000 h
Rated life time L80/B50 at 25 °C	50.000 h
Energy efficiency class	nicht erforderlich
max. no. lights on B16 A	33
max. no. lights on C16 A	84

Mounting technology	
Mounting method	Conductor rail mounting
Place of installation	Ceiling-mounted
Adjustability	Rotable and pivoted
Swivel angle	45°
Rotation angle	355°
Impact resistance	IK02
Material cover	PMMA
Suitable for through-wiring	No

Packing data	
Gross weight	0.759 kg
Length of packaging	340 mm
Packaging width	170 mm
Packaging height	100 mm
Disposal at end of life	<p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p>