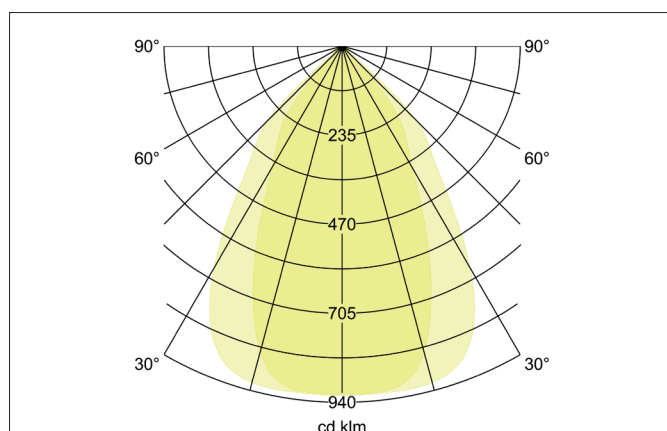
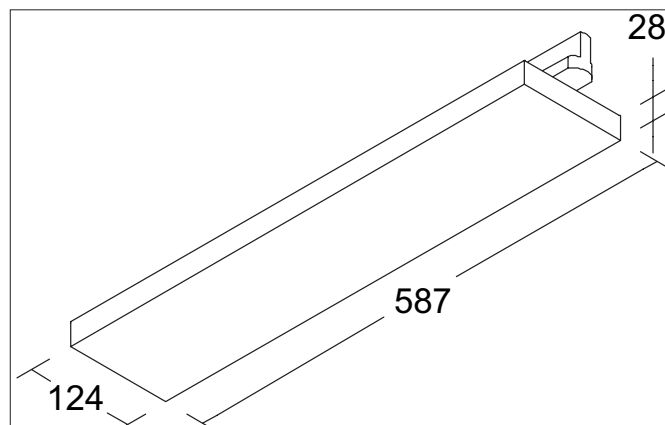


BALI MEGA LED track spotlight, on/off

Article no. 44028163


Tender

Rectangular LED track spotlight, switchable, luminaire length 587 mm, luminaire width 124 mm, height 28 mm, weight 2.140 kg, with rotationally symmetrical narrow-wide beam light distribution. PMMA cover, rated luminous flux 8,800 lm, rated wattage 1 x 63 W, warm white light color, most similar color temperature (CCT) 3,000 K, general color rendering index CRI > 80, service life L70/B50 at 25 °C: 60,000 h, service life L80/B50 at 25 °C: 50,000 h, housing material: steel / plastic, color: textured silver, permissible ambient temperature (ta): -20 °C - +25 °C, protection class (EN 61140): I, degree of protection (DIN EN 60529): IP20, degree of impact resistance according to IEC62262: IK02. With electronic control gear, switchable.

| Article data | |
|-------------------|-----------------------------|
| Article no. | 44028163 |
| GTIN | 4255752512592 |
| Series name | BALI MEGA |
| Short description | LED track spotlight, on/off |
| Material | Steel / Plastic |
| Colour | Silver |
| Type of surface | Structure |
| Shape | Rectangular |
| Length | 587 mm |
| Width | 124 mm |
| Height | 28 mm |
| Weight | 2.140 kg |
| Conformance | CE, UKCA |

BALI MEGA LED track spotlight, on/off

Article no. 44028163

| Lighting technology | |
|------------------------------|---------------|
| Colour temperature | 3.000 K |
| Light colour | White |
| Light output | Direct |
| Luminous flux | 8,800 lm |
| System efficiency | 140 lm/W |
| McAdam-Step | McAdam-Step 3 |
| Colour rendering | CRI > 80 |
| Beam angle longitudinal | 72° |
| Beam angle transverse | 53° |
| Light sharing | Symmetric |
| Adjustable color temperature | No |

| Operating technology of the luminaire | |
|---------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
| System output | 63 W |
| Voltage type | AC |
| AC nominal voltage min | 220 V |
| AC nominal voltage max | 240 V |
| Frequency max | 60 Hz |
| Frequency min | 50 Hz |
| Lamp | LED |
| Lamp holder | LED |
| Protection class | I |
| Degree of protection | IP20 |
| Dimmable | No |
| Control | on/off |
| Bulb change possible | The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person. |
| Rated life time L70/B50 at 25 °C | 60,000 h |
| Rated life time L80/B50 at 25 °C | 50.000 h |
| Energy efficiency class | nicht erforderlich |
| max. no. lights on B16 A | 33 |
| max. no. lights on C16 A | 84 |

| Mounting technology | |
|-----------------------------|-------------------------|
| Mounting method | Conductor rail mounting |
| Place of installation | Ceiling-mounted |
| Adjustability | Not adjustable |
| Rotation angle | 355° |
| Impact resistance | IK02 |
| Material cover | PMMA |
| Suitable for through-wiring | No |

| Packing data | |
|-------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Gross weight | 2.354 kg |
| Length of packaging | 895 mm |
| Packaging width | 180 mm |
| Packaging height | 185 mm |
| Disposal at end of life | <p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p> |