


BIRO40 LED pendant profile luminaire direct
Article no. 7415141032

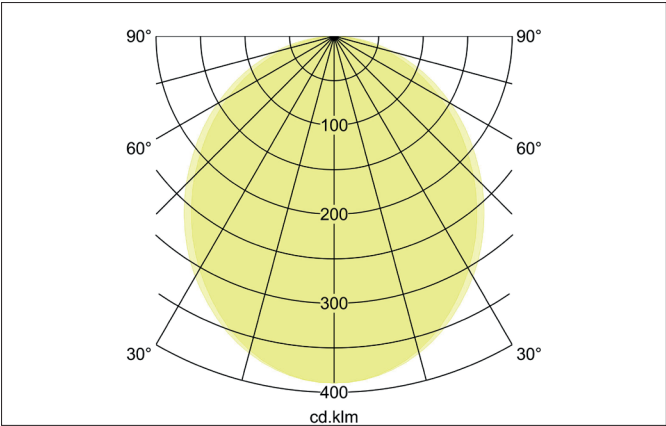

| Tender | |
|---|--|
| Rectangular LED pendant profile luminaire direct, luminaire length 2,260 mm, luminaire width mm, height 75 mm, for pendant mounting. Pendant length max. 1,500 mm Weight 3.790 kg, with rotationally symmetrical narrow-wide beam light distribution. Satin-finish plastic cover, rated luminous flux 8,130 lm, UGR < 25, rated power 57 W, neutral white light color, most similar color temperature (CCT) 4,000 K, general color rendering index CRI > 90, service life L80/B50 at 25 °C: 113,000 h, housing material: aluminium / steel / plastic, color: textured white, permissible ambient temperature (ta): -20 °C - +25 °C, protection class (EN 61140): I, degree of protection (DIN EN 60529): IP20. With electronic control gear, DALI-DT6 dimmable. | |

| Article data | |
|-------------------|--------------------------------------|
| Article no. | 7415141032 |
| GTIN | 4255752518266 |
| Series name | BIRO40 |
| Short description | LED pendant profile luminaire direct |
| Material | Aluminium / Steel / Plastic |
| Colour | White |
| Type of surface | Structure |
| Shape | Rectangular |
| Length | 2,260 mm |
| Width | |
| Height | 75 mm |
| Weight | 3.790 kg |
| Conformance | CE, UKCA |

BIRO40 LED pendant profile luminaire direct

Article no. 7415141032

| Lighting technology | |
|------------------------------|---------------|
| Colour temperature | 4.000 K |
| Light colour | White |
| Light output | Direct |
| Luminous flux | 8,130 lm |
| System efficiency | 143 lm/W |
| McAdam-Step | McAdam-Step 3 |
| Colour rendering | CRI > 90 |
| Reflector | Without |
| Glare evaluation | UGR < 25 |
| Light sharing | Symmetric |
| Adjustable color temperature | No |

| Operating technology of the luminaire | |
|---------------------------------------|--|
| System output | 57 W |
| Voltage type | AC |
| AC nominal voltage max | 230 V |
| Frequency max | 50 Hz |
| Lamp | LED |
| Lamp holder | Without fitting |
| Protection class | I |
| Degree of protection | IP20 |
| Protection class on the ceiling side | IP20 |
| Dimmable | Yes |
| Control | DALI-DT6 |
| Bulb change possible | The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person. |
| Rated life time L80/B50 at 25 °C | 113.000 h |

| Mounting technology | |
|-----------------------------|--------------------|
| Mounting method | Suspended |
| Place of installation | Ceiling-mounted |
| Adjustability | Not adjustable |
| Pendulum length min. | 500 mm |
| Pendulum length max. | 1,500 mm |
| Number of cable suspensions | 2 |
| Material cover | Plastic, satinised |

| Packing data | |
|-------------------------|--|
| Gross weight | 4.58 kg |
| Length of packaging | 2,300 mm |
| Packaging width | 160 mm |
| Packaging height | 135 mm |
| Disposal at end of life | <p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p> |