
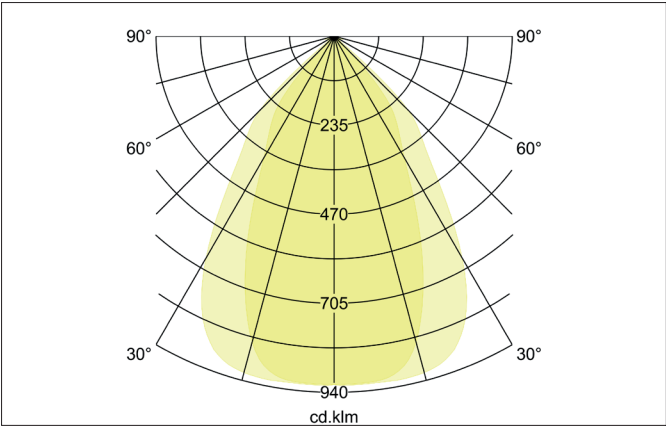


**BALI MINI-S LED track spotlight, rotatable, DALI**  
Article no. 44013164DA

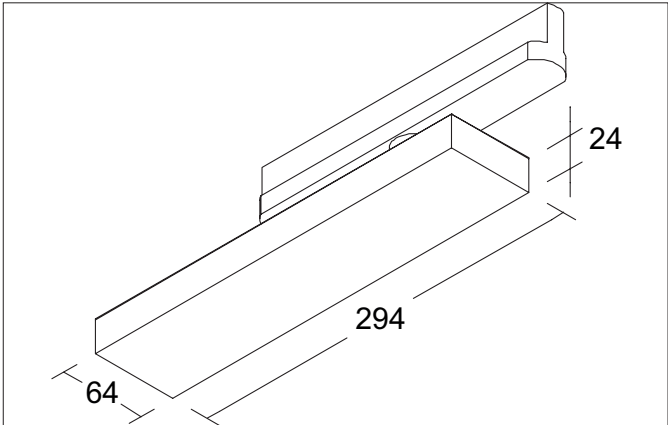

**Tender**

Rectangular LED track spotlight, rotatable and tiltable, DALI dimmable, luminaire length 294 mm, luminaire width 64 mm, height 25 mm, weight 0.690 kg, with rotationally symmetrical narrow-wide beam light distribution. PMMA cover, rated luminous flux 2,800 lm, rated wattage 1 x 20 W, neutral white light color, most similar color temperature (CCT) 4,000 K, general color rendering index CRI > 80, service life L70/B50 at 25 °C: 60,000 h, service life L80/B50 at 25 °C: 50,000 h, housing material: steel / plastic, color: textured silver, permissible ambient temperature (ta): -20 °C - +25 °C, protection class (EN 61140): II, degree of protection (DIN EN 60529): IP20, degree of impact resistance according to IEC62262: IK02. With electronic control gear, DALI-2 dimmable.

Article data	
Article no.	44013164DA
GTIN	4255752514077
Series name	BALI MINI-S
Short description	LED track spotlight, rotatable, DALI
Material	Steel / Plastic
Colour	Silver
Type of surface	Structure
Shape	Rectangular
Length	294 mm
Width	64 mm
Hight	25 mm
Weight	0.690 kg
Conformance	CE, UKCA

**BALI MINI-S LED track spotlight, rotatable, DALI**

Article no. 44013164DA

Lighting technology	
Colour temperature	4.000 K
Light colour	White
Light output	Direct
Luminous flux	2,800 lm
System efficiency	140 lm/W
McAdam-Step	McAdam-Step 3
Colour rendering	CRI > 80
Beam angle longitudinal	72°
Beam angle transverse	53°
Light sharing	Symmetric
Adjustable color temperature	No

Operating technology of the luminaire	
System output	20 W
Voltage type	AC
AC nominal voltage min	220 V
AC nominal voltage max	240 V
Frequency max	60 Hz
Frequency min	50 Hz
Lamp	LED
Lamp holder	LED
Protection class	II
Degree of protection	IP20
Dimmable	Yes
Control	DALI-2
Bulb change possible	The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person.
Rated life time L70/B50 at 25 °C	60,000 h
Rated life time L80/B50 at 25 °C	50.000 h
Energy efficiency class	nicht erforderlich
max. no. lights on B16 A	33
max. no. lights on C16 A	84

Mounting technology	
Mounting method	Conductor rail mounting
Place of installation	Ceiling-mounted
Adjustability	Rotable and pivoted
Swivel angle	45°
Rotation angle	355°
Impact resistance	IK02
Material cover	PMMA
Suitable for through-wiring	No

Packing data	
Gross weight	0.759 kg
Length of packaging	340 mm
Packaging width	170 mm
Packaging height	100 mm
Disposal at end of life	<p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p>