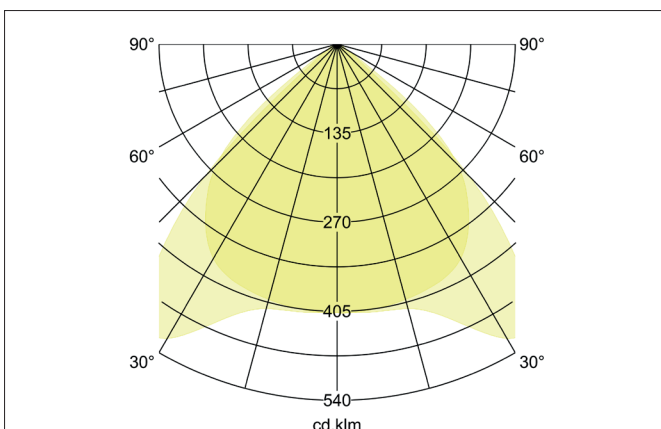


BALI MIDI LED track spotlight, rotatable, DALI
 Article no. 44019174DA

Tender

LED track spotlight, rotatable, DALI, Rectangular. Luminaire length 587.0 mm, Luminaire width 64.0 mm, Hight 25.0 mm Weight 1.12 kg, with rotationssymmetrical, deep, wide distributed light intensity. Cover PMMA. Luminous flux 6.000 lm, Power 1 x 40 W, Light colour neutral white, Correlated color temprature (CCT) 4.000 K, Colour rendering index CRI > 80, Rated life time L70/B50 at 25 °C: 60.000 h, Rated life time L80/B50 at 25 °C: 50.000 h, Housing material: Steel / Plastic, Colour: White structure, Permissible ambient temperature (ta): -20 °C - +25 °C, Protection class (EN 61140): II, Degree of protection (DIN EN 60529): IP20, shock resistance according to IEC62262: IK02 . With electronic driver, DALI-2 dimmable.

| Article data | |
|-------------------|--------------------------------------|
| Article no. | 44019174DA |
| GTIN | 4255752514824 |
| Series name | BALI MIDI |
| Short description | LED track spotlight, rotatable, DALI |
| Material | Steel / Plastic |
| Colour | White |
| Type of surface | Structure |
| Shape | Rectangular |
| Length | 587 mm |
| Width | 64 mm |
| Hight | 25 mm |
| Weight | 1.120 kg |
| Conformance | CE, UKCA |

BALI MIDI LED track spotlight, rotatable, DALI

Article no. 44019174DA

| Lighting technology | |
|------------------------------|---------------|
| Colour temperature | 4.000 K |
| Light colour | White |
| Light output | Direct |
| Luminous flux | 6,000 lm |
| System efficiency | 150 lm/W |
| McAdam-Step | McAdam-Step 3 |
| Colour rendering | CRI > 80 |
| Beam angle longitudinal | 97° |
| Beam angle transverse | 91° |
| Light sharing | Symmetric |
| Adjustable color temperature | No |

| Operating technology of the luminaire | |
|---------------------------------------|--|
| System output | 40 W |
| Voltage type | AC |
| AC nominal voltage min | 220 V |
| AC nominal voltage max | 240 V |
| Frequency max | 60 Hz |
| Frequency min | 50 Hz |
| Lamp | LED |
| Lamp holder | LED |
| Protection class | II |
| Degree of protection | IP20 |
| Dimmable | Yes |
| Control | DALI-2 |
| Bulb change possible | The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person. |
| Rated life time L70/B50 at 25 °C | 60,000 h |
| Rated life time L80/B50 at 25 °C | 50.000 h |

| Mounting technology | |
|-----------------------------|-------------------------|
| Mounting method | Conductor rail mounting |
| Place of installation | Ceiling-mounted |
| Adjustability | Rotable |
| Rotation angle | 355° |
| Impact resistance | IK02 |
| Material cover | PMMA |
| Suitable for through-wiring | No |

| Packing data | |
|-------------------------|---|
| Gross weight | 1.232 kg |
| Length of packaging | 655 mm |
| Packaging width | 180 mm |
| Packaging height | 185 mm |
| Disposal at end of life | This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately. By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment. |