
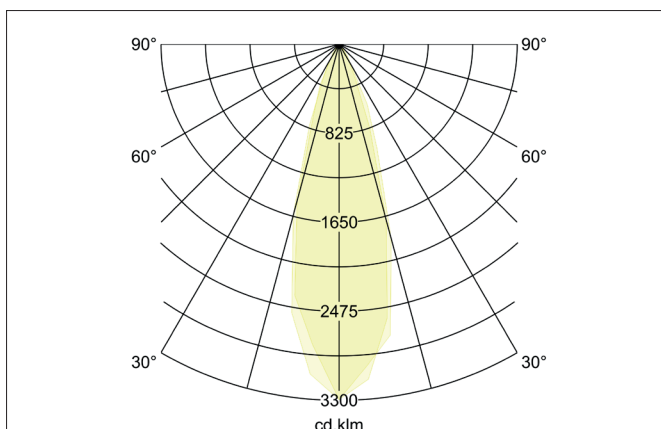
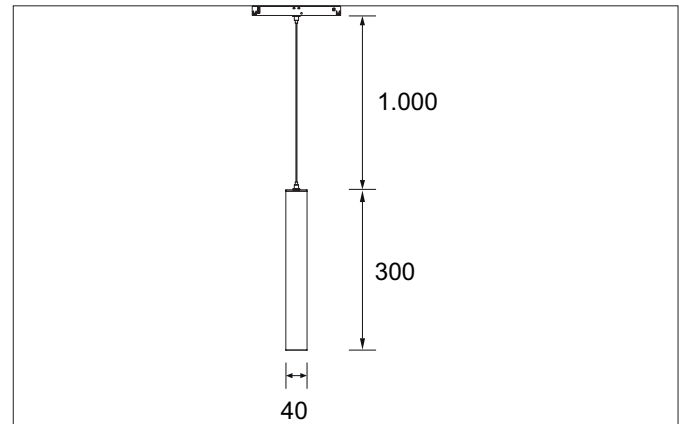


PEPA PEN LED-Schienen-Pendelleuchte 48 V DC, DALI-2 dimmbar

Article no. 43140083


Tender

Round LED track pendant luminaire 48 V DC, DALI-2 dimmable, luminaire diameter 40 mm, height 300 mm, weight 0.281 kg, white reflector with rotationally symmetrical narrow-wide beam light distribution. Transparent plastic cover, rated luminous flux 760 lm, UGR < 19, rated wattage 1 x 10 W, warm white light color, most similar color temperature (CCT) 3,000 K, general color rendering index CRI > 90, service life L70/B50 at 25 °C: 50,000 h, housing material: aluminum / polycarbonate, color: black, permissible ambient temperature (ta): 0 °C to +35 °C, protection class (EN 61140): III, degree of protection (DIN EN 60529): IP20. For connection to an external control gear, which is not included with the luminaire. DALI-2 dimmable.

Article data	
Article no.	43140083
GTIN	4255752520368
Series name	PEPA PEN
Short description	LED-Schienen-Pendelleuchte 48 V DC, DALI-2 dimmbar
Material	Aluminium / Polycarbonate
Colour	Black
Type of surface	Matt
Shape	Round
Outer diameter	40 mm
Hight	300 mm
Scope of delivery	inkl. DALI-2 Adapter
Weight	0.281 kg
Conformance	CE, UKCA

PEPA PEN LED-Schienen-Pendelleuchte 48 V DC, DALI-2 dimmbar

Article no. 43140083

Lighting technology	
Colour temperature	3.000 K
Light colour	White
Light output	Direct
Luminous flux	760 lm
System efficiency	76 lm/W
McAdam-Step	McAdam-Step 6
Colour rendering	CRI > 90
Reflector	Other
Reflector colour	white
Beam angle	24°
Glare evaluation	UGR < 19
Light sharing	Symmetric
Adjustable color temperature	No

Operating technology of the luminaire	
System output	10 W
Voltage type	DC
AC nominal voltage min	48 V
AC nominal voltage max	48 V
Current	250 mA
Lamp	LED
Lamp holder	LED
Protection class	III
Degree of protection	IP20
Ambient temperature	0°C bis +35°C
Dimmable	Yes
Control	DALI-2
Minimum / maximum dimming range	1 - 100 %
Bulb change possible	The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person.
Rated life time L70/B50 at 25 °C	50,000 h
Energy efficiency class	nicht erforderlich

Mounting technology	
Mounting method	Conductor rail mounting
Place of installation	Ceiling-/Wall-mounted
Adjustability	Not adjustable
Pendulum length max.	300 mm
Material cover	Plastic, transparent
Suitable for through-wiring	No

Packing data	
Gross weight	0.334 kg
Length of packaging	335 mm
Packaging width	65 mm
Packaging height	50 mm
Disposal at end of life	<p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p>