


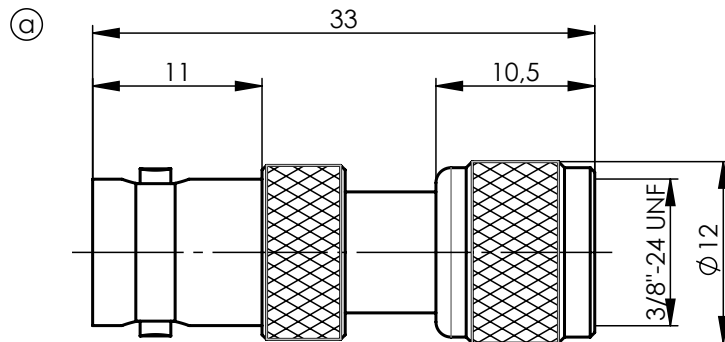

Mechanical characteristics

interface dimensions acc. to

Mechanische Eigenschaften

Steckgesicht nach

IEC 61169-8 (BNC)

Components

center conductor
outer conductor
other metal parts
insulator

Bauteile

Innenleiter
Außenleiter
sonstige Metallteile
Isolierung

Materials / Material

brass / Messing
brass / Messing
brass / Messing
POM

Finish / Oberfläche

gold plated / vergoldet
nickel plated / vernickelt
nickel plated / vernickelt

Electrical characteristics

impedance
frequency
working voltage

Elektrische Eigenschaften

Wellenwiderstand
Frequenz
Betriebsspannung

50 Ω
0-2,5 GHz
max. 335 V

Environmental

operating temp.
RoHS compliant

Umgebung

Betriebstemperatur
RoHS konform

-40°C / +60°C
2011/65/EU

Änd./ rev. index	Änderungs-Nr. / revision code	Datum/ date	Name/ name	Datum/ date	Name/ name	Gewicht/ weight [g]			
				gez./ drawn	14.11.2019	MA			
				gepr./ appr.	22.11.2019	BJ	ca./approx.		
				Maßstab/ scale	Benennung/ title			 Telegärtner	
				2:1	Adapt str BNCf - MiniUHFm Adapt str BNCf - MiniUHFm				
				untol. Maße/ dim. without tolerances according to	Unterl./doc. type	Materialnr./ material no.		 Maße/ dimensions: mm	
					CUG	100023690			
					Ersatz für/ replaces	PDM Nr./ pdm no. J01008F0072		Original : DIN A4 Blatt/ sheet 1 von/ of 1	