



HUMID ONE LED-Feuchtraum-Wannenleuchte 1.190 mm, mit 3 Std. Notlichtakku, schaltbar
Article no. 78914114

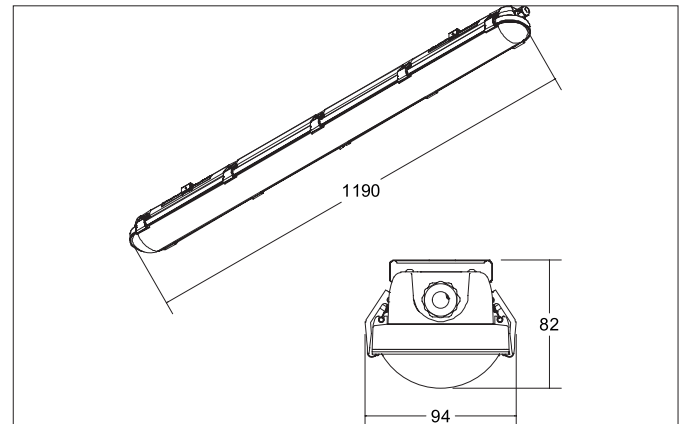

Tender

LED-Feuchtraum-Wannenleuchte 1.190 mm, mit 3 Std. Notlichtakku, schaltbar, Rectangular. Luminaire length 1190.0 mm, Luminaire width 94.0 mm, Height 82.0 mm Weight 1.835 kg, with rotationssymmetrical, deep, wide distributed light intensity. Cover polycarbonat clear. Luminous flux 2.625 lm, Power 1 x 21 W, Light colour neutral white, Correlated color temprature (CCT) 4.000 K, Colour rendering index CRI > 80, Rated life time L70/B50 at 25 °C: 50.000 h, Rated life time L80/B50 at 25 °C: 50.000 h, Housing material: Polycarbonate / Stainless steel, Colour: Gray, Permissible ambient temperature (ta): 5 °C to +40 °C, Protection class (EN 61140): I, Degree of protection (DIN EN 60529): IP65, shock resistance according to IEC62262: IK08 .With electronic driver, on/off switchable.

HUMID ONE LED-Feuchtraum-Wannenleuchte 1.190 mm, mit 3 Std. Notlichtakku, schaltbar
 Article no. 78914114

Article data	
Article no.	78914114
GTIN	4255752522942
Series name	HUMID ONE
Short description	LED-Feuchtraum-Wannenleuchte 1.190 mm, mit 3 Std. Notlichtakku, schaltbar
Material	Polycarbonate / Stainless steel
Colour	Gray
Type of surface	Matt
Shape	Rectangular
Length	1,190 mm
Width	94 mm
Hight	82 mm
Halogenfrei	Ja
Scope of delivery	<p>Lieferung: inkl. Konverter zum Anschluss an 230 V-Netzspannung, schaltbar</p> <p>Lieferung inkl. Montagezubehör-Set bestehend aus:</p> <ul style="list-style-type: none"> - 4 x Sicherungsschrauben für Cliphalter, - 2 x Sicherungsschrauben und Muttern für Universal Montagehalter, - 4 x (78012/78013 = 2 x) Montageschrauben und Dübel, - 2 x Universal Montagehalter für Wand-, Decken- oder Pendelmontage (benötigte Laschen zum Einhängen in den Montagehalter im Lieferumfang). - 1 x IP65-Kabelverschraubung PG13,5 (Kabeldurchmesser Ø 6 - 12 mm)
Weight	1.835 kg
Conformance	CE

Lighting technology	
Colour temperature	4.000 K
Light output	Direct
Luminous flux	2,625 lm
System efficiency	125 lm/W
McAdam-Step	McAdam-Step 5
Colour rendering	CRI > 80
Beam angle	117°
Light sharing	Symmetric
Adjustable color temperature	No

Operating technology of the luminaire	
System output	21 W
Voltage type	AC
AC nominal voltage min	198 V
AC nominal voltage max	264 V
Frequency max	60 Hz
Frequency min	50 Hz
Lamp	LED
Lamp holder	Without fitting
Protection class	I
Degree of protection	IP65
Ambient temperature	5 °C bis +40 °C
Dimmable	No
Control	on/off
Bulb change possible	The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person.
Glow wire test according to IEC 60695-2-12	850°C - 5s
Rated life time L70/B50 at 25 °C	50,000 h
Rated life time L80/B50 at 25 °C	50.000 h
max. no. lights on B16 A	34
max. no. lights on C16 A	54

HUMID ONE LED-Feuchtraum-Wannenleuchte 1.190 mm, mit 3
Std. Notlichtakku, schaltbar

Article no. 78914114

Operating technology of emergency light	
Battery type	LiFePO4
Function	Escape route lighting
Electric feeding	Decentralised (single battery)
Nominal operating time at BLF 100 %	3 h
Monitoring device	Automatic self-test

Operating technology of driver	
--------------------------------	--

Operating technology of driver	
AC nominal voltage min	198 V
AC nominal voltage max	264 V
Frequency min	50 Hz
Frequency max	60 Hz
Protection class	I
Degree of protection	IP65
Power	21 W
Starting current	21,7 A
Suitable for emergency lighting	Yes
Ambient temperature	5 °C bis +40 °C
max. no. lights on B16 A	34
max. no. lights on C16 A	54
Control	on/off
Connection type-primary	Connection box
Number of poles	3
Flicker-free	Yes
Switching cycles	50000
Output current	200 mA

Mounting technology	
Mounting method	Surface mounting
Place of installation	Ceiling-/Wall-/Pendant-mounted
Adjustability	Not adjustable
Impact resistance	IK08
Material cover	Polycarbonat clear
Circlip	Without circlip
Suitable for through-wiring	Yes, with optional accessories

Packing data	
Gross weight	1.943 kg
Length of packaging	1,200 mm
Packaging width	103 mm
Packaging height	83 mm
Disposal at end of life	<p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p>

**HUMID ONE LED-Feuchtraum-Wannenleuchte 1.190 mm, mit 3
Std. Notlichtakku, schaltbar**
Article no. 78914114

Optional accessories

Article no.: 81011120

Durchgangsverdrahtung, 3-polig, Länge 1.190 mm, zu 78012 / 78014

Dimensions: 1,190 mm

https://www.brumberg.com/fileadmin/products/Datenblatt_81011120_2021_DE.pdf

Article no.: 81011050

Montagezubehör Set für HUMID ONE, für Breite: 94 mm

https://www.brumberg.com/fileadmin/products/Datenblatt_81011050_2021_DE.pdf