





**ADARA LED pendant light, 1195x195, transparent**  
Article no. 49230073DA

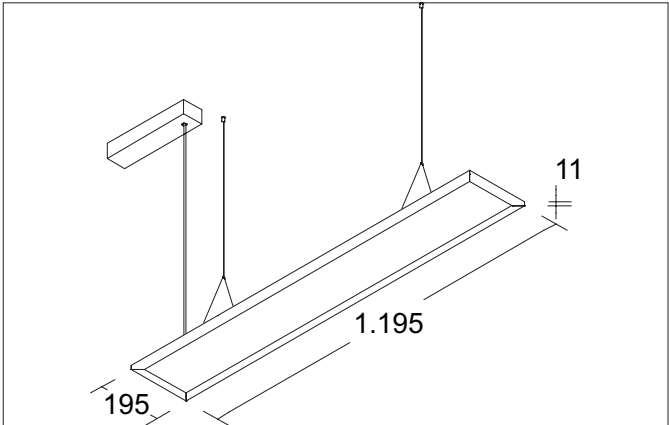

Tender	
LED pendant luminaire, 1195x195, transparent, luminaire length 1,195 mm, luminaire width 195 mm, height 12.5 mm, weight 3.3 kg, with rotationally symmetrical narrow-wide beam light distribution. Transparent plastic cover, rated luminous flux 4,750 lm, UGR < 19, rated wattage 1 x 33.5 W, light color warm white to neutral white, most similar color temperature (CCT) 3,000 - 4,000 K, general color rendering index CRI > 80, service life L70/B10 at 25 °C: 110.000 h, service life L70/B50 at 25 °C: 125,000 h, service life L80/B10 at 25 °C: 78,000 h, service life L80/B50 at 25 °C: 100,000 h, housing material: aluminum / PMMA, color: white matt, permissible ambient temperature (ta): -20 °C - +25 °C, protection class (EN 61140): I, degree of protection (DIN EN 60529): IP20, degree of impact resistance according to IEC62262: IK03. For connection to an external control gear, which is not included with the luminaire. DALI-2, DALI-DT6 dimmable.	

Article data	
Article no.	49230073DA
GTIN	4255752525790
Series name	ADARA
Short description	LED pendant light, 1195x195, transparent
Material	Aluminium / PMMA
Colour	white matt
Shape	Square
Length	1,195 mm
Width	195 mm
Hight	12.5 mm
Weight	3.3 kg
Conformance	CE, UKCA


**ADARA LED pendant light, 1195x195, transparent**

Article no. 49230073DA

Lighting technology	
Colour temperature	3.000 K / 4.000 K
Light colour	white
Color Temperature 1	3,000 K
Color Temperature 2	4,000 K
Light output	Direct/Indirect
Luminous flux	4,750 lm
Luminous flux 1	4,550 lm
Luminous flux 2	4,750 lm
Luminous flux in emergency lighting mode	390 lm
System efficiency	125 lm/W
McAdam-Step	McAdam-Step 3
Colour rendering	CRI > 80
Reflector	Without
Beam angle	85°
Glare evaluation	UGR < 19
Light sharing	Symmetric
Photobio. Risk group according to EN 62778	RG0
Adjustable color temperature	Stages

Operating technology of the luminaire	
System output	38 W
Voltage type	AC/DC
AC nominal voltage min	198 V
AC nominal voltage max	264 V
DC nominal voltage min	198 V
DC nominal voltage max	264 V
Frequency max	60 Hz
Frequency min	50 Hz
Lamp	LED exchangeable
Lamp holder	Without fitting
Protection class	I
Degree of protection	IP20
Dimmable	Yes
Control	DALI-2 , DALI-DT6
Bulb change possible	The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person.
Glow wire test according to IEC 60695-2-12	650°C
Rated life time L70/B50 at 25 °C	125,000 h
Rated life time L80/B10 at 25 °C	78.000 h
Rated life time L80/B50 at 25 °C	100.000 h
Rated life time L90/B10 at 25 °C	30.000 h
Energy efficiency class	nicht erforderlich
max. no. lights on B16 A	73
max. no. lights on C10 A	46
max. no. lights on C16 A	73

Mounting technology	
Mounting method	Suspended
Place of installation	Ceiling-mounted
Adjustability	Not adjustable
Impact resistance	IK03
Pendulum length max.	1,500 mm
Material cover	Plastic, transparent
Suitable for through-wiring	Yes



**ADARA LED pendant light, 1195x195, transparent**  
Article no. 49230073DA

Packing data	
Gross weight	3.9 kg
Length of packaging	1,245 mm
Packaging width	240 mm
Packaging hight	40 mm
Disposal at end of life	<p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p>