

2001..., 2002...

Schraubenlose Verbindungsklemmen

Art.-Nr. 2001/1.5/...

Art.-Nr. 2001/2.5/...

Art.-Nr. 2002/2.5/...


Push-Nuts

Art.-No. 2001/1.5/...


Art.-No. 2001/2.5/...

Art.-No. 2002/2.5/...

To be sold only with installation instructions



Art.-Nr. 2001/1.5/...
Art.-Nr. 2001/2.5/...
Art.-No. 2001/1.5/...
Art.-No. 2001/2.5/...



Art.-Nr. 2002/2.5/...
Art.-No. 2002/2.5/...

1.
Leiter abisolieren
Strip wire


Leiter
wire

A



Art.-Nr.	Abisolierlänge (A)
Art.-No.	Strip length (A)
2001/1.5/ ...	10 mm
2001/2.5/ ...	11 mm
2002/2.5/ ...	9 mm


2.
Leiter in das Gehäuse einstecken
Push wire into contact




2001/1.5/...
2001/2.5/...
2002/2.5/...

Leiter
wire

3.
Test
Test

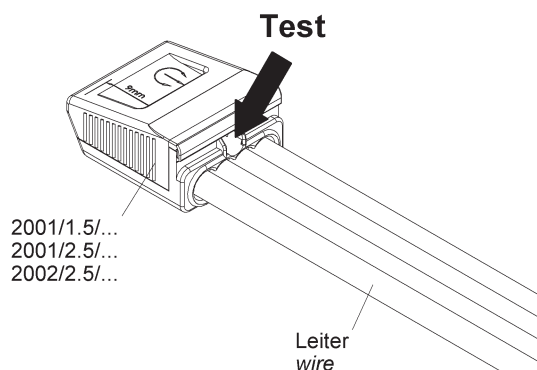

4.
Lösen: gleichzeitig drehen und ziehen
Re-wire: Twist and pull simultaneously

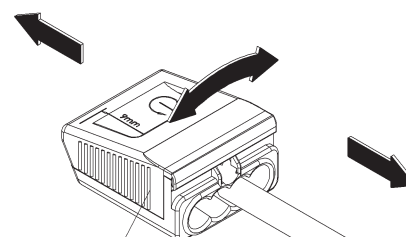

2001/1.5/...
2001/2.5/...
2002/2.5/...

Leiter
wire