

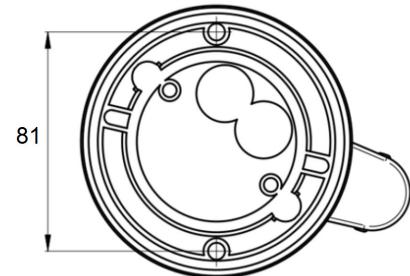


Bewegungs- und Tageslichtsensor für große Höhen, mit CASAMBI-Lichtsteuerung

Motion and Daylight Sensor for High Placing, with CASAMBI Lighting Control

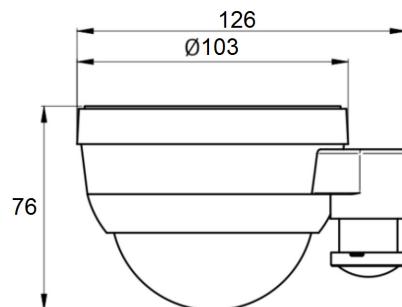

I	L	B
5 m	26 m	18 m
6 m	26 m	18 m
7 m	28 m	18 m
8 m	28 m	19 m
9..16 m	30 m	19 m

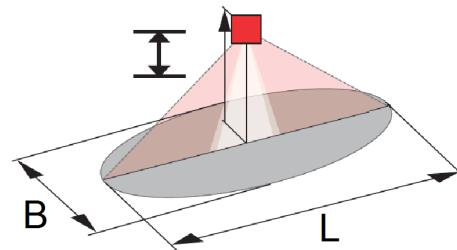

Artikelnummer	Part no.	ohne DALI without DALI	mit DALI with DALI
Typ	Type	808580	SHMLDBT230W
Versorgungsspannung	Supply voltage	230 Vac, 50 Hz	
Funksignal	Radio signal	2,402..2,483 GHz; 8 dBm	
Signalausgang	Signal output	Casambi	Casambi, DALI-2
Umgebungstemperatur (ta)	Ambient temperature (ta)	-5..+45 °C	
Schutzart	Degree of protection	IP54	
Abmessungen	Dimensions	126 x 123 x 76 mm	

- Bewegungs- und Tageslichtsensor für Netzspannung zum Steuern von Geräten in CASAMBI-Netzwerken
- Mit der CASAMBI-App konfigurierbar und vielseitig nutzbar
- Montagehöhe 5..16 m;
Erfassungsbereich horizontal 360° oval 30..19 m;
daher besonders geeignet für große Höhen z.B. in Hallen
- Erfassungsbereich kann durch Blenden eingeschränkt werden
- Nachlaufzeit: 1 s .. 60 min, Helligkeitssollwert: 1..4000 lux

- Motion and daylight sensor for mains voltage to control devices in CASAMBI networks
- Configurable with the CASAMBI app and usable in many ways
- Mounting height 5..16 m; detection range horizontal 360° oval 30..19 m; therefore particularly suitable for high mounting, e.g. in halls
- Detection range can be limited by blinds
- Follow-up time: 1 s .. 60 min, brightness setpoint: 1..4000 lux