



COB LED-Band 15 W/m

COB LED strip 15 W/m

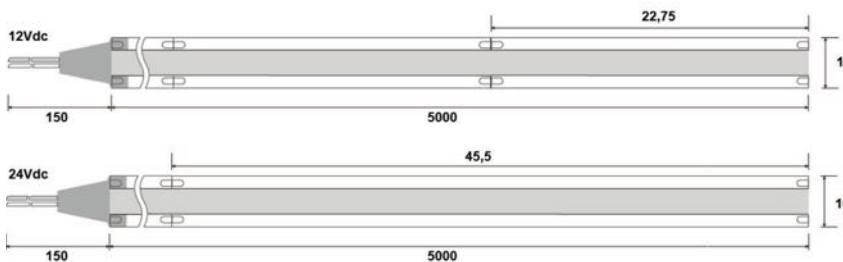

CE

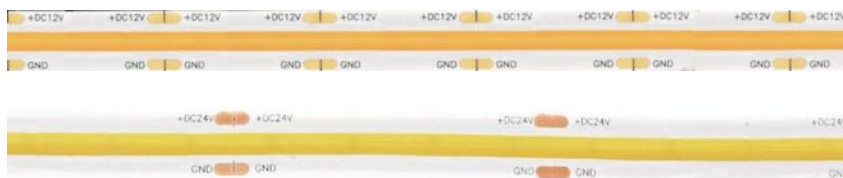

		kaltweiß cool white	neutraweiß neutral white	warmweiß warm white	extrawarm extra warm
Artikelnummer 12 Vdc	Part no. 12 Vdc	808110	808111	808112	808113
Typ	Type	OSC12-15-965	OSC12-15-940	OSC12-15-930	OSC12-15-927
Artikelnummer 24 Vdc	Part no. 24 Vdc	808115	808116	808117	808118
Typ	Type	OSC24-15-965	OSC24-15-940	OSC24-15-930	OSC24-15-927
Leistung max.	Power max.	15 W/m			
Lichtstrom typ:	Luminous flux typ:	1380 lm/m	1360 lm/m	1340 lm/m	1330 lm/m
Farbtemperatur	Colour temperature	6100 K	3900 K	2900 K	2700 K
Farbwiedergabeindex	Colour rendering index	90	90	91	91
Ausstrahlwinkel	Viewing angle	150 °			
Max. Bemessungstemperatur (ts)	Rated max. temperature (ts)	50 °C			
AbmessungEN	Dimensions	5000 x 10 x 2 mm			
Anzahl LEDs	Number of LEDs	528 /m			
Nenn-Eingangsspannung	Nominal input voltage	12 Vdc / 24 Vdc			
Länge einer Einheit	Length of a unit	22,75 mm / 45,5 mm			
Max. Länge nach Einspeisung	Max. length after feed-in	2 m / 4 m			

- 5 m flexibles COB LED-Band mit SMD-LEDs
- Selbstklebend (zusätzliche Befestigung wird empfohlen)
- Trennbar zwischen den Einheiten, mit Löt pads
- Muss zur Kühlung auf wärmeleitender Oberfläche montiert werden
- Bei Montage auf elektrisch leitendem Material bei den Anschlüssen auf Isolierung achten
- Biegeradius min. 50 mm; ohne Druck ankleben
- Mit 15 cm Anschlussleitung

- 5 m flexible COB LED Strip with SMD-LEDs
- Self-adhesive (additional fixture is recommended)
- Divisible between units, with solder pads
- Must be installed on a heat-conducting surface for cooling purposes
- If installed onto a surface that conducts electricity, please ensure that the connections are insulated
- Bending radius min. 50 mm; attach without pressure
- With 15 cm connection cable