
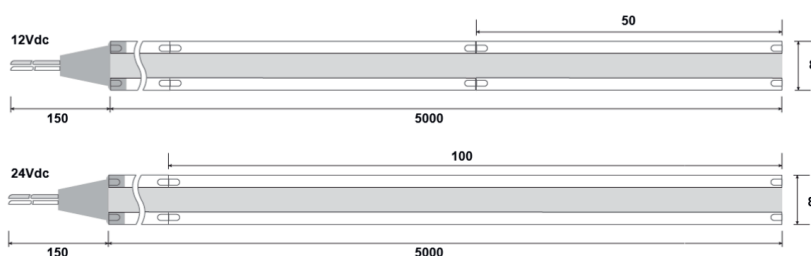


COB LED-Band 9 W/m

COB LED strip 9 W/m

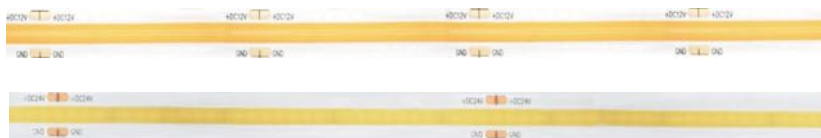

CE

					
		kaltweiß cool white	neutralweiß neutral white	warmweiß warm white	extrawarm extra warm
Artikelnummer 12 Vdc	Part no. 12 Vdc	808100	808101	808102	808103
Typ	Type	OSC12-9-965	OSC12-9-940	OSC12-9-930	OSC12-9-927
Artikelnummer 24 Vdc	Part no. 24 Vdc	808105	808106	808107	808108
Typ	Type	OSC24-9-965	OSC24-9-940	OSC24-9-930	OSC24-9-927
Leistung max.	Power max.	9 W/m			
Lichtstrom typ.	Luminous flux typ.	680 lm/m	670 lm/m	660 lm/m	650 lm/m
Farbtemperatur	Colour temperature	6100 K	3900 K	2900 K	2700 K
Farbwiedergabeindex	Colour rendering index	90	90	91	91
Ausstrahlwinkel	Viewing angle	150 °			
Max. Bemessungstemperatur (ts)	Rated max. temperature (ts)	50 °C			
Abmessungen	Dimensions	5000 x 8 x 2 mm			
Anzahl LEDs	Number of LEDs	320 /m			
Nenn-Eingangsspannung	Nominal input voltage	12 Vdc / 24 Vdc			
Länge einer Einheit	Length of a unit	50 mm / 100 mm			
Max. Länge nach Einspeisung	Max. length after feed-in	2,5 m / 5 m			

- 5 m flexibles COB LED-Band mit SMD-LEDs
- Selbstklebend (zusätzliche Befestigung wird empfohlen)
- Trennbar zwischen den Einheiten, mit Löt pads
- Muss zur Kühlung auf wärmeleitender Oberfläche montiert werden
- Bei Montage auf elektrisch leitendem Material bei den Anschlüssen auf Isolierung achten
- Biegeradius min. 50 mm; ohne Druck ankleben
- Mit 15 cm Anschlussleitung

- 5 m flexible COB LED strip with SMD-LEDs
- Self-adhesive (additional fixture is recommended)
- Divisible between units, with solder pads
- Must be installed on a heat-conducting surface for cooling purposes
- If installed onto a surface that conducts electricity, please ensure that the connections are insulated
- Bending radius min. 50 mm; attach without pressure
- With 15 cm connection cable