


## LED-Band 9,6 W/m mit 2216-LEDs, mit IP-Schutz

*LED strip 9,6 W/m with 2216-LEDs, with IP protection*

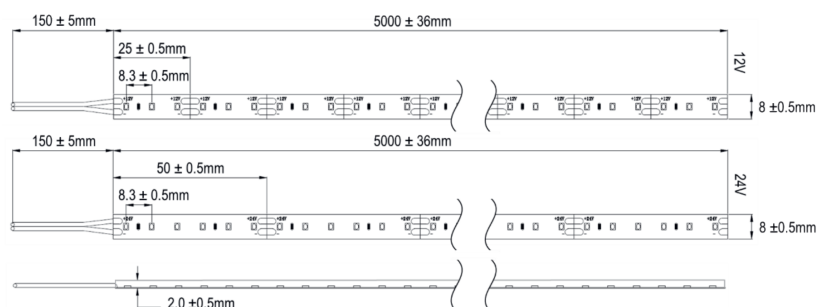

IP63 **CE**

|                                |                             | kaltweiß<br>cool white | neutralweiß<br>neutral white | warmweiß<br>warm white | extrawarm<br>extra warm |
|--------------------------------|-----------------------------|------------------------|------------------------------|------------------------|-------------------------|
| <b>Artikelnummer 12 Vdc</b>    | <b>Part no. 12 Vdc</b>      | <b>808290</b>          | <b>808291</b>                | <b>808292</b>          | <b>808293</b>           |
| Typ 12 Vdc                     | Type 12 Vdc                 | OSI12-10-965           | OSI12-10-940                 | OSI12-10-930           | OSI12-10-927            |
| <b>Artikelnummer 24 Vdc</b>    | <b>Part no. 24 Vdc</b>      | <b>808295</b>          | <b>808296</b>                | <b>808297</b>          | <b>808298</b>           |
| Typ 24 Vdc                     | Type 24 Vdc                 | OSI24-10-965           | OSI24-10-940                 | OSI24-10-930           | OSI24-10-927            |
| Leistung max.                  | Power max.                  | 9,6 W/m                |                              |                        |                         |
| Lichtstrom typ.                | Luminous flux typ.          | 770 lm/m               | 740 lm/m                     | 718 lm/m               | 708 lm/m                |
| Farbtemperatur                 | Colour temperature          | 7300 K                 | 4300 K                       | 3300 K                 | 2800 K                  |
| Farbwiedergabeindex            | Colour rendering index      | 92                     | 91                           | 91                     | 92                      |
| Ausstrahlwinkel                | Viewing angle               | 130 °                  |                              |                        |                         |
| Max. Bemessungstemperatur (ts) | Rated max. temperature (ts) | 60 °C                  |                              |                        |                         |
| Schutzart                      | Degree of protection        | IP63                   |                              |                        |                         |
| Abmessungen                    | Dimensions                  | 5000 x 8 x 2 mm        |                              |                        |                         |
| Anzahl LEDs                    | Number of LEDs              | 120 /m                 |                              |                        |                         |
| Nenn-Eingangsspannung          | Nominal input voltage       | 12 Vdc / 24 Vdc        |                              |                        |                         |
| Länge einer Einheit            | Length of a unit            | 25 mm / 50 mm          |                              |                        |                         |
| Max. Länge nach Einspeisung    | Max. length after feed-in   | 3 m / 6 m              |                              |                        |                         |

- 5 m flexibles LED-Band mit SMD-LEDs
- Selbstklebend (zusätzliche Befestigung wird empfohlen)
- Trennbar zwischen den Einheiten, mit Löt pads
- Muss zur Kühlung auf wärmeleitender Oberfläche montiert werden
- Bei Montage auf elektrisch leitendem Material bei den Anschlüssen auf Isolierung achten
- Biegeradius an Stellen mit Bauteilen min. 50 mm; ohne Druck ankleben
- Mit 15 cm Anschlussleitung

- 5 m flexible LED strip with SMD LEDs
- Self-adhesive (additional fixture is recommended)
- Divisible between units, with solder pads
- Must be installed on a heat-conducting surface for cooling purposes
- If installed onto a surface that conducts electricity, please ensure that the connections are insulated
- Bending radius in places with components min. 50 mm; attach without pressure
- With 15 cm connection cable