


## LED-Band 7,2 W/m mit 3528-LEDs verdrehbar

*LED strip 7,2 W/m with 3528-LEDs twistable*



CE

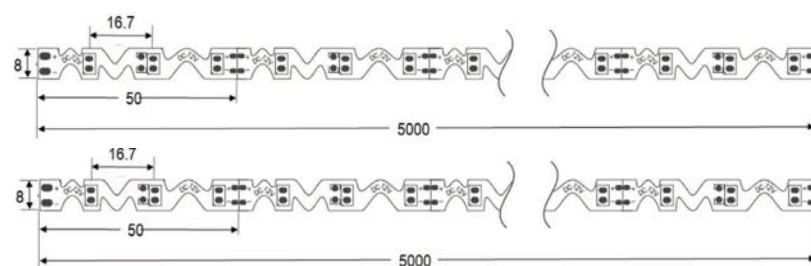

|                                |                             | kaltweiß<br>cool white | neutralweiß<br>neutral white | warmweiß<br>warm white | extrawarm<br>extra warm |
|--------------------------------|-----------------------------|------------------------|------------------------------|------------------------|-------------------------|
| <b>Artikelnummer 12 Vdc</b>    | <b>Part no. 12 Vdc</b>      | <b>800860</b>          | <b>800861</b>                | <b>800862</b>          | <b>800863</b>           |
| Typ 12 Vdc                     | Type 12 Vdc                 | OSZ12-7-965            | OSZ12-7-945                  | OSZ12-7-930            | OSZ12-7-927             |
| <b>Artikelnummer 24 Vdc</b>    | <b>Part no. 24 Vdc</b>      | <b>800865</b>          | <b>800866</b>                | <b>800867</b>          | <b>800868</b>           |
| Typ 24 Vdc                     | Type 24 Vdc                 | OSZ24-7-965            | OSZ24-7-945                  | OSZ24-7-930            | OSZ24-7-927             |
| Leistung max.                  | Power max.                  | 7,2 W/m                |                              |                        |                         |
| Lichtstrom typ                 | Luminous flux typ           | 620 lm/m               | 610 lm/m                     | 570 lm/m               | 540 lm/m                |
| Farbtemperatur                 | Colour temperature          | 5900 K                 | 4100 K                       | 3100 K                 | 2600 K                  |
| Farbwiedergabeindex            | Colour rendering index      | 93                     | 93                           | 92                     | 92                      |
| Ausstrahlwinkel                | Viewing angle               | 120 °                  |                              |                        |                         |
| Max. Bemessungstemperatur (ts) | Rated max. temperature (ts) | 60 °C                  |                              |                        |                         |
| Abmessungen                    | Dimensions                  | 5000 x 8 x 2 mm        |                              |                        |                         |
| Anzahl LEDs                    | Number of LEDs              | 60 /m                  |                              |                        |                         |
| Nenn-Eingangsspannung          | Nominal input voltage       | 12 Vdc / 24 Vdc        |                              |                        |                         |
| Länge einer Einheit            | Length of a unit            | 50 mm / 100 mm         |                              |                        |                         |
| Max. Länge nach Einspeisung    | Max. length after feed-in   | 2 m / 4 m              |                              |                        |                         |

- 5 m flexibles LED-Band mit SMD-LEDs
- Verdrehbar und seitlich faltbar für jegliche Konturen
- Selbstklebend
- Trennbar zwischen den Einheiten, mit Löt pads
- Muss zur Kühlung auf wärmeleitender Oberfläche montiert werden
- Bei Montage auf elektrisch leitendem Material bei den Anschlüssen auf Isolierung achten
- Biegeradius an Stellen mit Bauteilen min. 50 mm; ohne Druck ankleben
- Mit 15 cm Anschlussleitung

- 5 m flexible LED strip with SMD-LEDs
- Twistable and sideways foldable for any outlines
- Self-adhesive
- Divisible between units, with solder pads
- Must be installed on a heat-conducting surface for cooling purposes
- If installed onto a surface that conducts electricity, please ensure that the connections are insulated
- Bending radius in places with components min. 50 mm; attach without pressure
- With 15 cm connection cable