


LED-Netzgerät mit Konstantspannung 30..80 W, unabhängig, dimmbar

LED power supply with constant voltage 30..80 W, independent, dimmable

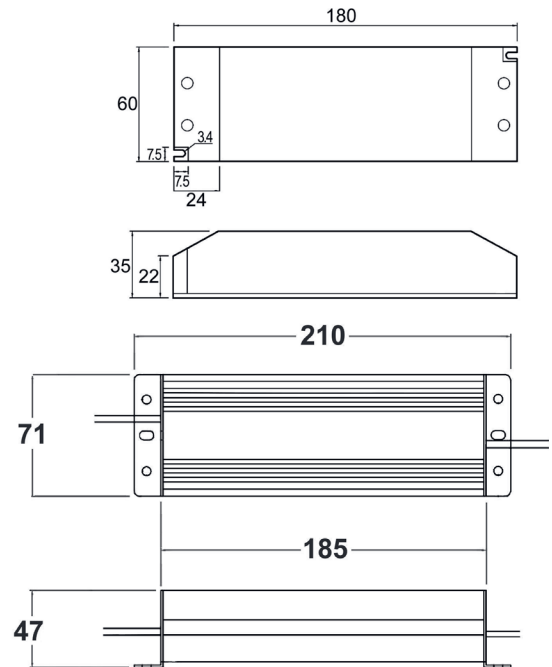

CE SELV IP20     IP65 

		CV: 12 Vdc 30 W	CV: 24 Vdc 30 W	CV: 24 Vdc 45 W	CV: 24 Vdc 60 W	CV: 24 Vdc 80 W
Artikelnummer	Part no.	800590	800592	800593	800595	800597
Typ	Type	NUDI12-30	NUDI24-30	NUDI24-45	NIDI24-60	NIDI24-80
Eingangsspannung	Input voltage	220..240 Vac				
Frequenz	Frequency	50..60 Hz				
Ausgangsleistung	Output power	18..30 W		27.45 W	36..60 W	48..80 W
Nenn-Ausgangsspannung	Nominal output current	12 Vdc		24 Vdc		
Leistungsfaktor λ	Power factor λ		0,95		0,94	
Umgebungstemperatur (ta)	Ambient temperature (ta)		-20..+50 °C		-25..+40 °C	
Max. Bemessungstemp. (tc)	Rated max. temperature (tc)		90 °C		70 °C	
Überhitzungsschutz	Thermal protection				✓	
Kurzschlusschutz	Short circuit protection		✓			
Schutzart	Degree of protection		IP20		IP65	
Abmessungen	Dimensions	180 x 60 x 35 mm			210 x 71 x 47 mm	

- Unabhängiges LED-Netzgerät mit konstanter Ausgangsspannung
- Dimmbar durch externen Phasen- oder -abschnittsdimmer
- Die Mindestlast des Dimmers darf nicht unterschritten werden
- Im Dimmbetrieb kann ein Summgeräusch auftreten, besonders mit Phasenabschnittsdimmern
- Bei geringerer LED-Last ist der Dimmbereich kleiner
- Nicht im Sekundärstromkreis schalten!
- LEDs parallel anschließen

- Independent LED power supply with constant output voltage
- Dimmable by external dimmers with leading or trailing edge
- The load must not fall below the minimum load of the dimmer
- During dimming operation a noise can occur, especially with leading edge dimmers
- With lower LED load the dimming range is smaller
- Do not insert switches into the secondary circuit!
- Only connect LEDs in parallel