

# DAMP PROOF FIT IP65










LEDVANCE









	EAN	l x w x h [mm]	W*	V <sub>AC</sub>	Hz	lm*	lm/W*	K*
DP FIT 600 V 15W ML 8405065 IP65	4099854725647	600x78x68	15	220-240	0/50/60	2250	150	4000
DP FIT 1200 V 31W ML 8405065 IP65	4099854725623	1200x78x68	31	220-240	0/50/60	4700	152	4000
DP FIT 1500 V 51W ML 8405065 IP65	4099854725609	1500x78x68	39 (max. 51)	220-240	0/50/60	6000	154	4000



	EAN	IP	IK	∠	R <sub>a</sub>	Temp (°C)	PF	⚖️
DP FIT 600 V 15W ML 8405065 IP65	4099854725647	65	08	115°	> 80	-20...+40	> 0.9	0.6 kg
DP FIT 1200 V 31W ML 8405065 IP65	4099854725623	65	08	115°	> 80	-20...+40	> 0.9	1.1 kg
DP FIT 1500 V 51W ML 8405065 IP65	4099854725609	65	08	115°	> 80	-20...+40	> 0.9	1.3 kg

# DAMP PROOF FIT IP65

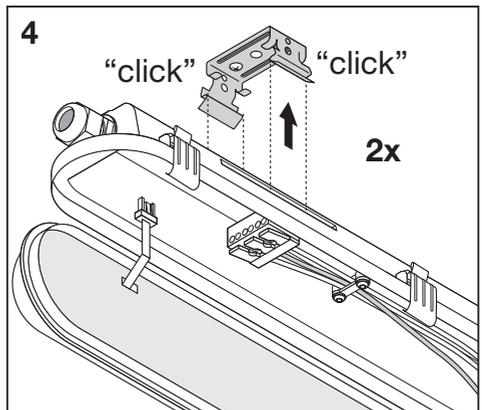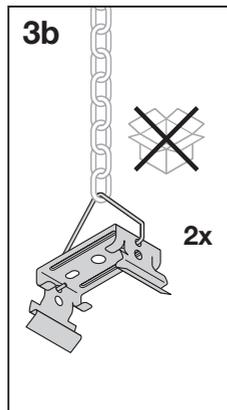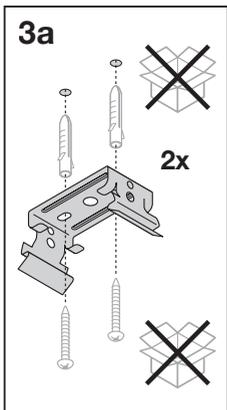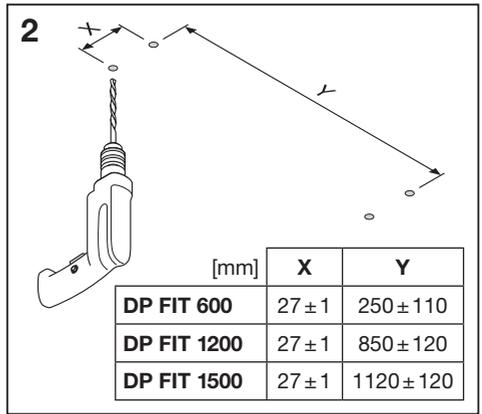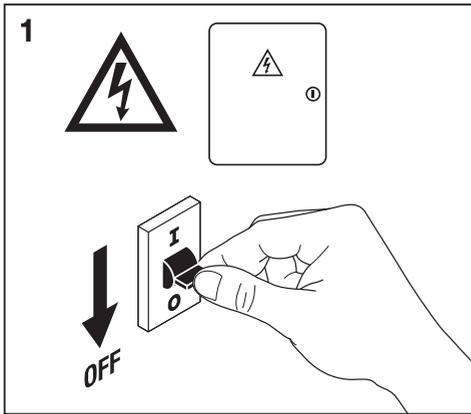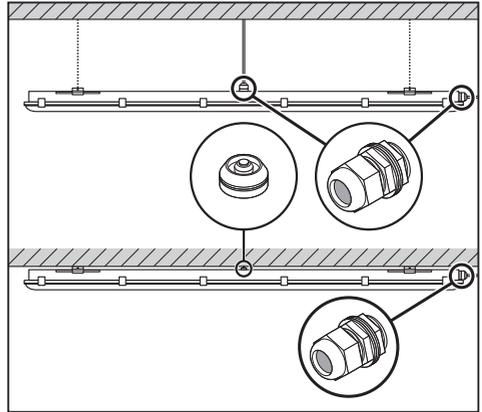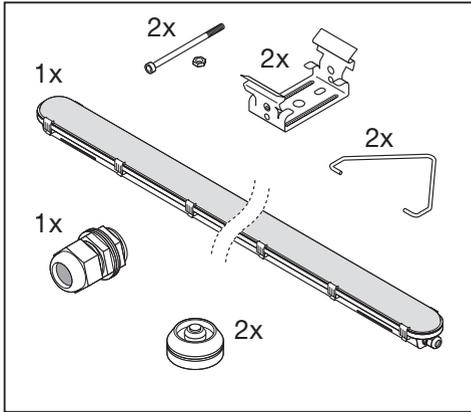

# DAMP PROOF FIT IP65

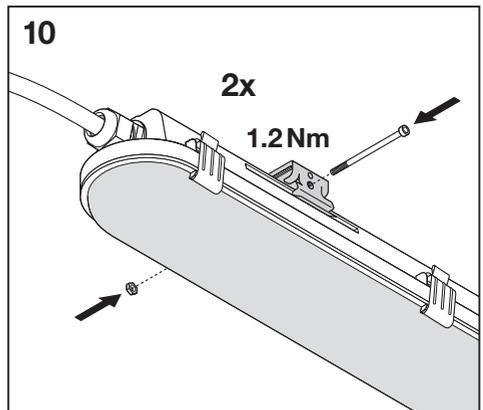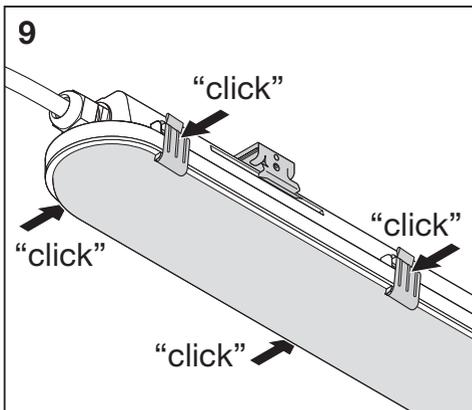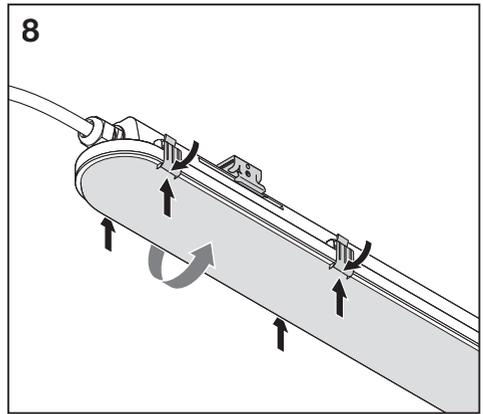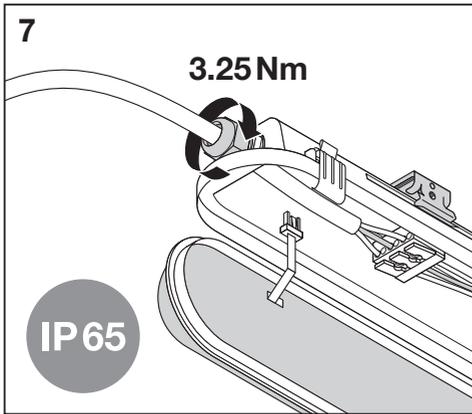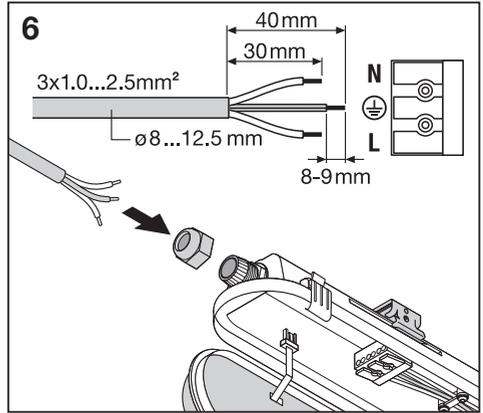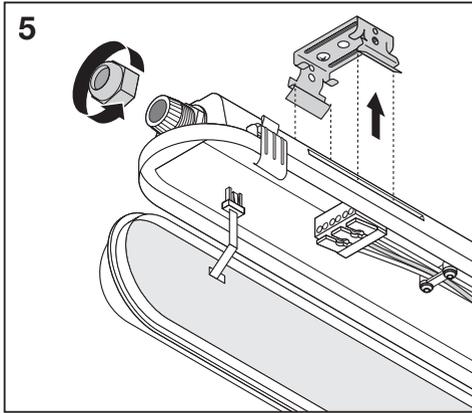

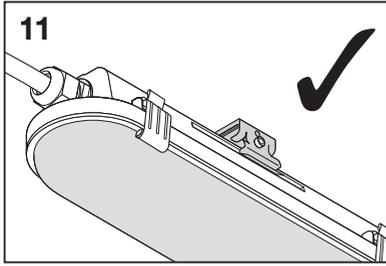

n	B16	C10	C16	Th (us)	Inrush Current peak (A)
DP FIT 600 15W	53	42	68	165	9.50
DP FIT 1200 31W	27	24	38	215	12.50
DP FIT 1500 51W	18	18	29	268	12.42



\*

	PIN	W	K	lm	lm/W	Input current driver [mA]	Output current [mA]
<b>DP FIT 600 V 15W ML 8405065 IP65</b>  <b>PRI</b> <b>SEC</b>	 1	9	4000	1350	150	45	45
			5000	1440	160		
			6500	1350	150		
<b>DP FIT 1200 V 31W ML 8405065 IP65</b>  <b>PRI</b> <b>SEC</b>	 1	15	4000	2250	150	65	75
			5000	2400	160		
			6500	2250	150		
<b>DP FIT 1200 V 31W ML 8405065 IP65</b>  <b>PRI</b> <b>SEC</b>	 1	18	4000	2800	156	80	85
			5000	2880	160		
			6500	2800	156		
<b>DP FIT 1500 V 51W ML 8405065 IP65</b>  <b>PRI</b> <b>SEC</b>	 1	31	4000	4700	152	135	150
			5000	4960	160		
			6500	4700	152		
<b>DP FIT 1500 V 51W ML 8405065 IP65</b>  <b>PRI</b> <b>SEC</b>	 1 2 3	27	4000	4200	156	120	120
			5000	4300	159		
			6500	4200	156		
<b>DP FIT 1500 V 51W ML 8405065 IP65</b>  <b>PRI</b> <b>SEC</b>	 1 2 3	31	4000	4800	155	135	135
			5000	5000	161		
			6500	4800	155		
<b>DP FIT 1500 V 51W ML 8405065 IP65</b>  <b>PRI</b> <b>SEC</b>	 1 2 3	39	4000	6000	154	175	175
			5000	6200	159		
			6500	6000	154		
<b>DP FIT 1500 V 51W ML 8405065 IP65</b>  <b>PRI</b> <b>SEC</b>	 1 2 3	51	4000	7700	151	230	230
			5000	8000	157		
			6500	7700	151		



LEDVANCE SASU  
 CQM, 5 rue d'Altorf  
 67120 Molsheim France  
[www.ledvance.com](http://www.ledvance.com)



C10449057  
 G11256095  
 10.12.25

© LEDVANCE Ltd, Sterling House,  
 810 Mandarin Court, Warrington,  
 Cheshire, WA1 1GG, United Kingdom