

Keystone Patch panel, unloaded

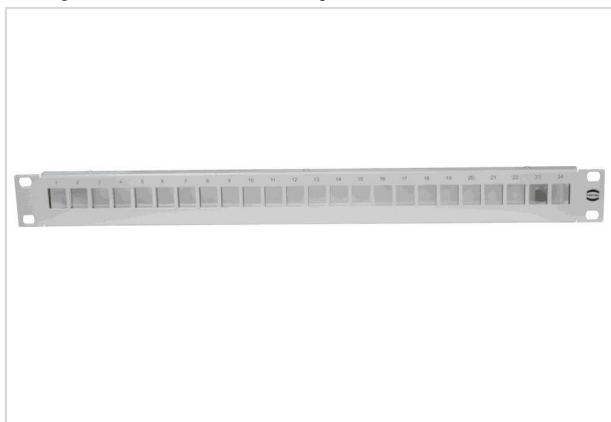


Image is for illustration purposes only. Please refer to product description.

| | |
|--------------------|---|
| Part number | 20 82 400 0002 |
| Specification | Keystone Patch panel, unloaded |
| HARTING eCatalogue | https://harting.com/20824000002 |

Identification

| | |
|---------------|-------------|
| Category | Connectors |
| Series | preLink® |
| Element | Patch panel |
| Specification | Empty |

Version

| | |
|--------|---|
| Size | Keystone version |
| Fixing | In 19" racks acc. to IEC/DIN EN 60 297-3-100 (DIN 41 494-1) |

Technical characteristics

| | |
|--|---|
| Transmission characteristics | Cat. 6 Class E up to 250 MHz |
| Data rate | 10 Gbit/s |
| Limiting temperature | -40 ... +85 °C |
| Degree of protection acc. to IEC 60529 | IP20 |
| Vibration resistance | 5.72 m/s ² acc. to IEC 61373 Category 1 Class B |
| Shock resistance | 5 g / 30 ms, 5 shocks / axis and direction acc. to IEC 61373 Category 1 Class B |

Material properties

| | |
|-----------------------------|---------------|
| Material (insert) | Steel sheet |
| RoHS | compliant |
| ELV status | compliant |
| China RoHS | e |
| REACH Annex XVII substances | Not contained |



Pushing Performance
Since 1945

Material properties

| | |
|----------------------------|---------------|
| REACH ANNEX XIV substances | Not contained |
| REACH SVHC substances | Not contained |

Specifications and approvals

| | |
|----------------|------------|
| Specifications | EN 45545-2 |
| Approvals | DNV GL |
| PROFINET | Yes |

Commercial data

| | |
|--------------------------------|--|
| Packaging size | 1 |
| Net weight | 950 g |
| Country of origin | Czechia |
| European customs tariff number | 85389099 |
| GTIN | 5713140135710 |
| eCl@ss | 27440292 Connector component (accessories) |
| ETIM | EC002943 |
| UNSPSC 24.0 | 39121400 |