





**OLENI-S Recessed LED spotlight, integrated converter (DOB), trailing edge dimmable, dim2warm, with connection box**  
Article no. 12648153DW

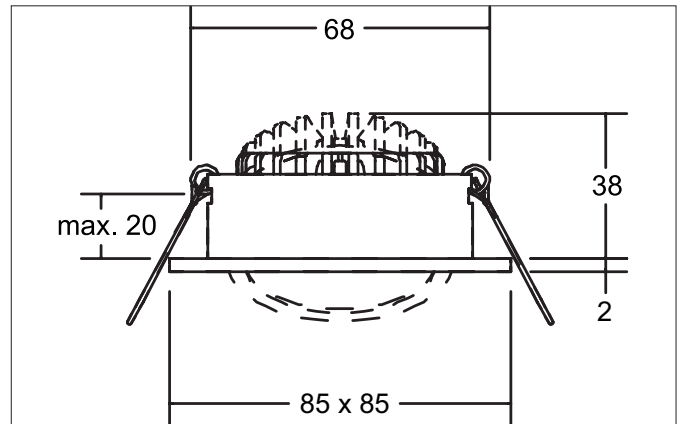

#### Tender

Recessed LED spotlight, integrated converter (DOB), trailing edge dimmable, dim2warm, with connection box, Round. Toolless ceiling installation by installation springs. Ceiling cut-out Ø 68 mm, Installation depth 38 mm, Length 85 mm, Width 85 mm, Weight 0,156 kg, Reflector silver with rotationssymmetrical, deep, wide distributed light intensity. Cover polycarbonat clear Luminous flux 380 lm, Power 1 x 6,8 W, Light colour warm white to warm white, Correlated color temperature (CCT) 3.000 K - 1.800 K, Colour rendering index CRI > 90, Rated life time L70/B50 at 25 °C: 50.000 h, Housing material: Aluminium / Polycarbonate, Colour: nickel matt, Permissible ambient temperature (ta): -20 °C up to +25 °C, Protection class (EN 61140): II, Degree of protection (DIN EN 60529): IP20. With electronic driver, Trailing-edge phase dimmable.



**OLENI-S Recessed LED spotlight, integrated converter (DOB), trailing edge dimmable, dim2warm, with connection box**  
 Article no. 12648153DW

**Product Benefits**

- Square recessed spotlight made of solid aluminum with polycarbonate cover.
- Simple and tool-free installation.
- CRI > 90.
- Low installation depth 38 mm, length 85 mm, width 85 mm, Ceiling cut-out 68 mm.
- Maximum ceiling thickness 20 mm.
- Three surface finishes available.
- With integrated converter (DOB) for connection to 230 V mains voltage.
- Supplied with connection box for quick connection.
- Phase section dimmable.
- dim2warm version (3,000 K - 1,800 K): if the luminaire is dimmed, the color temperature is reduced.
- Also available in static 3,000 K version.

| Article data           |                                                                                                           |
|------------------------|-----------------------------------------------------------------------------------------------------------|
| Article no.            | 12648153DW                                                                                                |
| GTIN                   | 4255752519621                                                                                             |
| Series name            | OLENI-S                                                                                                   |
| Short description      | Recessed LED spotlight, integrated converter (DOB), trailing edge dimmable, dim2warm, with connection box |
| Material               | Aluminium / Polycarbonate                                                                                 |
| Colour                 | nickel matt                                                                                               |
| Type of surface        | Matt                                                                                                      |
| Shape                  | Round                                                                                                     |
| Length                 | 85 mm                                                                                                     |
| Width                  | 85 mm                                                                                                     |
| Built-in diameter min. | 68 mm                                                                                                     |
| Built-in diameter max. | 68 mm                                                                                                     |
| Installation depth     | 38 mm                                                                                                     |
| Hight                  | 4 mm                                                                                                      |
| Scope of delivery      | inkl. Anschlussbox zur Durchgangsverdrahtung, 3-polig                                                     |
| Weight                 | 0.156 kg                                                                                                  |
| D licence plate        | No                                                                                                        |
| Conformance            | CE, UKCA                                                                                                  |

| Lighting technology          |                   |
|------------------------------|-------------------|
| Colour temperature           | 3.000 K - 1.800 K |
| Light colour                 | white             |
| Light output                 | Direct            |
| Luminous flux                | 380 lm            |
| System efficiency            | 56 lm/W           |
| Colour rendering             | CRI > 90          |
| Reflector                    | Faceted           |
| Reflector colour             | silver            |
| Beam angle                   | 38°               |
| Light sharing                | Symmetric         |
| Adjustable color temperature | Infinite control  |



**OLENI-S Recessed LED spotlight, integrated converter (DOB),  
trailing edge dimmable, dim2warm, with connection box**  
 Article no. 12648153DW

| Operating technology of the luminaire |                                                                                                                                                          |
|---------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
| Voltage type                          | AC                                                                                                                                                       |
| AC nominal voltage min                | 230 V                                                                                                                                                    |
| AC nominal voltage max                | 230 V                                                                                                                                                    |
| Frequency max                         | 50 Hz                                                                                                                                                    |
| Frequency min                         | 50 Hz                                                                                                                                                    |
| Lamp                                  | LED                                                                                                                                                      |
| Lamp holder                           | LED                                                                                                                                                      |
| Protection class                      | II                                                                                                                                                       |
| Degree of protection                  | IP20                                                                                                                                                     |
| Dimmable                              | Yes                                                                                                                                                      |
| Control                               | Trailing-edge phase                                                                                                                                      |
| Bulb change possible                  | The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person. |
| Rated life time L70/B50 at 25 °C      | 50,000 h                                                                                                                                                 |
| Energy efficiency class               | not required                                                                                                                                             |

| Mounting technology         |                                           |
|-----------------------------|-------------------------------------------|
| Mounting method             | Recessed mounting                         |
| Place of installation       | Ceiling-mounted                           |
| Adjustability               | Pivoted                                   |
| Swivel angle                | 20°                                       |
| Max. ceiling thickness      | 20 mm                                     |
| Further references          | No cover with thermal insulation material |
| Material cover              | Polycarbonat clear                        |
| Suitable for through-wiring | Yes                                       |

| Packing data            |                                                                                                                                                                                                                                                                                                                                                                     |
|-------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Gross weight            | 0.206 kg                                                                                                                                                                                                                                                                                                                                                            |
| Length of packaging     | 95 mm                                                                                                                                                                                                                                                                                                                                                               |
| Packaging width         | 90 mm                                                                                                                                                                                                                                                                                                                                                               |
| Packaging height        | 75 mm                                                                                                                                                                                                                                                                                                                                                               |
| Disposal at end of life | This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.<br>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment. |

| Optional accessories                                                                                                                                                  |  |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| Article no.: 5327<br>Leaf spring set                                                                                                                                  |  |
| <a href="https://www.brumberg.com/fileadmin/products/Datenblatt_00532700_2021_DE.pdf">https://www.brumberg.com/fileadmin/products/Datenblatt_00532700_2021_DE.pdf</a> |  |