
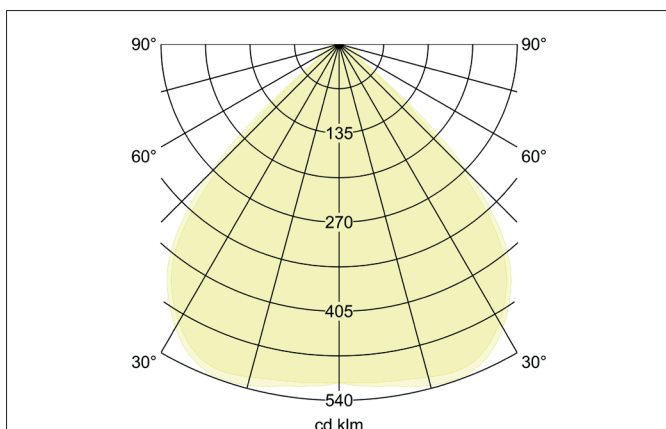
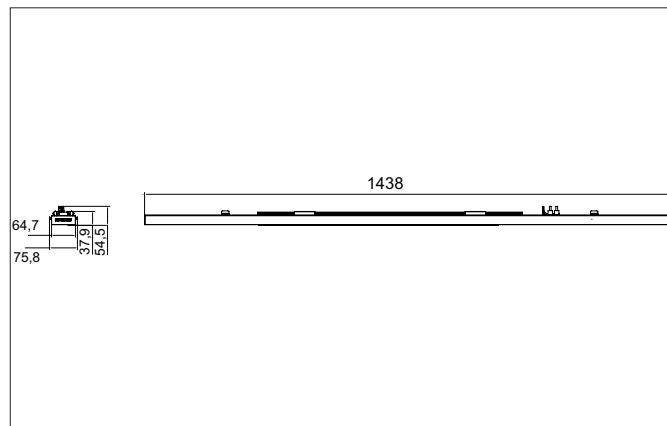



B-LIGHT™ LED device carrier

Article no. 55104074DA


Tender

LED device carrier, white, Rectangular. Compact design for harmonious implementation in well-rounded architectural room concepts. LED fixture for a modular, quick-mount continuous lighting system designed for linear lighting in industrial, logistics, and work areas. Torsion-resistant aluminum housing for long-term mechanical stability and optimized heat dissipation; suitable for dimmable operation. Linear lighting unit, designed for smart lighting control. Tool-free installation via an integrated quick-lock mechanism (mechanical latching mechanism) with immediate mechanical fixation and secure electrical contact directly in the aluminum mounting rail. System-compatible with 7-pin and 11-pin SML mounting rails. Luminaire length: 1,438 mm. Rotationally symmetric PMMA lens optics with a 90° beam angle, glare-optimized with UGR < 19 according to a documented test setup (4H/8H).

Suitable for applications with increased visual comfort requirements in accordance with DIN EN 12464-1. Luminous flux preset to 4,500 lm, Multilumen-capable (luminous flux adjustable via operating current).

DALI-dimmable in accordance with IEC 62386 (DT6) for integration into building automation systems as well as daylight- and presence-dependent control. Rated luminous flux 4,500 lm, system efficiency up to ≥ 180 lm/W, rated power approx. 19.8 W. Light color: neutral white 4,000 K, general color rendering index (CRI) > 80. Electronic ballast, DALI-dimmable (IEC 62386, DT6). Housing material: aluminum, color: white (RAL 9016). Protection class I per EN 61140, protection rating IP20 per DIN EN 60529, Lamp holder: Without fitting, Mounting method: Surface mounting, Place of installation: Ceiling-mounted, Material: Aluminium, Degree of protection: (DIN EN 60529) IP20, Protection class: (DIN EN 61140) I, Voltage: 230V AC 50Hz/60Hz, Power: 19,8 W, Amount of light sources / fittings: 1 piece, Luminous flux: 4.500 lm, Colour temperature: 4.000 K, Light colour: white, Beam angle: 90°, Adjustability: Not adjustable, With control gear: Yes, Dimmable: Yes, Type of dimming: DALI.


B-LIGHT™ LED device carrier

Article no. 55104074DA

Product Benefits

- LED gear tray with torsion-resistant aluminum housing for lasting mechanical stability and for optimized heat dissipation during dimmable operation
- Linear luminaire unit for quick-mounting continuous-row lighting systems, prepared for intelligent lighting control
- Tool-free installation using integrated quick-locking mechanism (mechanical latching mechanism); Immediate mechanical fixing and secure electrical contacting directly in the aluminum mounting rail mounting rail
- System-compatible with 7-pole and 11-pole SML trunking rails
- Luminaire length 1,438 mm
- PMMA lens optics with controlled rotationally symmetrical light distribution, 90° beam angle, glare-optimized with UGR<19 according to documented test setup (4H/8H). Rated luminous flux 4,500 lm, DALI dimmable in accordance with IEC 62386 (DT6), Designed for workplaces with increased visual comfort requirements in accordance with DIN EN 12464-1, UGR values depend on the application and room (geometry, reflectance, arrangement).
- Rated luminous flux 4,500 lm
- High system efficiency up to ≥ 180 lm/W
- Rated wattage: 19.8 W
- Light color neutral white, 4,000 K
- General color rendering index CRI > 80
- Electronic control gear, DALI dimmable (IEC 62386, DT6)
- Housing material aluminum, color white (RAL 9016)
- Protection class I in accordance with EN 61140
- Protection class IP20 in accordance with DIN EN 60529

Article data	
Article no.	55104074DA
GTIN	4255752527305
Series name	B-LIGHT™
Short description	LED device carrier
Material	Aluminium
Colour	white
Type of surface	Smooth
Shape	Rectangular
Length	1,438 mm
Width	64.7 mm
Height	54.5 mm
Weight	1.438 kg
stamp	ENEC
Conformance	CE, UKCA

Lighting technology	
Colour temperature	4.000 K
Light colour	white
Light output	Direct
Luminous flux	4,500 lm
System efficiency	227 lm/W
McAdam-Step	McAdam-Step 3
Colour rendering	CRI > 80
Luminaire optics	Lens
Reflector	Without
Beam angle	90°
Glare evaluation	UGR < 19
Light sharing	Symmetric
Adjustable color temperature	No


B-LIGHT™ LED device carrier

Article no. 55104074DA

Operating technology of the luminaire	
System output	19.8 W
Voltage type	AC/DC
AC nominal voltage max	230 V
Frequency max	60 Hz
Lamp	LED exchangeable
Lamp holder	Without fitting
Protection class	I
Degree of protection	IP20
Ambient temperature	-20°C up to +45°C
Dimmable	Yes
Control	DALI
Bulb change possible	The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person.
Rated life L80/B10 at 25 °C	50,000 h
Energy efficiency class	not required
Number of operating devices used	1 Qty

Mounting technology	
Mounting method	Surface mounting
Place of installation	Ceiling-mounted
Adjustability	Not adjustable
Impact resistance	IK03
Further references	Indoor
Application	Indoor
Cover	PMMA
Suitable for through-wiring	Yes

Packing data	
Gross weight	1635 kg
Length of packaging	1,453 mm
Packaging width	82 mm
Packaging height	68 mm
Disposal at end of life	This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately. By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.

Required accessories	
Article no.: 55011070 11-pole trunking rail Dimensions: 1,438 mm x 64.7 mm x 45.5 mm https://www.brumberg.com/fileadmin/products/Datenblatt_55011070_2021_DE.pdf	
Article no.: 55001070 7-pin mounting rail Dimensions: 1,438 mm x 64.7 mm x 45.5 mm https://www.brumberg.com/fileadmin/products/Datenblatt_55001070_2021_DE.pdf	