




LED power supply 24 V DC, 4 channel, DALI-2 / DALI-DT8 dimmable

Article no. 17290000

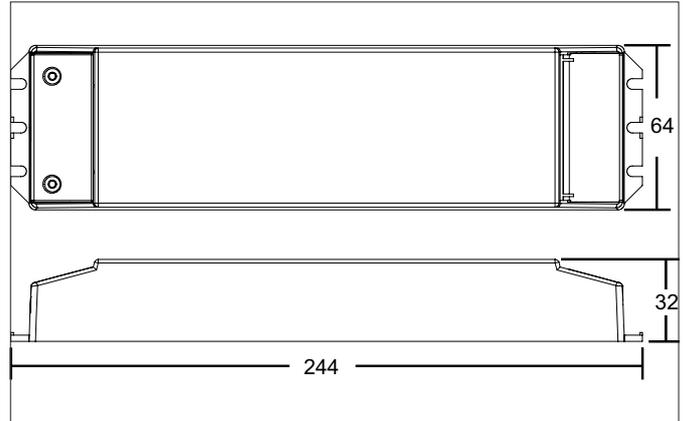

Tender
 LED power supply 24 V DC, 4 channel, DALI-2 / DALI-DT8 dimmable, white, Rectangular. Material: Plastic, Degree of protection: according to DIN EN 60529 IP20, Protection class: (EN 61140) II, Voltage: 230V AC 50Hz, Power: 100 W, Dimmable: Yes, Type of dimming: DALI-2.

Product Benefits

- LED power supply 24 V DC incl. DALI dimmer.
- 4 channel LED dimmer.
- Control via DALI DT8, TunableWhite and RGBW
- sec. Power max. 100 Watt

Article data	
Article no.	17290000
GTIN	4251433988816
Short description	LED power supply 24 V DC, 4 channel, DALI-2 / DALI-DT8 dimmable
Material	Plastic
Colour	white
Shape	Rectangular
Length	244 mm
Width	64 mm
Hight	32 mm
Weight	0.47 kg
stamp	ENEC, MM
Conformance	CE



LED power supply 24 V DC, 4 channel, DALI-2 / DALI-DT8 dimmable

Article no. 17290000

Operating technology of driver	
AC nominal voltage min	100 V
AC nominal voltage max	240 V
Frequency min	47 Hz
Frequency max	63 Hz
Protection class	II
Degree of protection	IP20
Power	1 W
Power max.	100 W
Starting current	50 A
Suitable for emergency lighting	No
measure point (tc)	75 °C
Power factor	0.9
Output voltage max	24.00 V
Output voltage min.	24.00 V
Control	DALI-2 , DALI-DT8
Connection type-primary	Screw-in connection
Connection type-secondary	Screwed terminal
Number of poles	5

Packing data	
Gross weight	0.51 kg
Length of packaging	255 mm
Packaging width	72 mm
Packaging height	42 mm
Disposal at end of life	<p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p>