




LED power supply 24 V DC, 4 channel, DALI-2 / DALI-DT8 dimmable

Article no. 17291000

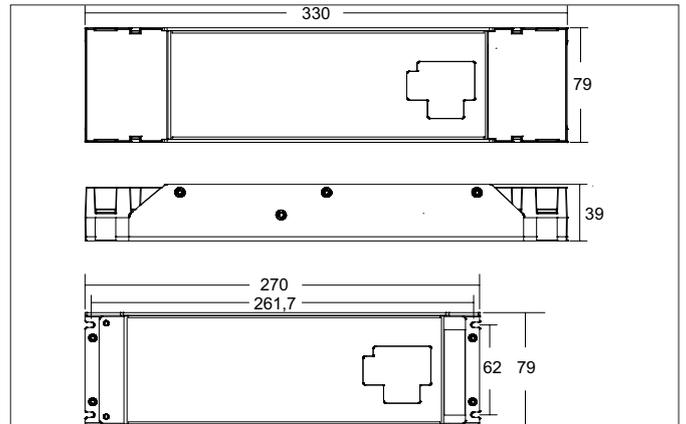

Tender
 LED power supply 24 V DC, 4 channel, DALI-2 / DALI-DT8 dimmable, white, Rectangular. Material: Aluminium / Plastic, Degree of protection: according to DIN EN 60529 IP20, Protection class: (EN 61140) I, Voltage: 230V AC 50Hz, Power: 200 W, Dimmable: Yes, Type of dimming: DALI-2.

Product Benefits

- LED power supply 24 V DC incl. DALI dimmer.
- 4 channel LED dimmer.
- Control via DALI DT8, TunableWhite and RGBW
- sec. Power max. 200 Watt

Article data	
Article no.	17291000
GTIN	4251433988823
Short description	LED power supply 24 V DC, 4 channel, DALI-2 / DALI-DT8 dimmable
Material	Aluminium / Plastic
Colour	white
Shape	Rectangular
Length	330 mm
Width	79 mm
Height	39 mm
Weight	0.925 kg
stamp	ENEC, MM
Conformance	CE



LED power supply 24 V DC, 4 channel, DALI-2 / DALI-DT8 dimmable

Article no. 17291000

Operating technology of driver	
AC nominal voltage min	100 V
AC nominal voltage max	240 V
Frequency min	47 Hz
Frequency max	63 Hz
Protection class	I
Degree of protection	IP20
Power	1 W
Power max.	200 W
Starting current	65 A
Suitable for emergency lighting	No
measure point (tc)	85 °C
Power factor	0.98
Output voltage max	24.00 V
Output voltage min.	24.00 V
Control	DALI-2 , DALI-DT8
Connection type-primary	Plug-in connection
Connection type-secondary	Plug clamp
Number of poles	5

Packing data	
Gross weight	0.997 kg
Length of packaging	345 mm
Packaging width	88 mm
Packaging height	47 mm
Disposal at end of life	<p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p>