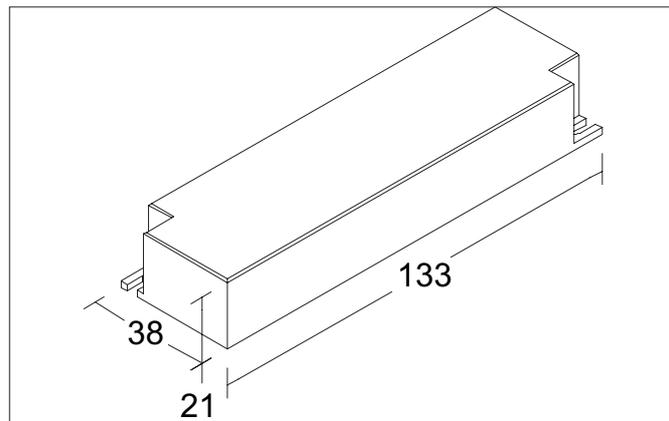
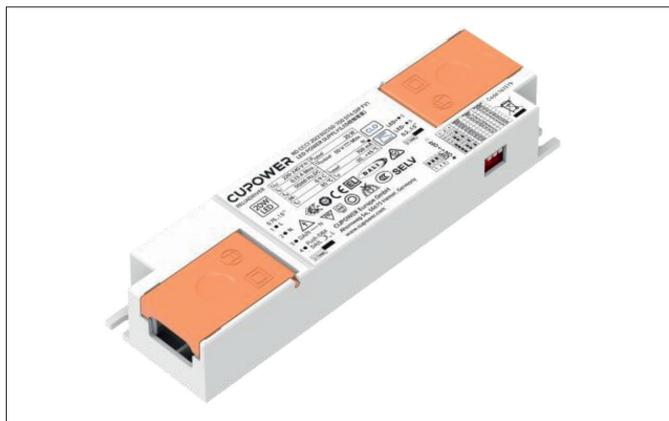


MUNA PRO MUNA PRO 20 W LED converter

Article no. 17832010


Tender

MUNA PRO 20 W LED converter, Rectangular. Material: Plastic, Degree of protection: according to DIN EN 60529 IP20, Voltage: 230V AC 50Hz, Power: 20 W, Dimmable: Yes, Type of dimming: DALI-2.

Article data	
Article no.	17832010
GTIN	4255752529408
Series name	MUNA PRO
Short description	MUNA PRO 20 W LED converter
Material	Plastic
Shape	Rectangular
Length	133 mm
Width	38 mm
Hight	21 mm
Weight	0.054 kg
stamp	ENEC, EL
Conformance	CE, UKCA

MUNA PRO MUNA PRO 20 W LED converter

Article no. 17832010

Operating technology of driver	
AC nominal voltage min	198 V
AC nominal voltage max	264 V
Frequency min	50 Hz
Frequency max	60 Hz
DC nominal voltage min	176 V
DC nominal voltage max	276 V
Degree of protection	IP20
Power	20 W
Output_ripple_current	5
Starting current	4,66 A, 40 µs
Suitable for emergency lighting	Yes
measure point (tc)	85 °C
Version	ohne Konfektionierung
Power factor	0.9
max. no. lights on B10 A	92
max. no. lights on B16 A	147
max. no. lights on C16 A	147
max. no. lights on C10 A	92
Output voltage max	42.00 V
Output voltage min.	9.00 V
Flicker value Pst LM	1.00
Stroboscopic effect value SVM	.40
Control	DALI-2 , PUSH-Dimm
Adjusting the current	Dip
Connection type-primary	Connection box
Connection type-secondary	Plug clamp
Number of poles	5
Average nominal lifespan	50000 h
Output current	500 mA

Packing data	
Gross weight	0.125 kg
Length of packaging	150 mm
Packaging width	120 mm
Packaging height	60 mm
Disposal at end of life	<p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p>

Optional accessories