




LED converter 350 mA, DALI dimmable (digital)
Article no. 17682020

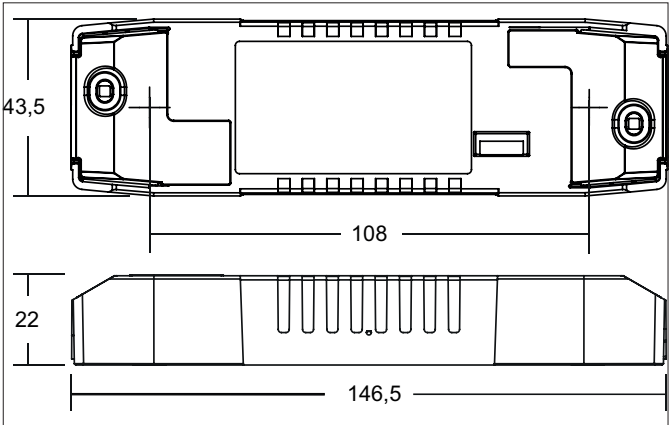

Tender	
LED converter 350 mA, DALI dimmable (digital), white, Rectangular. Material: Plastic, Degree of protection: according to DIN EN 60529 IP20, Protection class: (EN 61140) II, Voltage: 230V AC 50Hz , Power: 18,5 W, Dimmable: Yes, Type of dimming: DALI-2.	

Article data	
Article no.	17682020
GTIN	4251433994442
Short description	LED converter 350 mA, DALI dimmable (digital)
Material	Plastic
Colour	white
Shape	Rectangular
Length	146.5 mm
Width	43.5 mm
Hight	22 mm
Scope of delivery	Plug&Play-Ausgangsleitung, Länge 110 mm und Anschlussbox
Weight	0.182 kg
stamp	ENEC 05, EL
Conformance	CE, UKCA


LED converter 350 mA, DALI dimmable (digital)

Article no. 17682020

Operating technology of driver	
AC nominal voltage min	198 V
AC nominal voltage max	264 V
Frequency min	47 Hz
Frequency max	63 Hz
DC nominal voltage min	176 V
DC nominal voltage max	275 V
Protection class	II
Degree of protection	IP20
Power	1.8 W
Power max.	18.5 W
Output_ripple_current	3
Starting current	5 A, 50 µs
Suitable for emergency lighting	No
measure point (tc)	80 °C
Version	Plug&Play + connection box
Power factor	0.95
max. no. lights on B16 A	50
Output voltage max	54.00 V
Output voltage min.	10.00 V
Flicker value Pst LM	1.00
Stroboscopic effect value SVM	.40
Control	DALI-2 , PUSH-Dimm
Number of poles	4
Environment temperature (ta)	-25 °C up to +40 °C
Measure point (tc)	max. +80 °C
Output current	350 mA
Safety devices against overvoltage	yes
Safety devices against thermal overload	yes

Packing data	
Gross weight	0.232 kg
Length of packaging	100 mm
Packaging width	100 mm
Packaging height	100 mm
Disposal at end of life	This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately. By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.