




LED converter 500 mA, TunableWhite, DALI-DT8 dimmable, 15 W
 Article no. 17821010

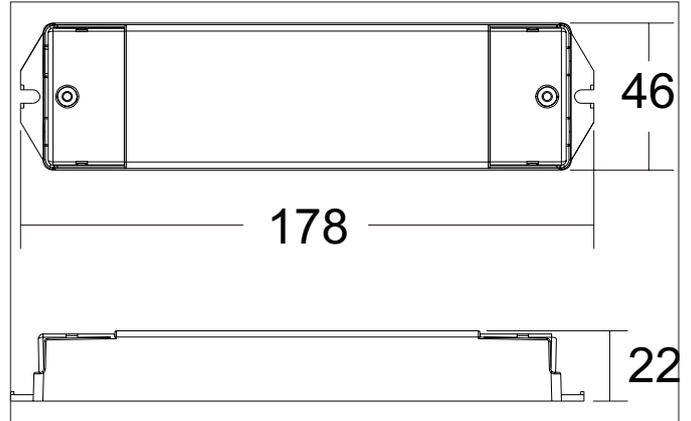

Tender
 LED converter 500 mA, TunableWhite, DALI-DT8 dimmable, 15 W, white, Rectangular. Material: Plastic, Degree of protection: according to DIN EN 60529 IP20, Protection class: (EN 61140) II, Voltage: 230V AC 50Hz , Power: 15 W, Dimmable: Yes, Type of dimming: DALI-2.

Article data	
Article no.	17821010
GTIN	4255752515524
Short description	LED converter 500 mA, TunableWhite, DALI-DT8 dimmable, 15 W
Material	Plastic
Colour	white
Shape	Rectangular
Length	178 mm
Width	46 mm
Hight	22 mm
Weight	0.122 kg
stamp	ENEC
Conformance	CE


LED converter 500 mA, TunableWhite, DALI-DT8 dimmable, 15 W
 Article no. 17821010

Operating technology of driver	
AC nominal voltage min	200 V
AC nominal voltage max	240 V
Frequency min	47 Hz
Frequency max	63 Hz
Protection class	II
Degree of protection	IP20
Power	3 W
Power max.	15 W
Starting current	6,16
Suitable for emergency lighting	No
measure point (tc)	85 °C
Version	without
Power factor	0.95
Output voltage max	30.00 V
Output voltage min.	5.00 V
Control	DALI-2 , DALI-DT8
Number of poles	4
Flicker-free	Yes
Environment temperature (ta)	-20 °C up to +45 °C
Measure point (tc)	max. +85 °C
Output current	500 mA
Safety devices against overvoltage	yes
Safety devices against thermal overload	yes

Packing data	
Gross weight	0.145 kg
Length of packaging	45 mm
Packaging width	35 mm
Packaging height	190 mm
Disposal at end of life	<p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p>