




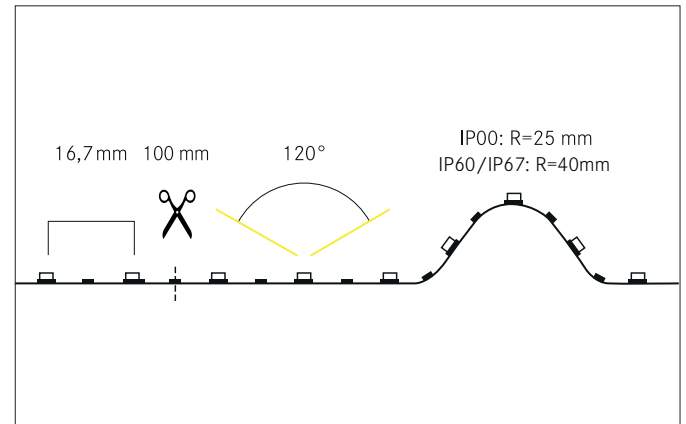

**QUALITYFLEX Individual TunableWhite LED flex board, 100 mm,  
CRI > 90, 19.2 W / m, IP67**  
Article no. 75276004

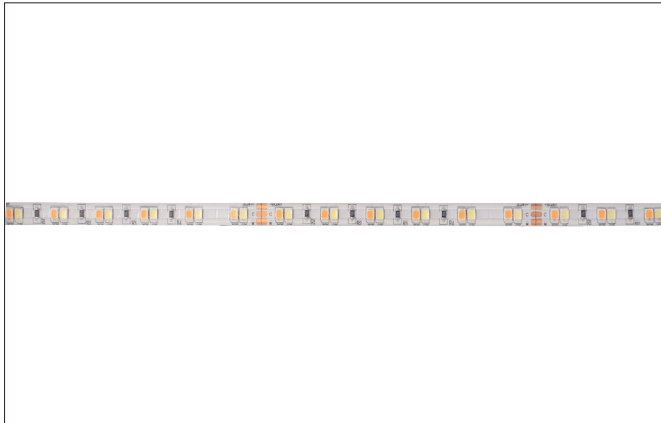

**Tender**

LED flex lighting TunableWhite, 100 mm, CRI > 90, 19.2 W / m, IP67, white, Light colour: white, 6.500K-2.000K, CRI > 90. LED flex lighting for decorative, technical as well as efficient lighting of light coves, linear applications and backlighting, basic or general lighting of rooms, architectural applications and for areas where high illumination is required, such as indirect or direct lighting, luminous ceilings, gastronomy lighting and much more. Length: 100 mm . Lamp power per meter: 19.2 W/m, Degree of protection: IP67, Protection class: III, Voltage: 24V DC, Beam angle: 120.0 °, 120 LEDs per meter, Chip distance (Short Pitch) : 16,7mm. For individual application, the LED flex board can be used all 100 mm be cut back. If the LED flex board is shortened, the IP protection must be restored by the customer. The maximum system length of 5.000 mm must not be exceeded with one feed-in.

**Product Benefits**

- Compatible with our TunableWhite LED insert 12843004.
- Color temperature and brightness can be changed with 2-channel dimming.
- Optimally controllable via DALI (DT8) or TunableWhite radio remote control.
- Protection class: IP67
- Color temperature: 2,000 Kelvin to 6,500 Kelvin.
- Beam angle: 120°.
- High color rendering with CRI>90.



**QUALITYFLEX Individual TunableWhite LED flex board, 100 mm,  
CRI > 90, 19.2 W / m, IP67**  
 Article no. 75276004

| Article data                  |                                                                 |
|-------------------------------|-----------------------------------------------------------------|
| Article no.                   | 75276004                                                        |
| GTIN                          | 4251433954224                                                   |
| Series name                   | QUALITYFLEX Individual                                          |
| Short description             | TunableWhite LED flex board, 100 mm, CRI > 90, 19.2 W / m, IP67 |
| Colour                        | white                                                           |
| Length                        | 100 mm                                                          |
| Width                         | 12 mm                                                           |
| Height                        | 5 mm                                                            |
| Scope of delivery             | incl. 1 x assembly instructions                                 |
| Weight                        | 0.02 kg                                                         |
| Length of the connection line | 350 mm                                                          |
| Wide-fitting end cap          | 14.5 mm                                                         |
| Height of the fitted end cap  | 7 mm                                                            |
| Conformance                   | CE, UKCA                                                        |

| Lighting technology          |                   |
|------------------------------|-------------------|
| Colour temperature           | 2.000 K - 6.500 K |
| Light colour                 | white             |
| Color Temperature 1          | 2,000 K           |
| Color Temperature 2          | 6,500 K           |
| Luminous flux                | 650 - 920 lm/m    |
| Luminous flux 1              | 650 lm/m          |
| Luminous flux 2              | 920 lm/m          |
| System efficiency            | 48 lm/W           |
| McAdam-Step                  | McAdam-Step 3     |
| Colour rendering             | CRI > 90          |
| Beam angle                   | 120°              |
| Adjustable color temperature | Infinite control  |

| Operating technology of the luminaire |                                                                           |
|---------------------------------------|---------------------------------------------------------------------------|
| System output                         | 96 W                                                                      |
| Lamp power per meter                  | 19.2 W/m                                                                  |
| Voltage type                          | DC                                                                        |
| DC nominal voltage max                | 24 V                                                                      |
| Lamp                                  | LED                                                                       |
| Protection class                      | III                                                                       |
| Degree of protection                  | IP67                                                                      |
| Ambient temperature                   | -10°C up to +40°C                                                         |
| Dimmable                              | Yes                                                                       |
| Wire number                           | 3                                                                         |
| Control                               | Depending on driver                                                       |
| Length of the connection line         | 350 mm                                                                    |
| Cable assignment                      | red = + pole<br>white = - pole, cold white<br>yellow = - pole, warm white |
| Design of the connecting cable        | one-sided                                                                 |
| Bulb change possible                  | No                                                                        |
| Rated life time L70/B50 at 25 °C      | 181,000 h                                                                 |
| Rated life time L80/B10 at 25 °C      | 145,000 h                                                                 |
| Energy efficiency class               | not required                                                              |



**QUALITYFLEX Individual TunableWhite LED flex board, 100 mm,  
CRI > 90, 19.2 W / m, IP67**  
 Article no. 75276004

| Operating technology of QualityFlex |                     |
|-------------------------------------|---------------------|
| Power per meter                     | 19.2 W/m            |
| Short Pitch                         | 16.7 mm             |
| Number of lamps per meter           | 120 Qty             |
| Length of individual sections       | 100 mm              |
| Smallest bend radius                | 40 mm               |
| Control                             | Negative (3-core)   |
| Length                              | 100 mm              |
| Maximum module length               | 5,000 mm            |
| Circuit type                        | Parallel conduction |
| LED Type                            | 2835 LED            |

| Packing data            |                                                                                                                                                                                                                                                                                                                                                                                |
|-------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Gross weight            | 0.022 kg                                                                                                                                                                                                                                                                                                                                                                       |
| Length of packaging     | 70 mm                                                                                                                                                                                                                                                                                                                                                                          |
| Packaging width         | 45 mm                                                                                                                                                                                                                                                                                                                                                                          |
| Packaging height        | 80 mm                                                                                                                                                                                                                                                                                                                                                                          |
| Disposal at end of life | <p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p> |

| Compatible Driver |     |       |        |        |       |       |
|-------------------|-----|-------|--------|--------|-------|-------|
| Article no.       |     |       |        |        |       |       |
| 17206000          |     |       |        |        |       |       |
| 17207000          |     |       |        |        |       |       |
| 17214000          |     |       |        |        |       |       |
| 17223000          |     |       |        |        |       |       |
| 17224000          |     |       |        |        |       |       |
| 17225000          |     |       |        |        |       |       |
| 17226000          |     |       |        |        |       |       |
| 17227000          |     |       |        |        |       |       |
| 17228000          |     |       |        |        |       |       |
| 17240000          | 1 W | 20 W  | on/off | 150 mm | 40 mm | 30 mm |
| 17241000          | 1 W | 40 W  | on/off | 210 mm | 40 mm | 30 mm |
| 17242000          | 1 W | 60 W  | on/off | 250 mm | 40 mm | 30 mm |
| 17243000          | 1 W | 120 W | on/off | 300 mm | 40 mm | 30 mm |
| 17244000          | 1 W | 150 W | on/off | 310 mm | 40 mm | 30 mm |
| 17260000          |     |       |        |        |       |       |



**QUALITYFLEX Individual TunableWhite LED flex board, 100 mm,  
CRI > 90, 19.2 W / m, IP67**  
 Article no. 75276004

| Compatible Controller |       |       |                             |        |         |       |
|-----------------------|-------|-------|-----------------------------|--------|---------|-------|
| Article no.           |       | Power | Control                     | Length | Width   | Hight |
| 18151000              | 1 W   | 240 W | KNX                         | 170 mm | 59 mm   | 30 mm |
| 18152000              | 1 W   | 240 W | DALI-DT6                    | 170 mm | 59 mm   | 30 mm |
| 18153000              | 1 W   | 240 W | DMX                         | 170 mm | 59 mm   | 30 mm |
| 18154000              | 1 W   | 240 W | 1-10 V                      | 170 mm | 59 mm   | 30 mm |
| 18155000              | 1 W   | 240 W | DALI-2                      | 170 mm | 59 mm   | 30 mm |
| 18156000              | 1 W   | 48 W  | 1-10 V                      | 167 mm | 51 mm   | 23 mm |
| 18157000              | 1 W   | 240 W | ZigBee                      | 145 mm | 46.5 mm | 16 mm |
| 18161000              | 1 W   | 240 W | KNX                         | 72 mm  | 90 mm   | 70 mm |
| 18162000              | 1 W   | 240 W | DALI-DT6                    | 54 mm  | 110 mm  | 66 mm |
| 18164000              | 1 W   | 240 W | 1-10 V                      | 54 mm  | 110 mm  | 66 mm |
| 18165000              | 1 W   | 240 W | DALI-2                      | 54 mm  | 110 mm  | 66 mm |
| 17518000              | 120 W | 240 W | Wireless technology control | 145 mm | 47 mm   | 16 mm |
| 18192000              | 1 W   | 240 W | Wireless technology control | 160 mm | 45 mm   | 18 mm |
| 17290000              | 1 W   | 100 W | DALI-2                      | 244 mm | 64 mm   | 32 mm |
| 17291000              | 1 W   | 200 W | DALI-2                      | 330 mm | 79 mm   | 39 mm |

| Compatible Profiles           |  |  |  |  |
|-------------------------------|--|--|--|--|
| Short description             |  |  |  |  |
| Recessed profile              |  |  |  |  |
| 53654070                      |  |  |  |  |
| LED recessed profile          |  |  |  |  |
| 53759070                      |  |  |  |  |
| Plaster profile               |  |  |  |  |
| 53655070                      |  |  |  |  |
| Plaster profile               |  |  |  |  |
| 53656070                      |  |  |  |  |
| Surface-mounted profile       |  |  |  |  |
| 53603070                      |  |  |  |  |
| LED surface-mounted profile   |  |  |  |  |
| 53606070                      |  |  |  |  |
| Surface-mounted profile       |  |  |  |  |
| 53607080                      |  |  |  |  |
| Surface-mounted profile, high |  |  |  |  |
| 53381302                      |  |  |  |  |