



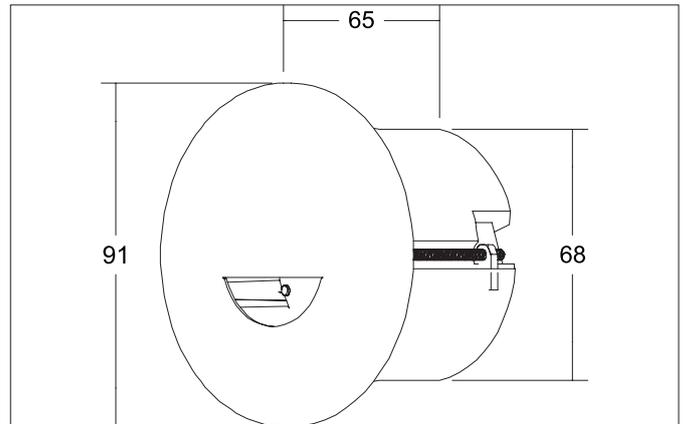

ADAPTwall LED wall recessed light, for device socket

Article no. 10371073

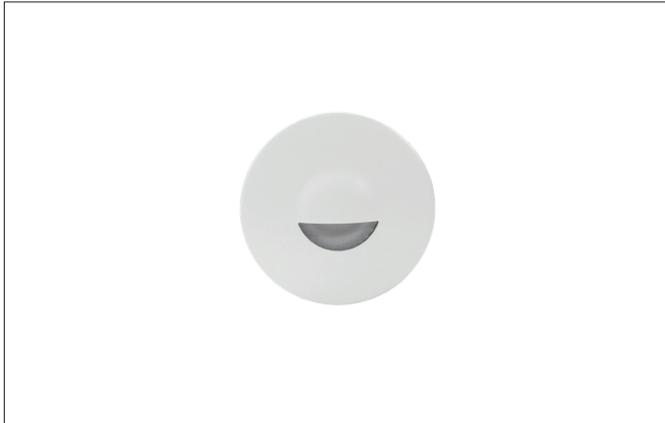

Tender

LED wall recessed light, for device socket, Round. Ceiling cut-out \varnothing 68 mm, Installation depth 65 mm, Outer diameter 91 mm, Weight 0,173 kg, asymmetric Luminous flux 180 lm, Power 1 x 2 W, Light colour warm white, Correlated color temperature (CCT) 3.000 K, Colour rendering index CRI > 80, Rated life time L70/B50 at 25 °C: 35.000 h, Housing material: Aluminium / Steel / Plastic, Colour: white matt, Permissible ambient temperature (ta): -20 °C up to +25 °C, Protection class (EN 61140): II, Degree of protection (DIN EN 60529): IP20. With electronic driver, on/off switchable.

Product Benefits

- The name says it all: Adapt is suitable for installation in different mounting situations, spring or screw mounting, for cavity walls, cavity walls and housing mounting.
- For example, Adapt is ideally suited for installation in Kaiser device boxes 9064-02, 9264-12, HWD30 / 9464-50, 9464-05 and any deep appliance junction box with a screw spacing of 60 mm.
- For installation in appliance boxes, a spacer is included in the scope of delivery included so that the converter does not rest directly on the luminaire.
- For installation in appliance boxes for cut-out dimensions of 68 mm, the luminaire must be mounted in can be used in the reduction rings according to the accessories list.
- Installation in airtight and spatially restricted installation situations possible.
- The factory-installed leaf springs (for installation dimension 56 mm) can be quickly replaced by built-in leg springs (for installation in ceiling openings of existing ceiling openings of 52 - 74 mm).



ADAPTwall LED wall recessed light, for device socket

Article no. 10371073

Article data	
Article no.	10371073
GTIN	4251433953753
Series name	ADAPTwall
Short description	LED wall recessed light, for device socket
Material	Aluminium / Steel / Plastic
Colour	white matt
Type of surface	Matt
Shape	Round
Outer diameter	91 mm
Built-in diameter	68 mm
Installation depth	65 mm
Hight	12 mm
Weight	0.173 kg
D licence plate	No
Conformance	CE, UKCA

Lighting technology	
Colour temperature	3.000 K
Light colour	white
Luminous flux	180 lm
System efficiency	90 lm/W
Colour rendering	CRI > 80
Reflector	Without
Light sharing	Asymmetric
Adjustable color temperature	No

Operating technology of the luminaire	
System output	2 W
Voltage type	AC
AC nominal voltage max	230 V
Frequency max	50 Hz
Lamp	LED
Lamp holder	Without fitting
Protection class	II
Degree of protection	IP20
Control	on/off
Bulb change possible	The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person.
Rated life time L70/B50 at 25 °C	35,000 h
Energy efficiency class	not required

Mounting technology	
Mounting method	Recessed mounting
Place of installation	Wall-mounted
Adjustability	Not adjustable
Material cover	Without cover

Packing data	
Gross weight	0.204 kg
Length of packaging	105 mm
Packaging width	90 mm
Packaging hight	55 mm
Disposal at end of life	This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately. By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.



ADAPTwall LED wall recessed light, for device socket

Article no. 10371073

Optional accessories

Article no.: 81201370

Reducing ring D 110 mm, for luminaire cut-out size 68 mm

Dimensions: 110 mm

https://www.brumberg.com/fileadmin/products/Datenblatt_81201370_2021_DE.pdf

Article no.: 81202370

Reducing ring D 130 mm, for luminaire cut-out size 68 mm

Dimensions: 130 mm

https://www.brumberg.com/fileadmin/products/Datenblatt_81202370_2021_DE.pdf

Article no.: 81203370

Reducing ring D 145 mm, for luminaire cut-out size 68 mm

Dimensions: 145 mm

https://www.brumberg.com/fileadmin/products/Datenblatt_81203370_2021_DE.pdf