
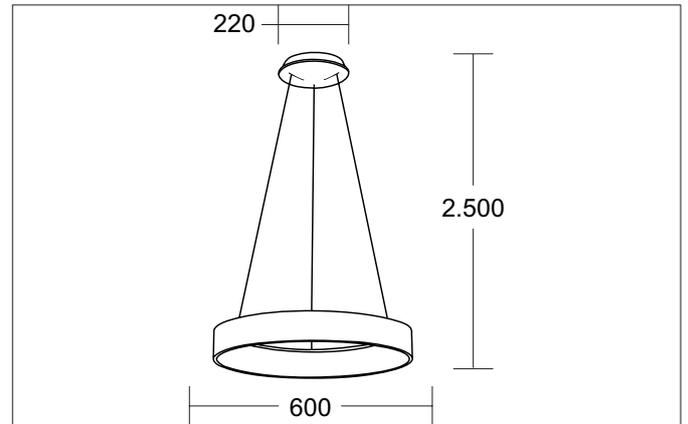



**GEORGA LED pendant light, 2CCT, switchable**  
 Article no. 57429183

**Tender**

LED pendant light, 2CCT, switchable, Round. Luminaire diameter 600.0 mm, Height 85.0 mm, for pendulum mounting. Pendulum length max. 2500.0 mm Weight 3.6 kg, with rotationssymmetrical, deep, wide distributed light intensity. Cover plastic, opal Luminous flux 1.950 lm, Power 1 x 42 W, Light colour warm white, Correlated color temperature (CCT) 3.000 K, Colour rendering index CRI > 80, Rated life time L70/B50 at 25 °C: 50.000 h, Rated life time L80/B50 at 25 °C: 50.000 h, Housing material: Steel / Plastic, Colour: black structure, Permissible ambient temperature (ta): -20 °C up to +25 °C, Protection class (EN 61140): I, Degree of protection (DIN EN 60529): IP20. With electronic driver, Trailing-edge phase dimmable.

**Product Benefits**

- Decorative pendant luminaire with phase-dimmable converter.
- Pendant length of 2,500 mm can be shortened on site.
- A matching surface-mounted luminaire (57428183) is also available - for the illumination of areas, for example, where pendant suspension is not possible or not desired.


**GEORGA LED pendant light, 2CCT, switchable**

Article no. 57429183

| Article data      |   |
|-------------------|---|
| Article no.       | 57429183  |
| GTIN              | 4255752522829   |
| Series name       | GEORGA  |
| Short description | LED pendant light, 2CCT, switchable                   |
| Material          | Steel / Plastic                                       |
| Colour            | black structure                                       |
| Type of surface   | Structure   |
| Shape             | Round   |
| Outer diameter    | 600 mm  |
| Height            | 85 mm   |
| Scope of delivery | incl. converter for connection to 230 V mains voltage |
| Weight            | 3.6 kg  |
| D licence plate   | No  |
| Conformance       | CE, UKCA  |

| Lighting technology          |                   |
|------------------------------|-------------------|
| Colour temperature           | 3.000 K / 4.000 K |
| Light colour                 | white             |
| Light output                 | Direct            |
| Luminous flux                | 1,950 lm          |
| System efficiency            | 46 lm/W           |
| McAdam-Step                  | McAdam-Step 3     |
| Colour rendering             | CRI > 80          |
| Reflector                    | Without           |
| Beam angle                   | 110°              |
| Light sharing                | Symmetric         |
| Adjustable color temperature | Stages            |

| Operating technology of the luminaire |  |
|---------------------------------------|--|
| System output                         | 42 W   |
| Voltage type                          | AC   |
| AC nominal voltage max                | 230 V  |
| Frequency max                         | 50 Hz  |
| Lamp                                  | LED  |
| Protection class                      | I  |
| Degree of protection                  | IP20   |
| Dimmable                              | Yes  |
| Control                               | Trailing-edge phase  |
| Bulb change possible                  | The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person. |
| Rated life time L70/B50 at 25 °C      | 50,000 h   |
| Rated life time L80/B50 at 25 °C      | 50.000 h   |
| Energy efficiency class               | not required   |

| Mounting technology   |                  |
|-----------------------|------------------|
| Mounting method       | Surface mounting |
| Place of installation | Ceiling-mounted  |
| Adjustability         | Not adjustable   |
| Pendulum length max.  | 2,500 mm         |
| Material cover        | Plastic, opal    |

**GEORGA LED pendant light, 2CCT, switchable**  
Article no. 57429183

| Packing data            |  |
|-------------------------|--|
| Gross weight            | 4.8 kg   |
| Length of packaging     | 640 mm   |
| Packaging width         | 640 mm   |
| Packaging height        | 130 mm   |
| Disposal at end of life | <p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p> |