
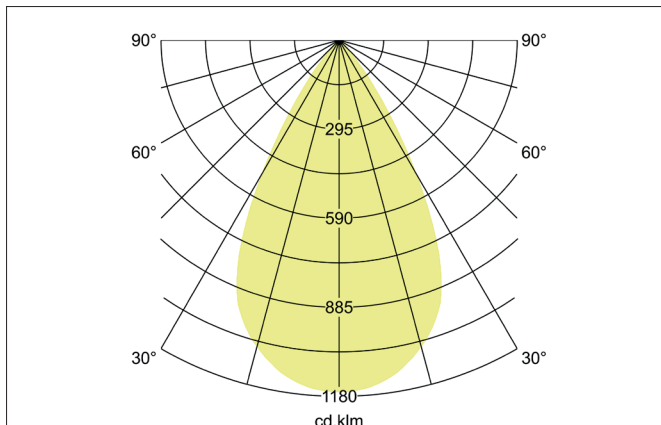
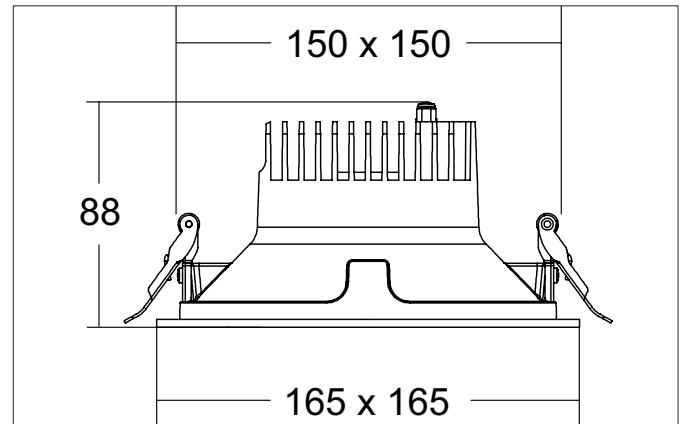



**APOLLO MIDI LED downlight, square, on/off switchable**

Article no. 40643183


**Tender**

LED downlight, square, on/off switchable, Square. Toolless ceiling installation by installation springs. Ceiling cut-out L x W 150 x 150 mm, Installation depth 88 mm, Length 165 mm, Width 165 mm, Weight 0,55 kg, Reflector silver with rotationssymmetrical, deep, wide distributed light intensity. Cover plastic, transparent. Luminous flux 1.869 lm, UGR < 19, Power 1 x 14,5 W, Light colour warm white, Correlated color temprature (CCT) 3.000 K, Colour rendering index CRI > 90, Rated life time L80/B10 at 25 °C: 50.000 h, Rated life time L80/B50 at 25 °C: 50.000 h, Housing material: Aluminium / Glass / Plastic, Colour: black structure, Permissible ambient temperature (ta): -20 °C up to +25 °C, Protection class (EN 61140): II, Degree of protection (DIN EN 60529): IP20. With electronic driver, on/off switchable.


**APOLLO MIDI LED downlight, square, on/off switchable**

Article no. 40643183

| Article data       |                                          |
|--------------------|------------------------------------------|
| Article no.        | 40643183                                 |
| GTIN               | 4251433980612                            |
| Series name        | APOLLO MIDI                              |
| Short description  | LED downlight, square, on/off switchable |
| Material           | Aluminium / Glass / Plastic              |
| Colour             | black structure                          |
| Type of surface    | Structure                                |
| Shape              | Square                                   |
| Length             | 165 mm                                   |
| Width              | 165 mm                                   |
| Built-in length    | 150 mm                                   |
| Built-in width     | 150 mm                                   |
| Installation depth | 88 mm                                    |
| Weight             | 0.55 kg                                  |
| D licence plate    | No                                       |
| Conformance        | CE, UKCA                                 |

| Lighting technology          |            |
|------------------------------|------------|
| Colour temperature           | 3.000 K    |
| Light colour                 | white      |
| Light output                 | Direct     |
| Luminous flux                | 1,869 lm   |
| System efficiency            | 129 lm/W   |
| Colour rendering             | CRI > 90   |
| Reflector                    | High-gloss |
| Reflector colour             | silver     |
| Beam angle                   | 55°        |
| Glare evaluation             | UGR < 19   |
| Light sharing                | Symmetric  |
| Adjustable color temperature | No         |

| Operating technology of the luminaire |                                                                                                                                                          |
|---------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
| System output                         | 14.5 W                                                                                                                                                   |
| Voltage type                          | AC                                                                                                                                                       |
| AC nominal voltage max                | 230 V                                                                                                                                                    |
| Frequency max                         | 50 Hz                                                                                                                                                    |
| Lamp                                  | LED                                                                                                                                                      |
| Lamp holder                           | Without fitting                                                                                                                                          |
| Protection class                      | II                                                                                                                                                       |
| Degree of protection                  | IP20                                                                                                                                                     |
| Control                               | on/off                                                                                                                                                   |
| Bulb change possible                  | The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person. |
| Rated life time L80/B10 at 25 °C      | 50.000 h                                                                                                                                                 |
| Rated life time L80/B50 at 25 °C      | 50.000 h                                                                                                                                                 |
| Energy efficiency class               | not required                                                                                                                                             |

| Mounting technology         |                                           |
|-----------------------------|-------------------------------------------|
| Mounting method             | Recessed mounting                         |
| Place of installation       | Ceiling-mounted                           |
| Adjustability               | Not adjustable                            |
| Further references          | No cover with thermal insulation material |
| Material cover              | Plastic, transparent                      |
| Suitable for through-wiring | No                                        |



**APOLLO MIDI LED downlight, square, on/off switchable**  
Article no. 40643183

| Packing data            |                                                                                                                                                                                                                                                                                                                                                                                |
|-------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Gross weight            | 0.61 kg                                                                                                                                                                                                                                                                                                                                                                        |
| Length of packaging     | 165 mm                                                                                                                                                                                                                                                                                                                                                                         |
| Packaging width         | 165 mm                                                                                                                                                                                                                                                                                                                                                                         |
| Packaging hight         | 87 mm                                                                                                                                                                                                                                                                                                                                                                          |
| Disposal at end of life | <p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p> |