





**APOLLO MICRO LED downlight, round, on/off switchable**  
Article no. 41611175

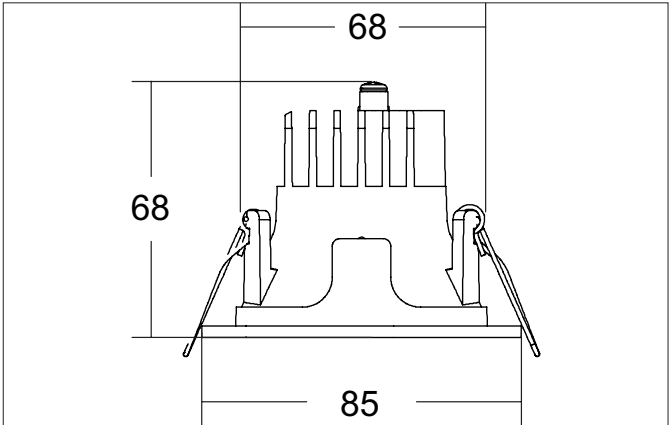

| Tender                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |  |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| LED downlight, round, on/off switchable, Round.Toolless ceiling installation by installation springs. Ceiling cut-out Ø 68 mm, Installation depth 68 mm, Outer diameter 85 mm, Weight 0,135 kg, Reflector silver with rotationssymmetrical, deep, wide distributed light intensity. Cover plastic, transparentLuminous flux 873 lm, UGR < 19, Power 1 x 7 W, Light colour neutral white, Correlated color temprature (CCT) 3.500 K, Colour rendering index CRI > 90, Rated life time L80/B10 at 25 °C: 50.000 h, Rated life time L80/B50 at 25 °C: 50.000 h, Housing material: Aluminium / Glass / Plastic, Colour: white structure, Permissible ambient temperature (ta): -20 °C up to +25 °C, Protec-tion class (EN 61140): II, Degree of protection (DIN EN 60529): IP20. With electronic driver, on/off switchable. |  |

| Article data       |                                         |
|--------------------|-----------------------------------------|
| Article no.        | 41611175                                |
| GTIN               | 4251433989844                           |
| Series name        | APOLLO MICRO                            |
| Short description  | LED downlight, round, on/off switchable |
| Material           | Aluminium / Glass / Plastic             |
| Colour             | white structure                         |
| Type of surface    | Structure                               |
| Shape              | Round                                   |
| Outer diameter     | 85 mm                                   |
| Built-in diameter  | 68 mm                                   |
| Installation depth | 68 mm                                   |
| Weight             | 0.135 kg                                |
| D licence plate    | No                                      |
| Conformance        | CE, UKCA                                |


**APOLLO MICRO LED downlight, round, on/off switchable**

Article no. 41611175

| Lighting technology          |           |
|------------------------------|-----------|
| Colour temperature           | 3.500 K   |
| Light colour                 | white     |
| Light output                 | Direct    |
| Luminous flux                | 873 lm    |
| System efficiency            | 125 lm/W  |
| Colour rendering             | CRI > 90  |
| Reflector                    | Faceted   |
| Reflector colour             | silver    |
| Beam angle                   | 55°       |
| Glare evaluation             | UGR < 19  |
| Light sharing                | Symmetric |
| Adjustable color temperature | No        |

| Operating technology of the luminaire |                                                                                                                                                          |
|---------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
| System output                         | 7 W                                                                                                                                                      |
| Voltage type                          | AC                                                                                                                                                       |
| AC nominal voltage max                | 230 V                                                                                                                                                    |
| Frequency max                         | 50 Hz                                                                                                                                                    |
| Lamp                                  | LED                                                                                                                                                      |
| Lamp holder                           | Without fitting                                                                                                                                          |
| Protection class                      | II                                                                                                                                                       |
| Degree of protection                  | IP20                                                                                                                                                     |
| Control                               | on/off                                                                                                                                                   |
| Bulb change possible                  | The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person. |
| Rated life time L80/B10 at 25 °C      | 50.000 h                                                                                                                                                 |
| Rated life time L80/B50 at 25 °C      | 50.000 h                                                                                                                                                 |
| Energy efficiency class               | not required                                                                                                                                             |

| Mounting technology         |                                           |
|-----------------------------|-------------------------------------------|
| Mounting method             | Recessed mounting                         |
| Place of installation       | Ceiling-mounted                           |
| Adjustability               | Not adjustable                            |
| Further references          | No cover with thermal insulation material |
| Material cover              | Plastic, transparent                      |
| Suitable for through-wiring | No                                        |

| Packing data            |                                                                                                                                                                                                                                                                                                                                                                                |
|-------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Gross weight            | 0.173 kg                                                                                                                                                                                                                                                                                                                                                                       |
| Length of packaging     | 85 mm                                                                                                                                                                                                                                                                                                                                                                          |
| Packaging width         | 85 mm                                                                                                                                                                                                                                                                                                                                                                          |
| Packaging height        | 65 mm                                                                                                                                                                                                                                                                                                                                                                          |
| Disposal at end of life | <p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p> |