





**APOLLO MAXI LED downlight, round, DALI**  
Article no. 41614173DA

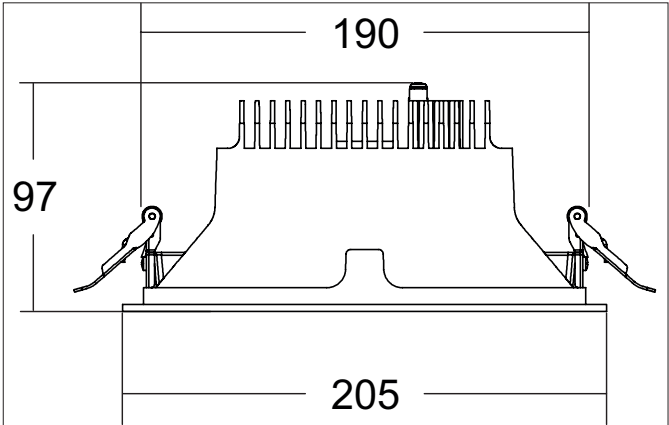

| Tender                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |  |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| LED downlight, round, DALI, Round. Toolless ceiling installation by installation springs. Ceiling cut-out Ø 190 mm, Installation depth 97 mm, Outer diameter 205 mm, Weight 0,67 kg, Reflector silver with rotationssymmetrical, deep, wide distributed light intensity. Cover plastic, transparent Luminous flux 2.632 lm, UGR < 19, Power 1 x 20,5 W, Light colour warm white, Correlated color temprature (CCT) 3.000 K, Colour rendering index CRI > 90, Rated life time L80/B10 at 25 °C: 50.000 h, Rated life time L80/B50 at 25 °C: 50.000 h, Housing material: Aluminium / Glass / Plastic, Colour: white structure, Permissible ambient temperature (ta): -20 °C up to +25 °C, Protection class (EN 61140): II, Degree of protection (DIN EN 60529): IP20. With electronic driver, DALI-2 dimmable. |  |

| Article data       |                             |
|--------------------|-----------------------------|
| Article no.        | 41614173DA                  |
| GTIN               | 4251433989561               |
| Series name        | APOLLO MAXI                 |
| Short description  | LED downlight, round, DALI  |
| Material           | Aluminium / Glass / Plastic |
| Colour             | white structure             |
| Type of surface    | Structure                   |
| Shape              | Round                       |
| Outer diameter     | 205 mm                      |
| Built-in diameter  | 190 mm                      |
| Installation depth | 97 mm                       |
| Weight             | 0.67 kg                     |
| D licence plate    | No                          |
| Conformance        | CE, UKCA                    |


**APOLLO MAXI LED downlight, round, DALI**

Article no. 41614173DA

| Lighting technology          |           |
|------------------------------|-----------|
| Colour temperature           | 3.000 K   |
| Light colour                 | white     |
| Light output                 | Direct    |
| Luminous flux                | 2,632 lm  |
| System efficiency            | 128 lm/W  |
| Colour rendering             | CRI > 90  |
| Reflector                    | Faceted   |
| Reflector colour             | silver    |
| Beam angle                   | 55°       |
| Glare evaluation             | UGR < 19  |
| Light sharing                | Symmetric |
| Adjustable color temperature | No        |

| Operating technology of the luminaire |                                                                                                                                                          |
|---------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
| System output                         | 20.5 W                                                                                                                                                   |
| Voltage type                          | AC                                                                                                                                                       |
| AC nominal voltage max                | 230 V                                                                                                                                                    |
| Frequency max                         | 50 Hz                                                                                                                                                    |
| Lamp                                  | LED                                                                                                                                                      |
| Lamp holder                           | Without fitting                                                                                                                                          |
| Protection class                      | II                                                                                                                                                       |
| Degree of protection                  | IP20                                                                                                                                                     |
| Control                               | DALI-2                                                                                                                                                   |
| Bulb change possible                  | The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person. |
| Rated life time L80/B10 at 25 °C      | 50.000 h                                                                                                                                                 |
| Rated life time L80/B50 at 25 °C      | 50.000 h                                                                                                                                                 |
| Energy efficiency class               | not required                                                                                                                                             |
| max. no. lights on B16 A              | 30                                                                                                                                                       |

| Mounting technology         |                                           |
|-----------------------------|-------------------------------------------|
| Mounting method             | Recessed mounting                         |
| Place of installation       | Ceiling-mounted                           |
| Adjustability               | Not adjustable                            |
| Further references          | No cover with thermal insulation material |
| Material cover              | Plastic, transparent                      |
| Suitable for through-wiring | No                                        |

| Packing data            |                                                                                                                                                                                                                                                                                                                                                                                |
|-------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Gross weight            | 0.83 kg                                                                                                                                                                                                                                                                                                                                                                        |
| Length of packaging     | 205 mm                                                                                                                                                                                                                                                                                                                                                                         |
| Packaging width         | 205 mm                                                                                                                                                                                                                                                                                                                                                                         |
| Packaging height        | 90 mm                                                                                                                                                                                                                                                                                                                                                                          |
| Disposal at end of life | <p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p> |