
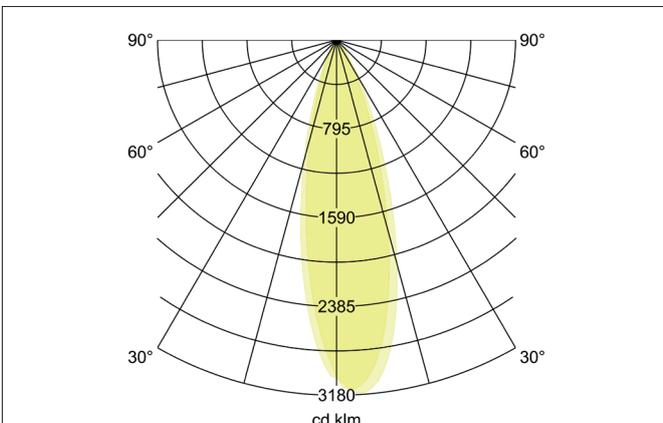


**LANKO-S LED recessed floor light, V4A, IP67, switchable**  
Article no. 14694083

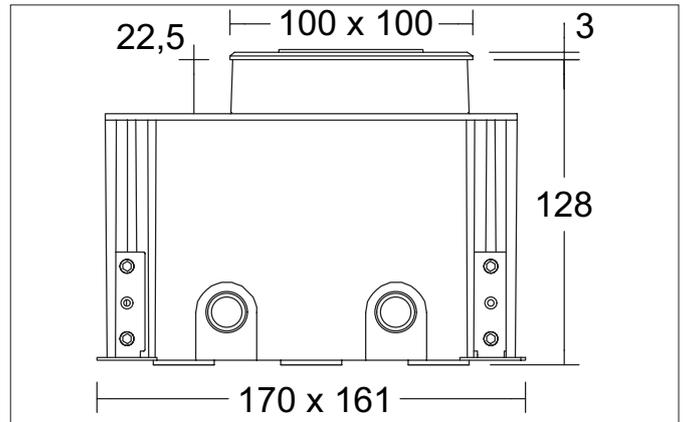

**Tender**  
LED recessed floor light, V4A, IP67, switchable, Angular. Ceiling cut-out L x W 161 x 170 mm, Installation depth 128 mm, Length 100 mm, Width 100 mm, Weight 1,085 kg, with rotationssymmetrical, deep, wide distributed light intensity. Cover glass transparent. Luminous flux 460 lm, Power 1 x 4 W, Light colour warm white, Correlated color temprature (CCT) 3.000 K, Colour rendering index CRI > 80, Rated life time L70/B50 at 25 °C: 50.000 h, , Colour: black, Permissible ambient temperature (ta): -20 to +45°C, Protection class (EN 61140): I, Degree of protection (DIN EN 60529): IP67, shock resistance according to IEC62262: IK08 .With electronic driver, on/off switchable.

**Product Benefits**

- Lens can be tilted 30° in both directions.


**LANKO-S LED recessed floor light, V4A, IP67, switchable**

Article no. 14694083

| Article data                  |  |
|-------------------------------|--|
| Article no.                   | 14694083   |
| GTIN                          | 4255752501510  |
| Series name                   | LANKO-S  |
| Short description             | LED recessed floor light, V4A, IP67, switchable  |
| Colour                        | black  |
| Shape                         | Angular  |
| Length                        | 100 mm   |
| Width                         | 100 mm   |
| Built-in length               | 161 mm   |
| Built-in width                | 170 mm   |
| Installation depth            | 128 mm   |
| Scope of delivery             | incl. converter for connection to 230 V mains voltage, switchable, floor installation pot and 1,000 mm connection cable. |
| Weight                        | 1.085 kg   |
| Length of the connection line | 1,000 mm   |
| Conformance                   | CE, UKCA   |

| Lighting technology          |           |
|------------------------------|-----------|
| Colour temperature           | 3.000 K   |
| Light colour                 | white     |
| Light output                 | Direct    |
| Luminous flux                | 460 lm    |
| System efficiency            | 115 lm/W  |
| Colour rendering             | CRI > 80  |
| Beam angle                   | 30°       |
| Light sharing                | Symmetric |
| Adjustable color temperature | No        |

| Operating technology of the luminaire |  |
|---------------------------------------|--|
| System output                         | 4 W  |
| Voltage type                          | AC   |
| AC nominal voltage max                | 230 V  |
| Frequency max                         | 50 Hz  |
| Lamp                                  | LED  |
| Lamp holder                           | Without fitting  |
| Protection class                      | I  |
| Degree of protection                  | IP67   |
| Ambient temperature                   | -20 to +45 °C  |
| Dimmable                              | No   |
| Control                               | on/off   |
| Length of the connection line         | 1,000 mm   |
| Bulb change possible                  | The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person. |
| Rated life time L70/B50 at 25 °C      | 50,000 h   |
| Energy efficiency class               | not required   |


**LANKO-S LED recessed floor light, V4A, IP67, switchable**

Article no. 14694083

| Mounting technology         |                   |
|-----------------------------|-------------------|
| Mounting method             | Recessed mounting |
| Place of installation       | Floor-mounted     |
| Adjustability               | Pivoted           |
| Swivel angle                | 30°               |
| Rotation angle              | 30°               |
| Max. load                   | 1,000 kg          |
| Over rollable               | No                |
| Impact resistance           | IK08              |
| Material cover              | Glass transparent |
| Circlip                     | Without circlip   |
| Suitable for through-wiring | Yes               |

| Packing data            |  |
|-------------------------|--|
| Gross weight            | 1.3 kg   |
| Length of packaging     | 205 mm   |
| Packaging width         | 205 mm   |
| Packaging height        | 160 mm   |
| Disposal at end of life | <p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p> |