


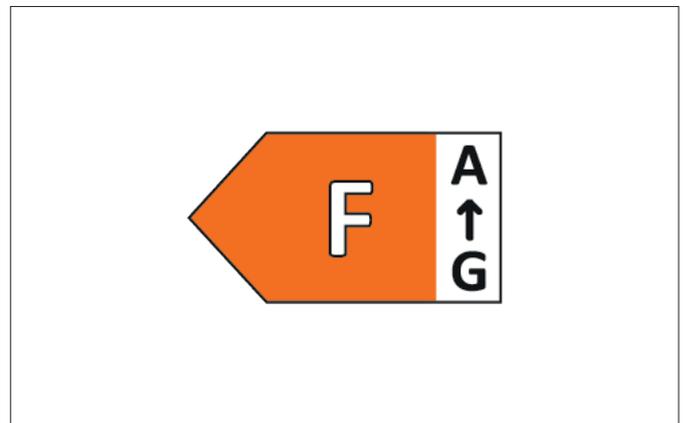


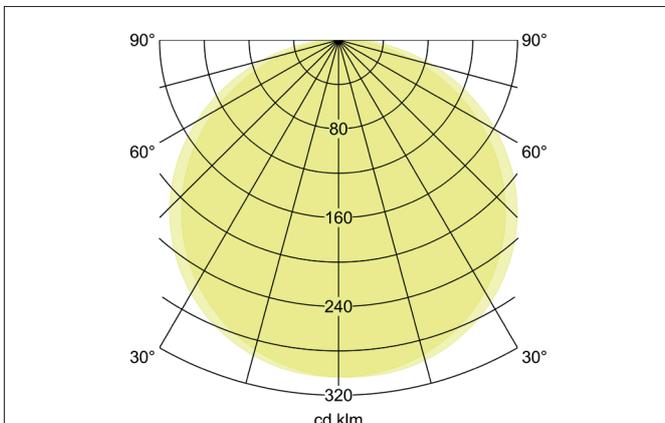

**BYAM-R MAXI LED surface-mounted ceiling downlight, 3CCT, Multipower 17/24 W, IP65, switchable**

Article no. 12512073

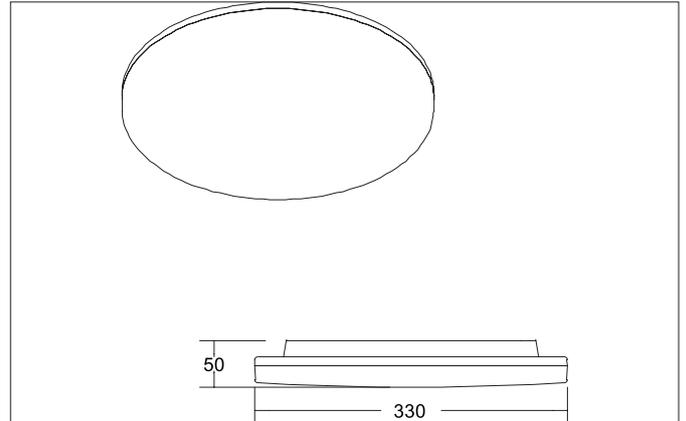

**Tender**  
 LED surface-mounted ceiling downlight, 3CCT, Multipower 17/24 W, IP65, switchable, Round. Luminaire diameter 330.0 mm, Height 50.0 mm Weight 1.075 kg, with rotationssymmetrical, deep, wide distributed light intensity. Cover plastic, opal Luminous flux 2.600 - 2.750 lm, Power 1 x 24 W, Light colour warm white to daylight white, Correlated color temperature (CCT) 3.000 - 5.700 K, Colour rendering index CRI > 80, Rated life time L70/B50 at 25 °C: 50.000 h, Housing material: Plastic, Colour: white matt, Permissible ambient temperature (ta): -20 °C up to +25 °C, Protection class (EN 61140): II, Degree of protection (DIN EN 60529): IP65, shock resistance according to IEC62262: IK10 .With electronic driver, on/off switchable.

**Product Benefits**

- Flat surface-mounted light (diameter 330 mm, height 50 mm, with multipower function 17 W / 24 W) for ceiling or wall mounting.
- 3 CCT adjustable: 3,000 K / 4,000 K / 5,700 K.
- Luminous flux 24 W: 3,000 K: 2,622 lm, 4,000 K: 2,850 lm, 5,700 K: 2,736 lm
- Available in three sizes and 2 shapes (round / square).
- Switchable version.


**BYAM-R MAXI LED surface-mounted ceiling downlight, 3CCT, Multipower 17/24 W, IP65, switchable**

Article no. 12512073

Article data	
Article no.	12512073
GTIN	4255752500827
Series name	BYAM-R MAXI
Short description	LED surface-mounted ceiling downlight, 3CCT, Multipower 17/24 W, IP65, switchable
Material	Plastic
Colour	white matt
Type of surface	Matt
Shape	Round
Outer diameter	330 mm
Height	50 mm
Scope of delivery	incl. converter with power and color temperature selection option for connection to 230 V mains voltage, switchable
Weight	1.075 kg
D licence plate	No
Conformance	CE, UKCA

Lighting technology	
Colour temperature	3.000 K / 4.000 K / 5.700 K
Light colour	white
Color Temperature 1	3,000 K
Color Temperature 2	4,000 K
Color Temperature 3	5,700 K
Light output	Direct
Luminous flux	2,600 - 2,750 lm
Luminous flux 1	2,600 lm
Luminous flux 2	2,750 lm
Luminous flux 3	2,740 lm
System efficiency	115 lm/W
Colour rendering	CRI > 80
Beam angle	120°
Light sharing	Symmetric
Adjustable color temperature	Stages

Operating technology of the luminaire	
System output	24 W
Voltage type	AC
AC nominal voltage max	230 V
Frequency max	50 Hz
Lamp	LED
Protection class	II
Degree of protection	IP65
Dimmable	No
Control	on/off
Bulb change possible	No
Rated life time L70/B50 at 25 °C	50,000 h
Energy efficiency class	F

Mounting technology	
Mounting method	Surface mounting
Place of installation	Ceiling-mounted
Adjustability	Not adjustable
Impact resistance	IK10
Material cover	Plastic, opal

**BRUMBERG**

Light. Since 1873.

**BYAM-R MAXI LED surface-mounted ceiling downlight, 3CCT, Multipower 17/24 W, IP65, switchable**

Article no. 12512073

Packing data	
Gross weight	1.125 kg
Length of packaging	340 mm
Packaging width	340 mm
Packaging height	60 mm
Disposal at end of life	<p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p>

Optional accessories	
Article no.: 81502000	
Mounting spring set for use as recessed ceiling light	
<a href="https://www.brumberg.com/fileadmin/products/Datenblatt_81502000_2021_DE.pdf">https://www.brumberg.com/fileadmin/products/Datenblatt_81502000_2021_DE.pdf</a>	