



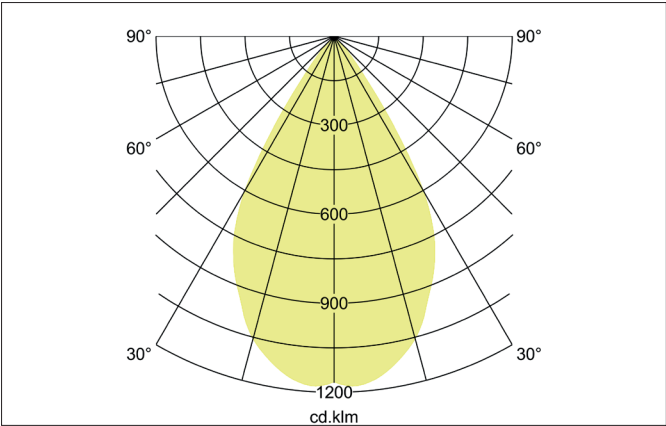

TRAXX MICRO LED track spotlight, on/off switchable
Article no. 88696165

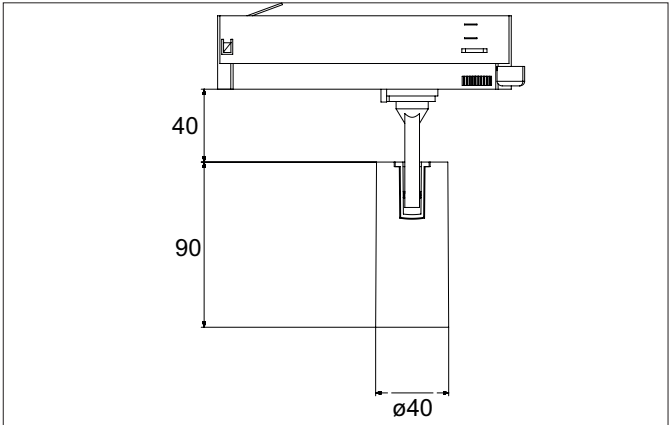

Tender
Round LED track spotlight, rotatable and tiltable, switchable, luminaire diameter 40 mm, weight 0.272 kg, with rotationally symmetrical narrow-wide beam light distribution. Rated luminous flux 1,321 lm, rated wattage 1 x 9.4 W, neutral white light color, most similar color temperature (CCT) 3,500 K, general color rendering index CRI > 90, service life L80/B10 at 25 °C: 50,000 h, service life L80/B50 at 25 °C: 50,000 h, housing material: aluminum / glass / plastic, color: silver structure, permissible ambient temperature (ta): -20 °C - +25 °C, protection class (EN 61140): II, degree of protection (DIN EN 60529): IP20. With electronic control gear, switchable.

Article data	
Article no.	88696165
GTIN	4251433976165
Series name	TRAXX MICRO
Short description	LED track spotlight, on/off switchable
Material	Aluminium / Glass / Plastic
Colour	silver structure
Type of surface	Structure
Shape	Round
Outer diameter	40 mm
Weight	0.272 kg
Conformance	CE, UKCA


TRAXX MICRO LED track spotlight, on/off switchable

Article no. 88696165

Lighting technology	
Colour temperature	3.500 K
Light colour	white
Luminous flux	1,321 lm
System efficiency	141 lm/W
Colour rendering	CRI > 90
Reflector	High-gloss
Beam angle	60°
Light sharing	Symmetric
Adjustable color temperature	No

Operating technology of the luminaire	
System output	9.4 W
Voltage type	AC
AC nominal voltage max	230 V
Frequency max	50 Hz
Lamp	LED
Protection class	II
Degree of protection	IP20
Control	on/off
Bulb change possible	The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person.
Rated life time L80/B10 at 25 °C	50.000 h
Rated life time L80/B50 at 25 °C	50.000 h
Energy efficiency class	nicht erforderlich

Mounting technology	
Mounting method	Surface mounting
Place of installation	Ceiling-mounted
Adjustability	Rotatable and adjustable head
Swivel angle	90°
Rotation angle	350°
Head adjustable angle	90°
Suitable for through-wiring	No

Packing data	
Gross weight	0.335 kg
Length of packaging	225 mm
Packaging width	105 mm
Packaging height	105 mm
Disposal at end of life	This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately. By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.