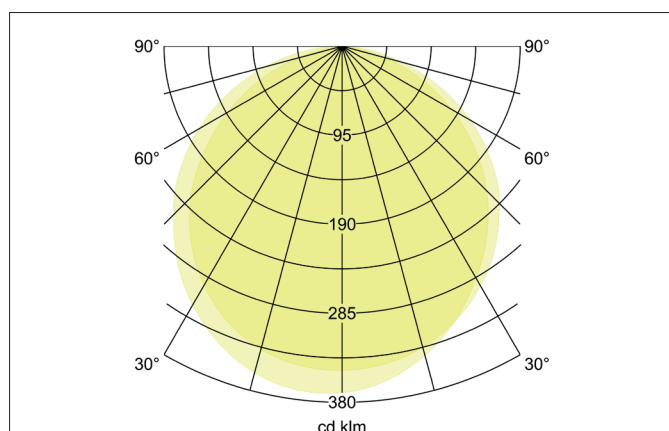
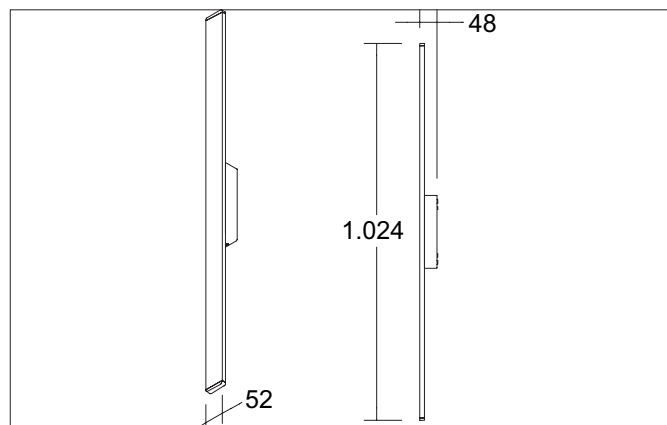



**RICO LED surface-mounted wall light, IP65, switchable**

Article no. 60040103


**Tender**

LED surface-mounted wall light, IP65, switchable, Rectangular. Luminaire length 1024.0 mm, Luminaire width 52.0 mm, Height 48.0 mm Weight 1.2 kg, with rotationssymmetrical, deep, wide distributed light intensity. Cover plastic, opal Luminous flux 1.625 lm, Power 1 x 18 W, Light colour warm white to warm white, Correlated color temprature (CCT) 3.000 - 3.000 K, Colour rendering index CRI > 90, Housing material: Aluminium / Plastic, Colour: graphite structure, Permissible ambient temperature (ta): -20 °C up to +45 °C, Protection class (EN 61140): I, Degree of protection (DIN EN 60529): IP65, shock resistance according to IEC62262: IK06 .With electronic driver, on/off switchable.

| Article data      |                                                                   |
|-------------------|-------------------------------------------------------------------|
| Article no.       | 60040103                                                          |
| GTIN              | 4255752500391                                                     |
| Series name       | RICO                                                              |
| Short description | LED surface-mounted wall light, IP65, switchable                  |
| Material          | Aluminium / Plastic                                               |
| Colour            | graphite structure                                                |
| RAL colour        | 7016                                                              |
| Type of surface   | Structure                                                         |
| Shape             | Rectangular                                                       |
| Length            | 1,024 mm                                                          |
| Width             | 52 mm                                                             |
| Height            | 48 mm                                                             |
| Scope of delivery | incl. converter for connection to 230 V mains voltage, switchable |
| Weight            | 1.2 kg                                                            |
| D licence plate   | No                                                                |
| Conformance       | CE, UKCA                                                          |


**RICO LED surface-mounted wall light, IP65, switchable**

Article no. 60040103

| Lighting technology          |             |
|------------------------------|-------------|
| Colour temperature           | 3.000 K     |
| Light colour                 | white       |
| Light output                 | Indirect    |
| Luminous flux                | 1,625 lm    |
| System efficiency            | 90 lm/W     |
| Colour rendering             | CRI > 90    |
| Luminaire optics             | Cover satin |
| Reflector                    | Without     |
| Beam angle                   | 120°        |
| Light sharing                | Symmetric   |
| Adjustable color temperature | No          |

| Operating technology of the luminaire |                                                                                                                                                          |
|---------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
| System output                         | 18 W                                                                                                                                                     |
| Voltage type                          | AC                                                                                                                                                       |
| AC nominal voltage max                | 230 V                                                                                                                                                    |
| Frequency max                         | 50 Hz                                                                                                                                                    |
| Frequency min                         | 50 Hz                                                                                                                                                    |
| Lamp                                  | LED                                                                                                                                                      |
| Lamp holder                           | LED                                                                                                                                                      |
| Protection class                      | I                                                                                                                                                        |
| Degree of protection                  | IP65                                                                                                                                                     |
| Ambient temperature                   | -20°C up to +45°C                                                                                                                                        |
| Dimmable                              | No                                                                                                                                                       |
| Control                               | on/off                                                                                                                                                   |
| Bulb change possible                  | The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person. |
| Energy efficiency class               | not required                                                                                                                                             |

| Mounting technology         |                  |
|-----------------------------|------------------|
| Mounting method             | Surface mounting |
| Place of installation       | Wall-mounted     |
| Adjustability               | Not adjustable   |
| Impact resistance           | IK06             |
| Further references          | Outdoor          |
| Cover                       | Plastic, opal    |
| Suitable for through-wiring | No               |

| Packing data            |                                                                                                                                                                                                                                                                                                                                                                                |
|-------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Gross weight            | 1.58 kg                                                                                                                                                                                                                                                                                                                                                                        |
| Length of packaging     | 60 mm                                                                                                                                                                                                                                                                                                                                                                          |
| Packaging width         | 55 mm                                                                                                                                                                                                                                                                                                                                                                          |
| Packaging height        | 1,080 mm                                                                                                                                                                                                                                                                                                                                                                       |
| Disposal at end of life | <p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p> |