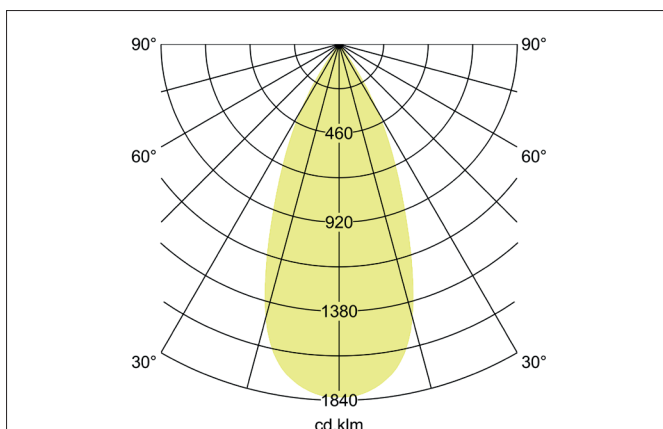
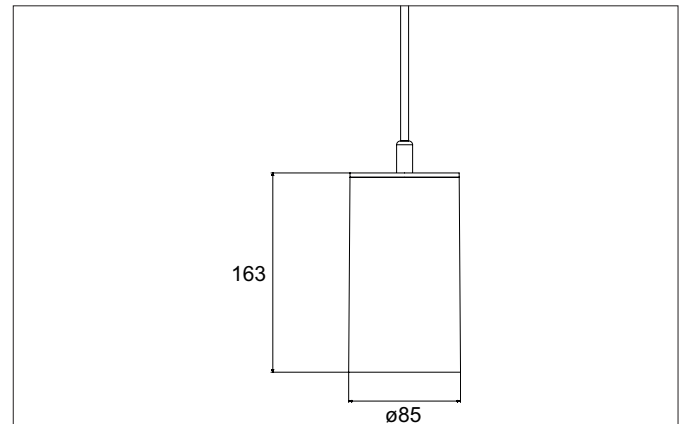



**TRAXX MAXI LED pendant luminaire, DALI**

Article no. 88884163DA


**Tender**

LED pendant luminaire, DALI, Round. Luminaire diameter 85.0 mm, Height 163.0 mm, for pendulum mounting. Pendulum length max. 1500.0 mm Weight 0.914 kg, with rotationssymmetrical, deep, wide distributed light intensity. Cover glass transparent Luminous flux 3.710 lm, Power 1 x 26,4 W, Light colour warm white, Correlated color temperature (CCT) 3.000 K, Colour rendering index CRI > 90, Rated life time L80/B50 at 25 °C: 50.000 h, Housing material: Aluminium / Glass / Plastic, Colour: silver structure, Permissible ambient temperature (ta): -20 °C up to +25 °C, Protection class (EN 61140): I, Degree of protection (DIN EN 60529): IP20. With electronic driver, DALI dimmable.

**Product Benefits**

Auch als In-Track-Pendelleuchte mit Schienenadapter verwendbar.

Schienenadapter (Art.-Nr. 87138070, 87138080, 87138680) sind separat zu bestellen.


**TRAXX MAXI LED pendant luminaire, DALI**

Article no. 88884163DA

| Article data      |                             |
|-------------------|-----------------------------|
| Article no.       | 88884163DA                  |
| GTIN              | 4251433995203               |
| Series name       | TRAXX MAXI                  |
| Short description | LED pendant luminaire, DALI |
| Material          | Aluminium / Glass / Plastic |
| Colour            | silver structure            |
| Type of surface   | Structure                   |
| Shape             | Round                       |
| Outer diameter    | 85 mm                       |
| Hight             | 163 mm                      |
| Weight            | 0.914 kg                    |
| D licence plate   | No                          |
| Conformance       | CE, UKCA                    |

| Lighting technology          |               |
|------------------------------|---------------|
| Colour temperature           | 3.000 K       |
| Light colour                 | white         |
| Light output                 | Direct        |
| Luminous flux                | 3,710 lm      |
| System efficiency            | 132 lm/W      |
| McAdam-Step                  | McAdam-Step 3 |
| Colour rendering             | CRI > 90      |
| Reflector                    | High-gloss    |
| Beam angle                   | 40°           |
| Light sharing                | Symmetric     |
| Adjustable color temperature | No            |

| Operating technology of the luminaire |                                                                                                                                                          |
|---------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
| System output                         | 28 W                                                                                                                                                     |
| Voltage type                          | AC                                                                                                                                                       |
| AC nominal voltage max                | 230 V                                                                                                                                                    |
| Frequency max                         | 50 Hz                                                                                                                                                    |
| Lamp                                  | LED                                                                                                                                                      |
| Lamp holder                           | Without fitting                                                                                                                                          |
| Protection class                      | I                                                                                                                                                        |
| Degree of protection                  | IP20                                                                                                                                                     |
| Dimmable                              | Yes                                                                                                                                                      |
| Control                               | DALI                                                                                                                                                     |
| Bulb change possible                  | The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person. |
| Rated life time L80/B50 at 25 °C      | 50.000 h                                                                                                                                                 |
| Energy efficiency class               | not required                                                                                                                                             |

| Mounting technology         |                   |
|-----------------------------|-------------------|
| Mounting method             | Suspended         |
| Place of installation       | Ceiling-mounted   |
| Adjustability               | Not adjustable    |
| Pendulum length max.        | 1,500 mm          |
| Cover                       | Glass transparent |
| Suitable for through-wiring | No                |



**TRAXX MAXI LED pendant luminaire, DALI**  
Article no. 88884163DA

| Packing data            |                                                                                                                                                                                                                                                                                                                                                                                |
|-------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Gross weight            | 0.98 kg                                                                                                                                                                                                                                                                                                                                                                        |
| Length of packaging     | 170 mm                                                                                                                                                                                                                                                                                                                                                                         |
| Packaging width         | 170 mm                                                                                                                                                                                                                                                                                                                                                                         |
| Packaging hight         | 110 mm                                                                                                                                                                                                                                                                                                                                                                         |
| Disposal at end of life | <p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p> |