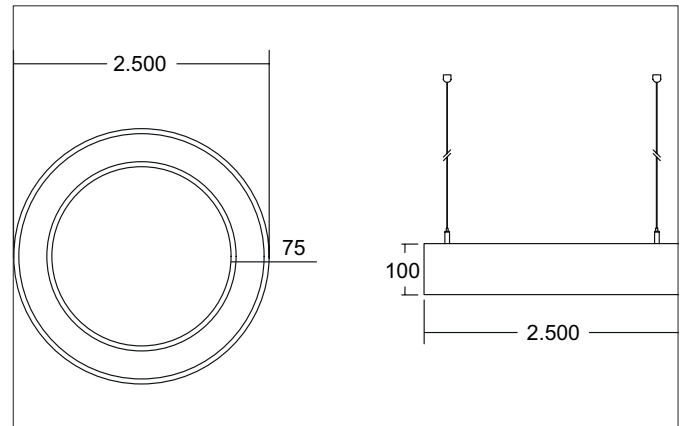



**BIRO CIRCLE LED pendant ring light, direct, dimmable**

Article no. 13558189


**Tender**

LED pendant ring light, direct, dimmable, Round. Luminaire diameter 2500.0 mm, Height 100.0 mm, for pendulum mounting. Pendulum length max. 5000.0 mm Weight 19.5 kg, with rotationssymmetrical, deep, wide distributed light intensity. Cover plastic, opal Luminous flux 26.442 - 27.351 lm, Power 1 x 270 W, Light colour warm white to daylight white, Correlated color temperature (CCT) 2.700 - 6.500 K, Colour rendering index CRI > 90, Rated life time L70/B50 at 25 °C: 276.000 h, Rated life time L80/B20 at 25 °C: 153000 h, Housing material: Aluminium / Steel / Plastic, Colour: black structure, Permissible ambient temperature (ta): -20 °C up to +25 °C, Protection class (EN 61140): I, Degree of protection (DIN EN 60529): IP20. With electronic driver, DALI-DT6 dimmable.

| Article data                  |                                                       |
|-------------------------------|-------------------------------------------------------|
| Article no.                   | 13558189                                              |
| GTIN                          | 4251433965404                                         |
| Series name                   | BIRO CIRCLE                                           |
| Short description             | LED pendant ring light, direct, dimmable              |
| Material                      | Aluminium / Steel / Plastic                           |
| Colour                        | black structure                                       |
| Type of surface               | Structure                                             |
| Shape                         | Round                                                 |
| Outer diameter                | 2500 mm                                               |
| Height                        | 100 mm                                                |
| Scope of delivery             | incl. converter for connection to 230 V mains voltage |
| Weight                        | 19.5 kg                                               |
| Length of the connection line | 5,000 mm                                              |
| D licence plate               | No                                                    |
| Conformance                   | CE, UKCA                                              |


**BIRO CIRCLE LED pendant ring light, direct, dimmable**

Article no. 13558189

| Lighting technology                         |                    |
|---------------------------------------------|--------------------|
| Colour temperature                          | 2.700 K - 6.500 K  |
| Light colour                                | white              |
| Color Temperature 1                         | 2,700 K            |
| Color Temperature 2                         | 6,500 K            |
| Light output                                | Direct/Indirect    |
| Luminous flux                               | 26,442 - 27,351 lm |
| Luminous flux component (direct / indirect) | 70/30 %            |
| System efficiency                           | 101 lm/W           |
| McAdam-Step                                 | McAdam-Step 3      |
| Colour rendering                            | CRI > 90           |
| Reflector                                   | Without            |
| Beam angle                                  | 110°               |
| Light sharing                               | Symmetric          |
| Adjustable color temperature                | No                 |

| Operating technology of the luminaire |                                                                                                                                                          |
|---------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
| System output                         | 270 W                                                                                                                                                    |
| Voltage type                          | AC/DC                                                                                                                                                    |
| AC nominal voltage max                | 230 V                                                                                                                                                    |
| Frequency max                         | 50 Hz                                                                                                                                                    |
| Lamp                                  | LED                                                                                                                                                      |
| Lamp holder                           | Without fitting                                                                                                                                          |
| Protection class                      | I                                                                                                                                                        |
| Degree of protection                  | IP20                                                                                                                                                     |
| Dimmable                              | Yes                                                                                                                                                      |
| Control                               | DALI-DT6, DALI-DT8                                                                                                                                       |
| Length of the connection line         | 5,000 mm                                                                                                                                                 |
| Bulb change possible                  | The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person. |
| Rated life time L70/B50 at 25 °C      | 276,000 h                                                                                                                                                |
| Rated life time L80/B20 at 25 °C      | 153000 h                                                                                                                                                 |
| Rated life time L90/B10 at 25 °C      | 74000 h                                                                                                                                                  |
| Energy efficiency class               | not required                                                                                                                                             |

| Mounting technology              |                 |
|----------------------------------|-----------------|
| Mounting method                  | Suspended       |
| Place of installation            | Ceiling-mounted |
| Adjustability                    | Not adjustable  |
| Pendulum length max.             | 5,000 mm        |
| Pendant length single suspension | 500 - 5.000 mm  |
| Pendulum length centre canopy    | 1000 - 10000 mm |
| Number of cable suspensions      | 6               |
| Material cover                   | Plastic, opal   |

| Packing data            |                                                                                                                                                                                                                                                                                                                                                                                |
|-------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Gross weight            | 21.5 kg                                                                                                                                                                                                                                                                                                                                                                        |
| Length of packaging     | 2,200 mm                                                                                                                                                                                                                                                                                                                                                                       |
| Packaging width         | 700 mm                                                                                                                                                                                                                                                                                                                                                                         |
| Packaging height        | 350 mm                                                                                                                                                                                                                                                                                                                                                                         |
| Disposal at end of life | <p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p> |